

SAFETY COMPLIANCE TESTING FOR
FMVSS NO. 122: MOTORCYCLE BRAKE SYSTEMS

Test Vehicle: 2002 SUZUKI DR-Z-400SK2

NHTSA No. C21200

Manufacturer: Suzuki Motor Corporation

Report No. 122-CE-03-001

CARTER ENGINEERING
5735 North Lick Creek Road
Franklin, Tennessee 37064



JANUARY 2003
FINAL REPORT

Prepared for

U. S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Enforcement
Office of Vehicle Safety Compliance
400 Seventh Street, SW
Room 6115 (NVS-220)
Washington, DC 20590

This publication is distributed by the U. S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.


Prepared By: Thomas J. Cost

Approved By: Thomas J. Cost

Approval Date: 8/31/2003

FINAL REPORT ACCEPTANCE BY OVSC:

Accepted By:

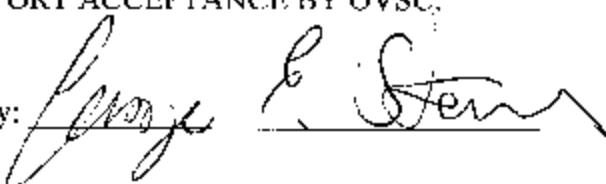

Acceptance Date: SEP 17 2003

Technical Report Documentation Page

1. Report No. 122-CE-03-001	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS No. 122 Compliance Testing of 2002 Suzuki DR-Z400SK2. NHTSA No. C21200		5. Report Date January 15, 2003	
		6. Performing Organization Code CAE	
7. Author(s) Thomas J. Carter, Project Engineer		8. Performing Organization Report No CE-DOT-001	
9. Performing Organization Name and Address Carter Engineering 5735 North Lick Creek Road Franklin TN 37064		10. Work Unit No.	
		11. Contract No. DTNH22-02-P-01131	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Ofc of Veh Safety Compliance (NVS-220) 400 7th St SW, Washington, DC 20590		13. Type of Report and Period Covered Final Test Report October 2, 2002 to January 15, 2003	
		14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes			
16. Abstract Compliance tests were conducted on the subject 2002 Suzuki DR-Z400SK2 motorcycle in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-122-01 for the determination of Federal Motor Vehicle Safety Standard No. 122 compliance. Test failures identified were as follows: None.			
17. Key Words Compliance Testing FMVSS No. 122 Safety Engineering	18. Distribution Statement Copies of this report are available from -- NHTSA Technical Reference Division Mail Code: NAD-40 400 Seventh Street, SW Room 5108 Washington, DC 20590		
19. Security Classif. (of this report) UNCLASSIFIED	20. Security Classif. (of this page) UNCLASSIFIED	21. No. of Pages 50	22. Price N/A

Table of Contents

	<u>Page</u>
1.0 Purpose.....	1
2.0 Definitions.....	1
3.0 Test Vehicle	3
3.1 General Description	3
3.2 Tires	3
3.3 Weights	4
3.4 Brakes	4
3.5 Receiving Inspection of the Test Motorcycle	5
4.0 Method	5
4.1 Test Facility.....	5
4.2 Test Facility Layout	5
4.3 Instrumentation	6
4.4 Preparation of the Test Motorcycle.....	7
4.5 Test Procedure	7
5.0 Data Sheets.....	7
Data Sheet No. 1 – Test Summary.....	8
Data Sheet No. 2 – Vehicle Brake System Inspection	9
Data Sheet No. 3 Instrumentation Check	11
Data Sheet No. 4 First Preburnish Effectiveness Test.....	13
Data Sheet No. 5 First Preburnish Effectiveness Test - Partial Service Brake System	15
Data Sheet No. 6 – First Burnish Procedure.....	17
Data Sheet No. 7 – Second Effectiveness Test.....	18
Data Sheet No. 8 – Fade And Recovery Test	20
Data Sheet No. 9 – Second Burnish Procedure	23
Data Sheet No. 10 – Final Effectiveness Test	24
Data Sheet No. 11 – Partial Service Brake System-Split System.....	26
Data Sheet No. 12 – Parking Brake Test	28
Data Sheet No. 13 – Wet Recovery Test	29
Data Sheet No. 14 – Final Inspection	31
APPENDIX 1 Instrumentation List	32
APPENDIX 2 Hand Lever/Foot Pedal Actuation Force Calibration Curves	34
APPENDIX 3 Calculation of Master Cylinder Reservoir Volumes.....	36

	<u>Page</u>
APPENDIX 4 Photographs.....	38
Photograph 1. Right Side View of the Test Motorcycle	39
Photograph 2. Left Side View of the Test Motorcycle	39
Photograph 3. Test Motorcycle NHTSA Number.....	40
Photograph 4. Test Motorcycle Vehicle Certification Label	40
Photograph 5. Front Brake System Master Cylinder Reservoir Cover	41
Photograph 6. Rear Brake System Master Cylinder Reservoir Cover	41
Photograph 7. Digital Data Recorder	42
Photograph 8. Multiplexer - Attached to Rear of Motorcycle Seat	42
Photograph 9. Brake Application Relay and Taillight Plug-in	43
Photograph 10. Data Recorder Start Button and Mechanical Counter	43
Photograph 11. Strain Gage Installation on Front Brake Lever	44
Photograph 12. Strain Gage Installation on Rear Brake Pedal	44
Photograph 13. Distance/Speed Sensor	45
Photograph 14. Typical Disk Brake Pad Thermocouple Installation.....	45

List of Figures

	<u>Page</u>
Figure 1. Layout of Tullahoma Regional Airport	6

1.0 Purpose

The purpose of this test program was to determine compliance of the subject motorcycle brake system by subjecting it to the tests of Federal Motor Vehicle Safety Standard (FMVSS) No. 122.

2.0 Definitions

- 2.1 Initial Speed or Test Speed** — The travel speed of the motorcycle at the moment either brake is applied.
- 2.2 Brake Application** — The initial movement of the brake system control pedal and/or lever.
- 2.3 Braking Interval** — The distance measured from the start of one brake application to the start of the next brake application.
- 2.4 Initial Brake Temperature (IBT)** — The temperature of the service brake at 0.32 km (0.2 mile) before a stop with the brakes released.
- 2.5 Stopping Distance** — The distance traveled by a vehicle from the start of the brake application to the point where the vehicle stops.
- 2.6 Curb Weight** — The total weight of the motorcycle with standard equipment including the maximum capacity of fuel, lubricants, and coolant, but without operator, passenger, instrumentation, or cargo.
- 2.7 Basic Test Weight** — The total weight of the motorcycle with standard equipment, the maximum capacity of fuel, lubricants, and coolant, and test instrumentation. Weight is without operator, passenger, or additional cargo.
- 2.8 Test Weight** — The total as-tested weight of the motorcycle including test instrumentation and operator.
- 2.9 Lightly Loaded Vehicle Test Weight (LLVW)** — Curb Weight plus 91 kg (200 lb). The 91 kg (200 lb) load includes test instrumentation and operator. If the combined operator and instrumentation weight total is less than 91 kg (200 lb), ballast shall be added to achieve the proper loading. Any ballast added shall be distributed in the saddle or carrier if so equipped.
- 2.10 Wheel Lockup** — Wheel lockup means 100 percent wheel slip.
- 2.11 Independent Braking System**
 - 2.11.1 FOR TWO-WHEELED MOTORCYCLE** — A system which acts on only one wheel.

2.12 Combined Braking System

- 2.12.1 **FOR TWO-WHEELED MOTORCYCLE** — A system whereby at least two brakes on different wheels are actuated by the operation of a single control.
- 2.13 Hydraulic Brake System** — A system that uses hydraulic fluid as a medium for transmitting forces from a service brake control to the service brake.
- 2.14 Mechanical Brake System** — A system that uses direct mechanical connections such as push/pull rods, cables, linkages, etc for transmitting forces from a service brake control to the service brake.
- 2.15 Maximum Speed (V_{max})** — For the purpose of FMVSS No. 122 brake testing, the maximum speed is the highest speed attainable by accelerating at a maximum rate from a standing start for a distance 1.6 km (1 mile) on a level surface, with the vehicle at its lightly loaded weight.
- 2.16 Braking Ratio (BR)** — The braking ratio is the average deceleration rate of the vehicle divided by the gravitational acceleration constant.
- 2.17 Average Deceleration Rate** — The average deceleration rate during the stop is calculated using initial speed and stopping distance. The following equation is used to calculate average deceleration:
- $$a = \frac{v^2}{2d}$$
- Where:
- a = average deceleration rate (m/s^2)
 - v = velocity (m/s)
 - d = stopping distance (m)
- 2.18 Swept Area** — The swept area of a disk brake is the total area contacted by both inboard and outboard brake pads in one revolution, i.e., the area on both sides of the rotor rubbed by the pads. The swept area of a drum brake is the inside drum circumference multiplied by the brake lining width.
- 2.19 Split Service Brake System** — A brake system consisting of two or more subsystems actuated by a single control designed so that a leakage-type failure of a pressure component in a single subsystem (except structural failure of a housing that is common to two or more subsystems) does not impair the operation of any other subsystem.
- 2.20 Motorcycle** — A motor vehicle with motive power having a seat or saddle for the use of the rider and designed to travel on not more than three wheels in contact with the ground.
- 2.21 Motor-Driven Cycle** — A motorcycle with a motor that produces 5 brake horsepower or less.

3.0 Government Furnished Property

3.1 General Description

NHTSA Number	C21200
Manufacturer	Suzuki Motor Corporation
Year	2002
Model	DR-Z400SK2
Date of Manufacture	October 2001
VIN	JS1SK43A922102123
Engine Type	Single Cylinder, Four-stroke, Liquid-cooled, DOHC
Engine Displacement	398 cm ³
Fuel Delivery	Carburetor (single)
Transmission	5-speed manual
Final Drive	Chain
Wheelbase	1485 mm

3.2 Tires

	Front	Rear
Manufacturer	Bridgestone	Bridgestone
Type	Trail Wing 41 - Tube Type	Trail Wing 42 - Tube Type
Size	80/100 - 21 51P	120/90 - 18 65P
DOT Number	DOT ENEK TAC 3901	DOT ENNM TAB 3901
Pressure (cold)	125 kPa	150 kPa
Rolling Radius	≈ 34 cm	≈ 32.5 cm
Rim Label Information	Takasago J 21 x 1.60 DOT 127 Japan 10 01	Takasago J 18 x 2.15 DOT 184 Japan 10 01

3.3 Weights

	Front Wheel		Rear Wheel		Total
	Weight(kg)	% of Total	Weight(kg)	% of Total	Weight(kg)
Curb Weight	68.0	47.2	76.2	52.8	144.2
Curb Weight+Rider	96.6	42.8	129.3	57.2	225.9
Basic Test Weight	69.0	44.9	84.8	55.1	153.8
Test Weight	96.6	41.3	137.4	58.7	234.0
Instrumentation					9.6
Test Rider					80.2
Total Load (Weight of Instrumentation + Weight of Test Rider)					89.8
Gross Vehicle Weight Rating (GVWR)					335

3.4 Brakes

	Front	Rear
System Type	Disk/Hydraulic/Independent/ Non-ABS	Disk/Hydraulic/Independent/ Non-ABS
Control	Right hand lever actuates front wheel brake	Rear foot pedal actuates rear wheel brake
Caliper Type	Single Acting	Single Acting
Number of Calipers	1	1
No. of Caliper Pistons/Equal Dia.?	2 / Yes	1 / N/A
Caliper Piston Diameter	26 mm	26 mm
Rotor - Type/Number	Fixed/Single	Fixed/Single
Drilled?/Number of Holes/Hole Dia.	Yes / 48 / 10 mm	Yes / 54 / 9 mm
Rotor Diameter	250 mm	220 mm
Rotor Thickness/Minimum Allowable Thickness	3.2 mm / 3.0 mm	4.5 mm / 4.0 mm
Rotor Effective Diameter	224 mm	194 mm
Swept Area	341 cm ²	295 cm ²
Brake Pad Identification Numbers	Nissin - TT2172HH	Nissin - TT2182PP
Brake Lever/Pedal Ratio (@FMVSS No. 122 Load Application Point)	6.1	6.7

3.5 Receiving Inspection of the Test Motorcycle

As-Received odometer reading	0.3 miles
Operator Manual received?	Yes
Service Manual received?	No
Speedometer display	U.S. + Metric
Mechanical condition	New
Mechanical condition adequate to complete test procedure?	Yes
Arc brake hoses labeled per FMVSS No. 106?	Yes
Tire Condition @ Start of Test	New
Are brake components in new OEM Condition?	Yes

4.0 Method

The tests of FMVSS No. 122 involve straight line braking from various speeds, brake burnishing, fade and recovery, and wet brake fade and recovery. All tests were performed by an experienced rider. FMVSS No. 122 requires stops from near maximum speed, however, for this test program NHTSA has limited the maximum test speed to 80 mph (128.7 km/h).

4.1 Test Facility

Testing was conducted at the Tullahoma Regional Airport in Tullahoma, Tennessee. The layout of the airport is shown in Figure 1. The inactive Northwest-Southeast runway was used for this test program. A total straightaway distance of approximately 1.77 km (1.1 mile) was available by crossing the two active runways. Airport authority coordination was required to cross active runways and this option was used only for maximum speed test runs. For the maximum speed runs, the airport manager was notified by the test engineer and the test runs were conducted per the airport manager's instructions. The concrete surface is substantially level (less than $\pm 1\%$ gradient), in good condition, and affords good adhesion. The runways are 45.7 m (150 ft) wide. The airport altitude is approximately 330.7 m (1085 ft) above sea level.

4.2 Test Facility Layout

For each test procedure, traffic cones are set up to indicate the initial temperature record point, brake application point, target stop distances, and cool down distance if required. The layouts were altered as required to accommodate airport traffic and runway/taxiway use restrictions.

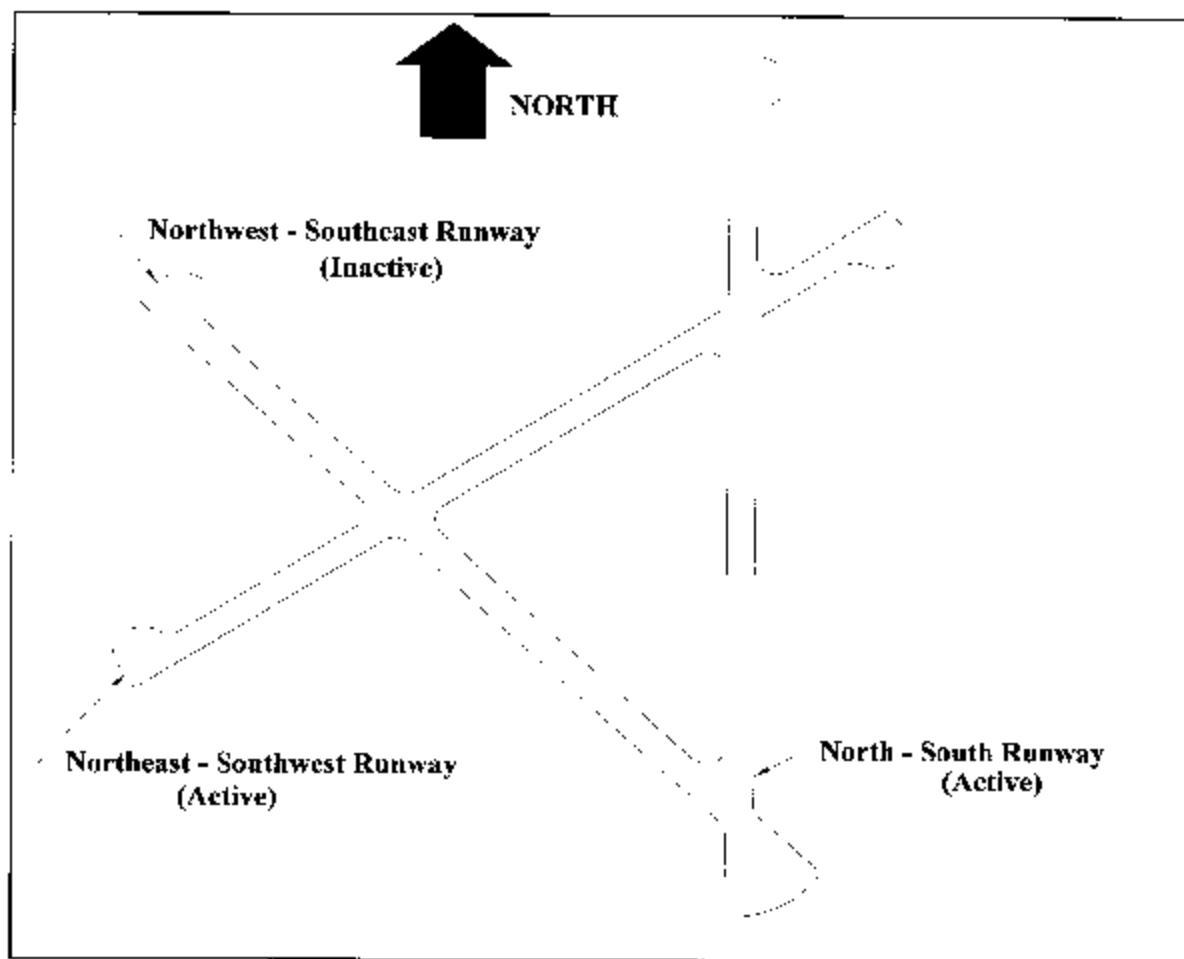


Figure 1. Layout of Tullahoma Regional Airport

4.3 Instrumentation

A lightweight instrumentation package was used for data acquisition during this program. The package included a data recorder, multiplexer, power supplies, and sensors. The following sensors were fitted to the test motorcycle:

- A third wheel to measure distance.
- Actuation forces were measured by strain gages fitted to the front hand brake lever and the rear brake pedal.
- Thermocouples were installed in the front and rear brake linings to measure brake temperatures.

The digital data recorder and multiplexer were used to record brake forces and distance versus time. Speed and deceleration were calculated from the distance versus time data. A handlebar mounted push button switch activated the initial temperature recording function and started the data recording. Application of either the front or rear brake marked the beginning of the stop. The data recorder acquired data until the motorcycle

stopped. A test data summary was displayed at the end of each stop. A description of the instrumentation system is provided in the Contractor Test Procedure for FMVSS No.122 - Motorcycle Brake Systems, November, 2002. The instrumentation list is provided in Appendix 1 and the brake hand lever and pedal calibration curves are in Appendix 2.

4.4 Preparation of the Test Motorcycle

Refer to Contractor Test Procedure for FMVSS No. 122 - Motorcycle Brake Systems, November, 2002, Thomas J. Carter, Carter Engineering.

4.5 Test Procedure

Refer to Contractor Test Procedure for FMVSS No. 122 - Motorcycle Brake Systems, November, 2002, Thomas J. Carter, Carter Engineering.

5.0 Data Sheets

5. Data Sheet No. 1 – Test Summary

Test Vehicle: NHTSA C21200				Test Date(s): 12/15/02 & 12/16/02			
Test runs selected for compliance.							
Test Section	Speed (km/h)	BR ¹	Stop Dist. (m)	Max. Brake Lever Force (N)	Max. Brake Pedal Force (N)	No. of Tests	Pass or Fail?
1st Effectiveness Test – 48.3 km/h (Service Brake System)	48.8	0.78	11.9	132	147	6	PASS
1st Effectiveness Test - 96.6 km/h (Service Brake System)	95.4	0.79	45.2	109	87	6	PASS
1st Effectiveness Test - 48.3 km/h (Partial – Right Hand Lever Only)	48.0	0.65	13.9	127	N/A	6	PASS
1st Effectiveness Test - 48.3 km/h (Partial – Right Foot Pedal Only)	48.1	0.34	26.7	N/A	162	6	PASS
1st Effectiveness Test – 96.6 km/h (Partial – Right Hand Lever Only)	95.4	0.74	48.4	115	N/A	6	PASS
1st Effectiveness Test – 96.6 km/h (Partial - Right Foot Pedal Only)	96.4	0.39	92.8	N/A	166	6	PASS
2nd Effectiveness Test - 48.3 km/h (Service Brake System)	48.4	0.79	11.7	173	91	6	PASS
2nd Effectiveness Test – 96.6 km/h (Service Brake System)	95.5	0.85	42.4	148	69	6	PASS
2nd Effectiveness Test – 128.7 km/h (Service Brake System)	127.7	0.86	74.5	172	93	4	PASS
Fade and Recovery (Baseline Average Maximum Forces)	N/A	N/A	N/A	29	85.3	3	N/A
Fade and Recovery (Recovery - 5 th stop)	48.4	0.32	28.5	31	83	5	PASS
Final Effectiveness Test - 48.3 km/h (Service Brake System)	48.1	0.75	12.2	234	76	6	PASS
Final Effectiveness Test – 96.6 km/h (Service Brake System)	96.2	0.75	48.5	97	71	6	PASS
Final Effectiveness Test – 128.7 km/h (Service Brake System)	127.9	0.78	82.8	95	69	4	PASS
Water Recovery (Baseline – Average Maximum Forces)	N/A	N/A	N/A	29.7	86.3	3	N/A
Water Recovery (Recovery - 5 th stop)	49.0	0.33	29.0	33	95	5	PASS

Note: All testing and data recording was performed by the report author: Thomas J. Carter, P.E.

¹ BR – Braking Ratio – The deceleration rate divided by the gravitational constant.

5. Data Sheet No. 2 – Vehicle Brake System Inspection

Test Vehicle: NHTSA C21200	Test Date(s): 12/15/02 & 12/16/02		
Vehicle Brake System Inspection Requirements	Test Vehicle Compliance	Data	
		Yes	No
S5.1 - Motorcycle shall have either a split service brake system or two independently actuated service brake systems.	Motorcycle has split service brake system?		X
	Motorcycle has two independently actuated service brake systems?	X	
S5.1.1 - Failure of any component in a mechanical service brake system shall not result in a loss of braking ability in the other service brake system on the vehicle.	If vehicle has a mechanical service brake system, would component failure result in loss of braking in other service brake system?	N/A	N/A
S5.1.2 - Leakage failure in hydraulic service brake system shall not result in a loss of braking ability in other service brake system on the vehicle.	If vehicle has hydraulic service brake system, would leakage failure in one service brake system result in a loss of braking ability in other service brake system?		X
S5.1.2.1 - Each master cylinder shall have a separate reservoir for each brake circuit, with each reservoir filler opening having its own cover, seal, and cover retention device. Each reservoir shall have a minimum capacity equivalent to one and one-half times the total fluid displacement resulting when all the wheel cylinders or caliper pistons serviced by the reservoir move from a new lining, fully retracted position to a fully worn, fully applied position. Where adjustment is a factor, the worst condition of adjustment shall be used for this measurement. (See Appendix 3 for information on reservoir capacity measurement)	Vehicle meets master cylinder reservoir requirements?	X	
	Front Service Brake System		
S5.1.2.2 - Each motorcycle shall have a brake fluid warning statement that reads as follows, in letters at least three thirty-seconds of an inch high: Warning: clean filler cap before removing. Use only —fluid from a sealed container. (Inserting the recommended type of brake fluid as specified in 49 CFR 571.116, e.g., DOT 3.) The lettering shall be:	Vehicle meets master cylinder warning statement requirements?		X
	Front Service Brake System		
(A) Permanently affixed, engraved, or embossed	Vehicle meets master cylinder warning statement requirements?	X	
	Rear Service Brake System		
(B) Located so as to be visible by direct view, either on or within 4 inches of the brake-fluid reservoir filler plug or cap	Vehicle meets master cylinder warning statement requirements?		X
	Rear Service Brake System		
(C) Of a color that contrasts with its background, if it is not engraved or embossed	Type of brake fluid required?	DOT 4	

5. Data Sheet No. 2 – Vehicle Brake System Inspection...Continued

Vehicle Brake System Inspection Requirements	Test Vehicle Compliance	Data	
		Yes	No
S5.1.3 - (A) Each motorcycle equipped with a split service brake system shall have one or more electrically operated service brake system failure indicator lamps that is mounted in front of and in clear view of the driver, and that is activated -- (1) In the event of pressure failure in any part of the service brake system, other than a structural failure of either a brake master cylinder body in a split integral body type master cylinder system or a service brake system failure indicator body, before or upon application of not more than 20 lb of pedal force upon the service brake. (2) Without the application of pedal force, when the level of brake fluid in a master cylinder reservoir drops to less than the recommended safe level specified by the manufacturer or to less than one-half the fluid reservoir capacity, whichever is the greater. (B) All failure indicator lamps shall be activated when the ignition switch is turned from the "off" to the "on" or to the "start" position. (C) Except for the momentary activation required by S5.1.3 1(b), each indicator lamp once activated, shall remain activated as long as the condition exists, whenever the ignition switch is in the "on" position. An indicator lamp activated when the ignition is turned to the "start" position will be deactivated upon return of the switch to the "on" position unless a failure exists in the service brake system. (D) Each indicator lamp shall have a red lens with the legend "Brake Failure" on or adjacent to it in letters not less than three thirty-seconds of an inch high that shall be legible to the driver in daylight when lighted.	Does vehicle have a brake system failure indicator lamp?	N/A	N/A
S5.1.4 - Each three-wheeled motorcycle shall be equipped with a parking brake of a friction type with a solely mechanical means to retain engagement.	Does failure indicator lamp conform to operational and physical requirements?	N/A	N/A
S5.1.5 - The brake system shall be installed so that the lining thickness of the drum brake shoes may be visually inspected, either directly or by use of a mirror without removing the drums, and so that disc brake friction lining may be visually inspected without removing the pads.	Can the drum brake lining thickness or disc brake friction lining thickness be determined without removal of drum or disc brake pads? Front Service Brake System	X	
	Can the drum brake lining thickness or disc brake friction lining thickness be determined without removal of drum or disc brake pads? Rear Service Brake System	X	

5. Data Sheet No. 3 Instrumentation Check (S7.2)

Vehicle: C21200	Test Rider: T.Carter
-----------------	----------------------

Conduct a general check of test instrumentation by making not more than 10 stops from a speed of not more than 48.3 km/h (30 mph) at a deceleration of not more than 3 m/s^2 (10 ft/s^2). If test instrument repair, replacement, or adjustment is necessary, make not more than 10 additional stops after such repair, replacement or adjustment.

Date	Number of check stops.	Reason for check stops.
12/15/02	7	Beginning of test – check out/warm-up engine/tires - OK.
12/16/02	4	Re-soldered connector wire – checks OK.
12/25/02	0	Post-test calibration check – OK.

5. Data Sheet No. 3...Continued

Maximum Speed Determination (Part 571.3)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
N/A	C21200	T. Carter	N/A	N/A
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
N/A	N/A	N/A	Front	Rear
			125	150

Test Conditions:

Test speed	Maximum speed (V_{max}) attainable in 1.6 km from a standing start.
Initial Brake Temperature (IBT)	N/A
Runs Required	At least two runs shall be made in opposite directions.
Determine:	Test speed for 2 nd , & Final Effectiveness tests and/or Reduced Test Speed, as appropriate.

Run No.	Run Dist (km)	Top Speed (km/h)
1	1.3+	N/A
2	1.3+	N/A
3	1.3+	N/A
4	1.3+	N/A
Average V_{max}		N/A
Test Speed Or Reduced Test Speed ²		N/A

Remarks: No maximum speed runs were conducted – vehicle was capable of speeds equal to or greater than the 80 mph limit speed imposed by NHTSA.

² Reduced Test Speed: If a motorcycle is incapable of attaining a specified test speed, it shall be tested at a speed that is a multiple of 5 mph that is 4 to 8 mph less than the motorcycle's maximum speed (V_{max}).

5. Data Sheet No. 4 First Preburnish Effectiveness Test – Service Brake System (S7.3.1)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
12/15/02	C21200	T. Carter	2.9	11.4
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
7.2°C	6 km/h from Southwest	Full	Front	Rear
			125	150

Test Conditions – Compliance requires at least 1 stop within the limits listed below (Selected compliance run is underlined):

Test speed	48.3 km/h (30 mph)	96.6 km/h (60 mph)
Initial Brake Temperature (IBT) between:	54°C (130°F) and 66°C (150°F)	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	6	6
Maximum Stop Distance Allowed	16.5 m (54 ft)	65.8 m (216 ft)
Minimum Braking Ratio (BR)	0.56	0.56
Maximum Allowable Brake Actuation Forces	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)

48.3 km/h Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N) ³	Max Rear Force (N) ⁴	BR ⁵	IBT °C		
						Fr ⁶	Rr ⁷	
1	47.6	12.4	130	95	0.72	54	53	
2	<u>48.8</u>	11.9	<u>132</u>	<u>147</u>	<u>0.78</u>	<u>55</u>	<u>59</u>	
3	49.9	13.7	105	107	0.71	54	55	
4	47.6	11.9	103	95	0.75	54	54	
5	49.1	12.9	102	86	0.73	53	55	
6	47.3	11.5	98	120	0.77	54	59	

³Maximum Front Brake Actuation Force (Newtons).

⁴Maximum Rear Brake Actuation Force (Newtons).

⁵Braking Ratio – deceleration rate divided by gravitational constant.

⁶Front Initial Brake Temperature (°C).

⁷Rear Initial Brake Temperature(°C).

5. Data Sheet No. 4 First Preburnish Effectiveness Test – Service Brake Sys...Continued

96.6 km/h Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	95.0	49.9	109	99	0.71	58	59	
2	94.6	47.7	108	102	0.74	59	60	
3	97.9	46.4	100	132	0.81	63	63	
4	94.6	43.0	112	111	0.82	61	60	
5	<u>95.4</u>	<u>45.2</u>	<u>109</u>	<u>87</u>	<u>0.79</u>	<u>53</u>	<u>56</u>	
6	97.4	46.9	115	74	0.80	58	62	

5. Data Sheet No. 5 Preburnish Partial Service Brake System Effectiveness Test (S7.3.2)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
12/15/02	C21200	T. Carter	11.4	29.3
Ambient Temperature	Wind Velocity/Direction:		Tire Pressure (cold) - kPa	
10.6°C	11 km/h from Southwest	>3/4	Front	Rear
			125	150

Test Conditions – For a motorcycle with two independently actuated service brake systems, test each service brake system individually. Compliance requires at least 1 stop within the limits listed below (Selected compliance run is underlined):

Test speed	48.3 km/h (30 mph)	96.6 km/h (60 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	6	6
Maximum Stop Distance Allowed	36.9m (121 ft)	147.5m (484 ft)
Minimum Braking Ratio (BR)	0.25	0.25
Max Allowable Brake Actuation Forces	Hand lever force ≤45 N (55 lb)	Hand lever force ≤45 N (55 lb)
Brake System & Operator Input Control	Partial Service Brake System #1 – Right Hand Lever	

Test speed	48.3 km/h (30 mph)	96.6 km/h (60 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	6	6
Maximum Stop Distance Allowed	36.9m (121 ft)	147.5m (484 ft)
Minimum Braking Ratio (BR)	0.25	0.25
Max Allowable Brake Actuation Forces	Foot pedal force ≤400 N (90 lb)	Foot pedal force ≤400 N (90 lb)
Brake System & Operator Input Control	Partial Service Brake System #2 – Right Foot Pedal	

48.3 km/h Data: **Brake System 1 – Right hand lever operated front brake system**

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C			
						Frt	Rrt		
1	48.8	13.5	109	N/A	0.69	61	N/A		
2	<u>48.0</u>	13.9	<u>127</u>	<u>N/A</u>	<u>0.65</u>	<u>57</u>	<u>N/A</u>		
3	49.1	14.0	147	N/A	0.68	55	N/A		
4	48.5	14.4	117	N/A	0.64	58	N/A		
5	48.8	13.9	140	N/A	0.67	55	N/A		
6	49.4	14.8	128	N/A	0.65	59	N/A		

5. Data Sheet No. 5 Preburnish Partial Service Brake System Effectiveness...Continued

48.3 km/h Data:

Brake System 2 – Right foot pedal operated rear brake system

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	50.4	26.7	N/A	201	0.37	N/A	55	
2	47.8	27.2	N/A	154	0.33	N/A	56	
3	48.1	26.7	N/A	162	0.34	N/A	60	
4	47.4	23.8	N/A	179	0.37	N/A	57	
5	47.6	28.1	N/A	159	0.32	N/A	60	
6	47.4	24.5	N/A	181	0.36	N/A	63	

96.6 km/h Data:

Brake System 1 – Right hand lever operated front brake system

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	95.3	52.3	96	N/A	0.68	56	N/A	
2	93.3	48.9	102	N/A	0.70	58	N/A	
3	94.6	47.4	122	N/A	0.74	60	N/A	
4	94.3	49.8	108	N/A	0.70	56	N/A	
5	94.3	47.0	142	N/A	0.74	62	N/A	
6	95.4	48.4	115	N/A	0.74	56	N/A	

96.6 km/h Data:

Brake System 2 – Right foot pedal operated rear brake system

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	95.1	84.3	N/A	175	0.42	N/A	64	
2	96.4	92.8	N/A	166	0.39	N/A	62	
3	95.7	92.6	N/A	165	0.39	N/A	61	
4	96.7	85.1	N/A	180	0.43	N/A	62	
5	95.7	86.0	N/A	189	0.42	N/A	62	
6	95.5	84.2	N/A	176	0.43	N/A	61	

5. Data Sheet No. 6 First Burnish Procedure (S7.4)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
12/15/02	C21200	T. Carter	29.3	76.1
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
12.2°C	N/A	N/A	Front	Rear
			125	150

Test Conditions:

Test speed	48.3 km/h (30 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	200
Deceleration Rate	3.7 m/s ² (12 ft/s ²) - The equivalent braking ratio is 0.377
Actuation Forces	Hand lever and foot pedal force limits do not apply during this procedure
Cooling Speed	Accelerate at maximum rate to 48.3 km/h immediately and maintain that speed until making the next stop.
Stop Interval	The braking interval shall be either the distance necessary to cool brakes to the IBT or one mile, whichever comes first.
Post Burnish Adjustments	After burnishing adjust the brakes in accordance with the manufacturer's recommendation.

Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	48.8	24.5	44	113	0.38	62	64	
25	48.8	25.3	49	125	0.37	63	59	
50	48.4	25.4	34	76	0.36	60	58	
75	48.4	24.4	37	90	0.38	57	59	
100	48.4	25.6	42	105	0.36	57	60	
125	48.4	23.7	50	83	0.39	62	63	
150	48.7	25.3	46	100	0.37	62	65	
175	49.0	25.5	40	95	0.37	60	60	
200	49.1	25.6	33	96	0.37	57	61	

5. Data Sheet No. 7 Second Effectiveness Test – Service Brake System (S7.5)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
12/16/02	C21200	T. Carter	76.1	92.3
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
11.7°C	13 km/h from Southwest	Full	Front	Rear
			125	150

Test Conditions – Compliance requires at least 1 stop within the limits listed below (Selected compliance run is underlined):

Test speed	48.3 km/h (30 mph)	96.6 km/h (60 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	6	6
Maximum Stop Distance Allowed	13.1 m (43 ft)	56.4 m (185 ft)
Minimum Braking Ratio (BR)	0.70	0.65
Maximum Allowable Brake Actuation Forces	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)

Test speed	128.7 km/h (80 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	4
Maximum Stop Distance Allowed	105.2 m (345 ft)
Minimum Braking Ratio (BR)	0.62
Maximum Allowable Brake Actuation Forces	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)

48.3 km/h Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	47.1	11.7	103	149	0.74	56	58	
2	49.7	14.0	108	107	0.70	58	59	
3	48.5	11.5	177	91	0.80	57	58	
4	48.5	11.9	137	72	0.78	56	62	
5	48.4	11.7	173	91	0.79	59	60	
6	49.2	12.7	152	64	0.75	58	61	

5. Data Sheet No. 7 Second Effectiveness Test – Service Brake System...Continued

96.6 km/h Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	95.1	44.7	127	90	0.80	58	59	
2	93.2	42.1	192	105	0.81	60	62	
3	95.0	44.1	169	81	0.81	58	63	
4	95.5	42.4	148	69	0.85	57	62	
5	94.7	45.4	133	86	0.78	56	61	
6	97.6	47.2	104	78	0.79	58	62	

128.7 km/h Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	122.0	77.0	77	96	0.76	59	62	
2	129.3	79.9	105	111	0.82	59	58	
3	127.9	81.6	109	89	0.79	58	57	
4	127.7	74.5	172	93	0.86	57	56	

5. Data Sheet No. 8 Fade and Recovery Test – Service Brake System (S7.6)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
12/16/02	C21200	T. Carter	92.3	105.3
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
15°C	9 km/h from Southwest	>3/4	Front	Rear
			125	150

This test consists of 3 sections: Baseline Check Stops (S7.6.1), Fade Stops (S7.6.2) and Recovery Stops (S7.6.3). The purpose of the Baseline Check Stops section is to determine the allowable brake actuation force limits for the fifth recovery stop. The Baseline Check Stops are performed first. Compliance requires that the fifth recovery stop brake actuation forces are within the computed limits.

Test Conditions – Baseline Check Stops:

Test speed	48.3 km/h (30 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	3
Deceleration Rate	3.04 to 3.33 m/s ² (10 to 11 ft/s ²) – The equivalent braking ratio is 0.31 to 0.34.
Maximum Allowable Brake Actuation Forces	Hand lever force ≤ 245 N (55 lb) Foot pedal force ≤ 400 N (90 lb)

48.3 km/h Baseline Check Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Ft	Rr	
1	48.8	29.2	31	90	0.32	54	53	
2	49.9	29.3	26	84	0.33	54	57	
3	49.2	28.8	30	82	0.33	58	55	
Average Max Actuation Force (to be used in computing 5 th recovery stop actuation force limits)			29	85.3				

5. Data Sheet No. 8 Fade and Recovery Test – Service Brake System...Continued

Test Conditions – Fade Stops:

Test speed	96.6 km/h (60 mph)
First Stop – Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)
IBT – Subsequent Stops	IBT prior to brake applications for subsequent stops shall be those occurring at the distance intervals
Number of Stops Performed	10 – Accelerate as rapidly as possible to the test speed immediately after each stop. Maintain test speed until the next brake application.
Minimum Braking Ratio (BR)	0.47
Stop Interval	644 m (2112 ft)
Maximum Allowable Brake Actuation Forces	Hand lever force ≤ 245 N (55 lb) Foot pedal force ≤ 400 N (90 lb)
Post-Fade Test Procedure	After the 10 th fade stop, drive 1.6 km (1 mile) at 48.3 km/h (30 mph) and immediately conduct the recovery test.

Data - Fade Stops:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	97.1	73.7	45	93	0.50	56	57	
2	97.8	74.1	46	103	0.51	142	89	
3	95.0	71.0	36	119	0.50	208	96	
4	95.4	73.1	47	89	0.49	218	109	
5	95.0	72.5	46	82	0.49	241	110	
6	96.0	70.9	58	81	0.51	244	109	
7	93.6	70.7	55	96	0.49	253	109	
8	96.1	70.1	43	90	0.52	240	109	
9	93.4	69.9	55	88	0.49	240	118	
10	97.1	71.3	43	78	0.52	236	123	

5. Data Sheet No. 8 Fade and Recovery Test – Service Brake System...Continued

Test Conditions – Recovery Stops:

Test speed	48.3 km/h (30 mph)
First Stop – Initial Brake Temperature (IBT) between	Temperature achieved at completion of fade stop procedure.
IBT Subsequent Stops	IBT prior to brake applications for subsequent stops shall be those occurring at the distance intervals.
Number of Stops Performed	5 Accelerate as rapidly as possible to the test speed immediately after each stop. Maintain test speed until the next brake application.
Deceleration Rate	3.04 to 3.33 m/s ² (10 to 11 ft/s ²) – The equivalent braking ratio is 0.31 to 0.34.
Stop Interval	≤ 1.6 km (1 mile)
Maximum Allowable Brake Actuation Forces – Stops 1 through 4	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)
Maximum Allowable Brake Actuation Forces – Stop 5	See 5 th Recovery Stop Actuation Force Limit Computation Table below.

5th Recovery Stop Actuation Force Limit Computations (§5.4.3)

Service Brake 1 (Front Brake)		Service Brake 2 (Rear Brake)	
Lower Limit – Average Max Force (29 N) minus 44.5 N	Upper Limit – Average Max Force (29 N) plus 89 N	Lower Limit – Average Max Force (85.3 N) minus 44.5 N	Upper Limit – Average Max Force (85.3 N) plus 89 N
0	118 N	40.8 N	174.3 N

48.3 km/h Recovery Stop Data (Selected compliance run is underlined):

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C	
						Frt	Rr
1	48.4	28.6	34	80	0.32	236	129
2	48.4	28.4	34	88	0.32	80	72
3	49.2	28.8	33	86	0.33	63	57
4	48.1	27.8	31	85	0.33	57	55
5	<u>48.4</u>	<u>28.5</u>	<u>31</u>	<u>83</u>	<u>0.32</u>	<u>55</u>	<u>53</u>

5. Data Sheet No. 9 Second Burnish Procedure (S7.7)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
12/16/02	C21200	T. Carter	105.3	118.4
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
16.7°C	13 km/h from Southwest	>3/4	Front	Rear
			125	150

Test Conditions:

Test speed	48.3 km/h (30 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	35
Deceleration Rate	3.7 m/s ² (12 ft/s ²) - The equivalent braking ratio is 0.377
Actuation Forces	Hand lever and foot pedal force limits do not apply during this procedure
Cooling Speed	Accelerate immediately at maximum rate to 48.3 km/h and maintain that speed until making the next stop.
Stop Interval	The braking interval shall be either the distance necessary to cool brakes to the IBT or one mile, whichever comes first.
Post Burnish Adjustments	The brakes may be adjusted in accordance with the manufacturer's recommendation if no tools are required for the procedure.

Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C	
						Frt	Rr
1	48.1	24.8	34	111	0.37	61	63
2	48.3	25.6	36	87	0.36	58	60
3	48.7	24.3	42	92	0.38	62	57

5. Data Sheet No. 10 Final Effectiveness Test – Service Brake System (S7.8.1)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
12/16/02	C21200	T. Carter	118.4	131.1
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
			Front	Rear
16.7°C	11 km/h from Southwest	>3/4	125	150

Test Conditions – Compliance requires at least 1 stop within the limits listed below (Selected compliance run is underlined):

Test speed	48.3 km/h (30 mph)	96.6 km/h (60 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	6	6
Maximum Stop Distance Allowed	13.1 m (43 ft)	56.4 m (185 ft)
Minimum Braking Ratio (BR)	0.70	0.65
Maximum Allowable Brake Actuation Forces	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)

Test speed	128.7 km/h (80 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	4
Maximum Stop Distance Allowed	105.2 m (345 ft)
Minimum Braking Ratio (BR)	0.62
Maximum Allowable Brake Actuation Forces	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)

48.3 km/h Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frt	Rr	
1	48.1	13.2	94	57	0.69	56	58	
2	49.0	11.7	175	51	0.81	55	58	
3	<u>48.1</u>	<u>12.2</u>	<u>234</u>	<u>76</u>	<u>0.75</u>	<u>55</u>	<u>57</u>	
4	49.2	12.4	128	56	0.77	56	57	
5	49.4	12.9	118	21	0.75	56	55	
6	<u>48.1</u>	<u>12.4</u>	<u>106</u>	<u>101</u>	<u>0.73</u>	<u>58</u>	<u>59</u>	

5. Data Sheet No. 10 Final Effectiveness Test – Service Brake System...Continued

96.6 km/h Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C			
						Frt	Rr		
1	92.9	44.2	106	86	0.77	56	56		
2	95.0	43.0	99	96	0.82	57	61		
3	<u>96.2</u>	<u>48.5</u>	<u>97</u>	<u>71</u>	<u>0.75</u>	<u>58</u>	<u>63</u>		
4	95.5	43.6	112	91	0.82	59	63		
5	93.2	43.0	105	95	0.79	55	61		
6	95.3	43.1	105	92	0.83	58	61		

128.7 km/h Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C			
						Frt	Rr		
1	<u>127.9</u>	<u>82.8</u>	<u>95</u>	<u>69</u>	<u>0.78</u>	<u>57</u>	<u>55</u>		
2	117.4	71.1	180	61	0.76	55	57		
3	126.7	79.5	80	88	0.79	55	62		
4	<u>127.7</u>	<u>84.7</u>	<u>97</u>	<u>70</u>	<u>0.76</u>	<u>66</u>	<u>64</u>		

5. Data Sheet No. II Partial Service Brake System – Split Service Brake Systems (S7.8.2)

Date:	Vehicle:	Test Rider:	Odometer Reading - mi	
			Start:	Finish:
N/A	N/A	N/A	N/A	N/A
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
			Front	Rear
N/A	N/A	N/A	N/A	N/A

Test Conditions – Alter the service brake system on three-wheeled motorcycles to induce a complete loss of braking in any one subsystem. Determine line pressure or pedal/lever force required to cause operation of the brake system failure indicator. Utilize the brake system not disabled and repeat procedure with each brake subsystem. Compliance requires at least 1 stop within the limits listed below (Selected compliance run is underlined):

Test speed	48.3 km/h (30 mph)	96.6 km/h (60 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	6	6
Maximum Stop Distance Allowed	29.6m(97 ft)	118.3m(388 ft)
Minimum Braking Ratio (BR)	0.31	0.31
Max Allowable Brake Actuation Forces	Hand lever force ≤ 245 N (55 lb) Foot pedal force ≤ 400 N (90 lb)	

48.3 km/h Data: Brake System 1

Run No.	Speed (km/h)	Dist (m)	Brake pedal/lever force required to cause brake failure/indicator to operate (N)		DR	IBT °C	
			Max Front Force (N)	Max Rear Force (N)		Fr	Rr
1							
2							
3							
4							
5							
6							

5. Data Sheet No. 11 Partial Service Brake System–Split Service Brake System...Cont'd

96.6 km/h Data:

Brake System 1

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C	
						Frt	Rr
1							
2							
3							1
4							
5							
6							

48.3 km/h Data:

Brake System 2

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C	
						Frt	Rr
1							
2							
3							
4							
5							
6							

96.6 km/h Data:

Brake System 2

Brake pedal/lever force required to cause brake failure/indicator to operate (N).						IBT °C	
Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	Frt	Rr
1							
2							
3							
4							
5							
6							

5. Data Sheet No. 12 Parking Brake Test (S7.9)

Date:	Vehicle:	Test Rider/Technician:	Odometer Reading -	
			Start:	Finish:
N/A	N/A	N/A	N/A	N/A
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) -	
N/A	N/A	N/A	Front	Rear
			N/A	N/A

Test Conditions:

Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)	
Gradient	30%	
Stops Performed	Downhill direction - 1	Uphill direction - 1
Duration of each test	5 minutes	
Procedure	<p>Drive the motorcycle downhill on the grade with the longitudinal axis of the motorcycle aligned with the direction of the slope of the grade. Apply the service brakes with a force not exceeding 400 N (90 lb) to stop the motorcycle and place the transmission in neutral.</p> <p>Apply the parking brake with a force not exceeding 400 N (90 lb) for a foot operated system, or 245 N (55 lb) for a hand operated system. Release the service brake and allow the motorcycle to remain at rest (to the limit of traction of the braked wheels) for test duration.</p> <p>Following observation of the vehicle in a stationary condition for the specified time in the downhill direction, repeat the same test procedure with the motorcycle oriented in the uphill direction on the same grade.</p>	

Compliance requires the motorcycle to remain stationary (to the limits of traction) for 5 minutes in both the uphill and downhill directions.

Data:

Run No.	Pass?	Direction	Actuation Force (N)
1	N/A	Uphill	N/A
2	N/A	Downhill	N/A

5. Data Sheet No. 13 Water Recovery Test – Service Brake System (S7.10)

Date:	Vehicle:	Test Rider:	Odometer Reading-miles	
			Start:	Finish:
12/16/02	C21200	T. Carter	131.1	133.2
Ambient Temperature	Wind Velocity/Direction:	Fuel Level:	Tire Pressure (cold) - kPa	
13.9°C	7.4 km/h from South	>3/4	Front	Rear
			125	150

This test consists of 2 sections: Baseline Check Stops (S7.10.1) and Wet Brake Recovery Stops (S7.10.2). The purpose of the Baseline Check Stops section is to determine the allowable brake actuation force limits for the fifth wet brake recovery stop. The Baseline Check Stops are performed first. Compliance requires that the fifth recovery stop brake actuation forces are within the computed limits.

Test Conditions – Baseline Check Stops:

Test speed	48.3 km/h (30 mph)
Initial Brake Temperature (IBT) between	54°C (130°F) and 66°C (150°F)
Number of Stops Performed	3
Deceleration Rate	3.04 to 3.33 m/s ² (10 to 11 ft/s ²) – The equivalent braking ratio is 0.31 to 0.34.
Maximum Allowable Brake Actuation Forces	Hand lever force ≤ 245 N (55 lb) Foot pedal force ≤ 400 N (90 lb)

48.3 km/h Baseline Check Data:

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C	
						Fr	Rr
1	48.5	29.7	27	92	0.31	61	59
2	49.0	29.1	37	78	0.33	61	63
3	48.3	29.3	25	89	0.31	62	64
Average Max Actuation Force (to be used in computing 5 th recovery stop actuation force limits)			29.7	86.3			

5. Data Sheet No. 13 Wet Recovery Test – Service Brake System...Continued

Test Conditions – Wet Brake Recovery Stops:

Pre-Tes: Wetting Procedure	Immerse rear brake in water fully released for 2 minutes followed by immersion of the front brake in water fully released for 2 minutes. The entire wetting procedure shall be completed in 7 minutes or less.
Test	Immediately after completion of wetting, accelerate at a maximum rate to the initial test speed without applying the brakes. Upon reaching the initial test speed, immediately conduct the wet brake recovery stops.
Test speed	48.3 km/h (30 mph)
First Stop – Initial Brake Temperature (IBT) between	Temperature achieved at completion of brake wetting
IBT – Subsequent Stops	IBT prior to brake applications for subsequent stops shall be those occurring at the end of each stop.
Number of Stops Performed	5 – Immediately after each stop accelerate as rapidly as possible to the test speed and make the next stop.
Deceleration Rate	3.04 to 3.33 m/s ² (10 to 11 ft/s ²) – The equivalent braking ratio is 0.31 to 0.34.
Stop Interval	Distance sufficient to accelerate to initial test speed
Maximum Allowable Brake Actuation Forces Stops 1 through 4	Hand lever force ≤245 N (55 lb) Foot pedal force ≤400 N (90 lb)
Maximum Allowable Brake Actuation Forces Stop 5	See 5 th Recovery Stop Actuation Force Limit Computation Table below.

5th Recovery Stop Actuation Force Limit Computations (S5.4.3)

Service Brake 1 (Front Brake)		Service Brake 2 (Rear Brake)	
Lower Limit – Average Max Force (29.7 N) minus 44.5 N	Upper Limit – Average Max Force (29.7 N) plus 89 N	Lower Limit – Average Max Force (86.3 N) minus 44.5 N	Upper Limit – Average Max Force (86.3 N) plus 89 N
0	118.7 N	41.8 N	175.3 N

48.3 km/h Recovery Stop Data (Selected compliance run is underlined):

Run No.	Speed (km/h)	Dist (m)	Max Front Force (N)	Max Rear Force (N)	BR	IBT °C		
						Frl	Rr	
1	49.8	29.7	42	79	0.33	12	13	
2	47.8	29.1	40	69	0.31	36	25	
3	49.0	29.6	47	78	0.32	36	24	
4	49.7	29.2	30	85	0.33	47	25	
5	<u>49.0</u>	<u>29.0</u>	<u>33</u>	<u>95</u>	<u>0.33</u>	<u>48</u>	<u>30</u>	

5. Data Sheet No. 14 Final Inspection (S7.11)

Date:	Vehicle:	Odometer Reading - miles
12/25/02	C21200	133.2

Inspection Requirements:

Disassemble all brakes and inspect for:	Pass?
Detachment or fracture of any component in the entire brake system.	Yes
Detachment of brake linings from any shoe or pad.	Yes
Fluid or lubricant leakage from wheel cylinder(s), master cylinder(s), axle seals, and any other component in the entire brake system.	Yes

APPENDIX I Instrumentation List

Listed below are the test instruments used for this program.

1. Motorcycle Third Wheel

- Custom Built by Carter Engineering.
- Tire Circumference: 4.462 feet $\pm 0.227\%$ (Original Calibration)
- Tire circumference divided into 500 pulses with BEI Optical Encoder.
- Calibration verified on 8/29/02

2. Brake Pedal and Lever Force Transducers

- Strain gages - Micro-Measurements
- Type CEA-13-062UW-350
- Calibration on 12/12/02

3. Friction Material Thermocouples

- Iron-Constantan Thermocouples, Type "K" - Omega
- Plug Type as per drawings (Reference 1, 2 & 3)
- Calibration on 12/12/02

4. Weather Station

- Tullahoma Airport Weather Information Data

5. Continuous Data Recorders

- Kaye Instruments, Inc.
- DataFielder 200 Series
- Model No. DF-200
- Serial No.: 0569

- Omnidata International, Inc.
- Polycorder 700 Series
- Model No. PC-704
- Serial No.: 0180

6. Multiplexer

- 80 Channel
- Omnidata International, Inc.
- Model No. PA-780-80
- Serial No. PA7-131

7. Portable Computers


- Toshiba Model T3400CT
- Subnotebook Computer: 486-33 MHz, 8 megabyte RAM, 120 megabyte Hard Drive, Color Display.
- Dell Model Inspiron 3500
- Laptop Computer: Pentium II-300 MHz, 128 megabyte RAM, 6.4 gigabyte hard drive, Color Display.

8. Certified Weights for Strain Gage Calibration


- Rite-Weights, Inc.
- NIST Traceable Certificate No. 6143
- Serial No. E854 & E855 - 2 lb.
- Serial No. E856 thru E859 - 5 lb.
- Serial No. E860 thru E862 - 25 lb.
- Serial No. E863 - 50 lb.

9. Portable Scales

- Intercomp Speed Weigh II Electronic Scales
- Serial No. SN8468
- Calibration on 4/7/02

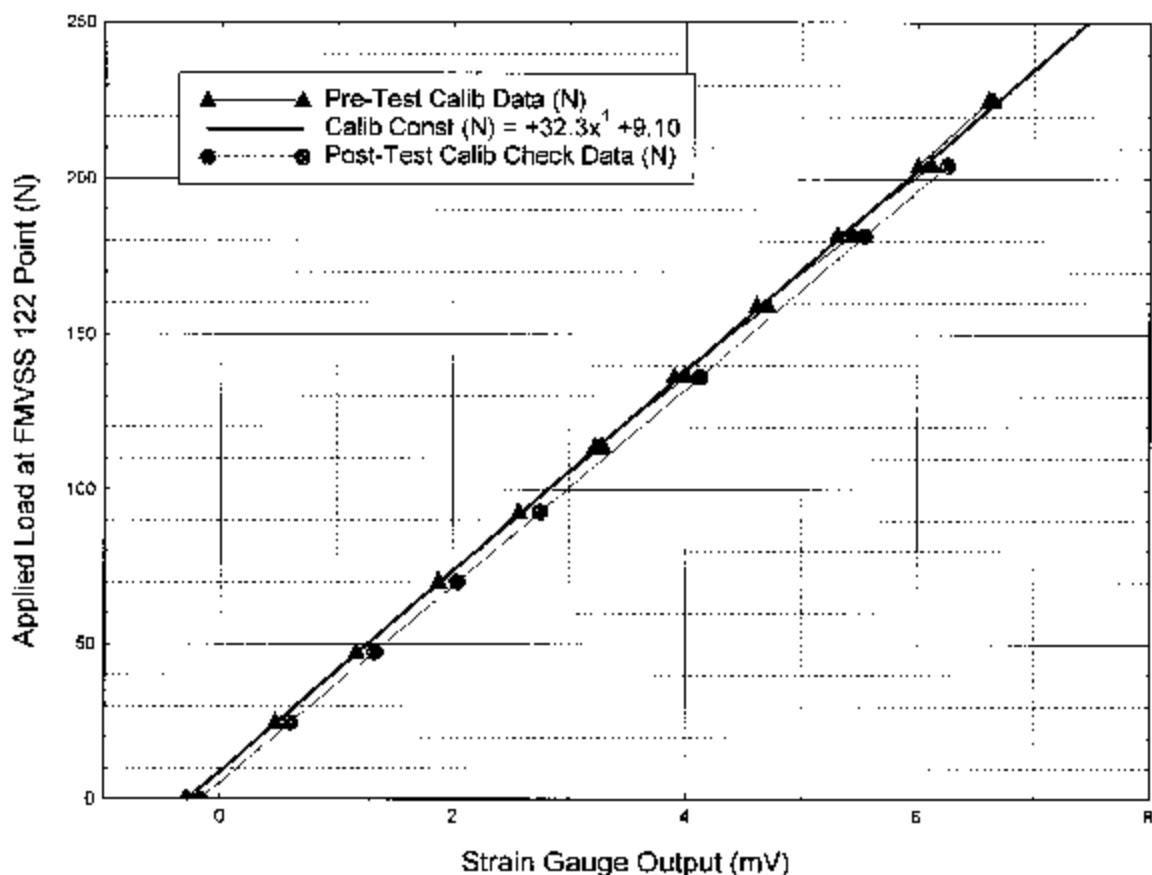Suzuki DRZ400 Front Brake Lever Strain Gauge Calibration - 12/12/02

Suzuki DRZ400 Rear Brake Pedal Strain Gauge Calibration - 12/12/02

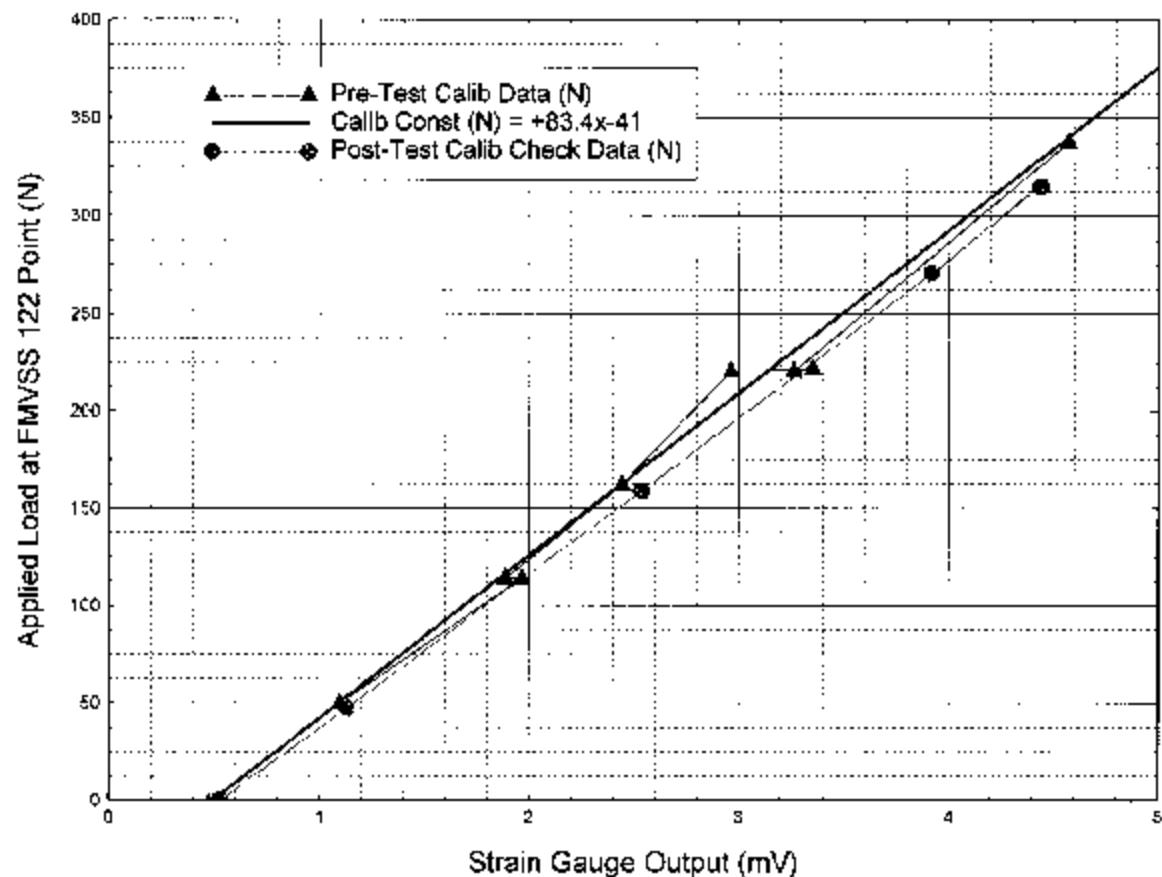

APPENDIX 3 Calculation of Master Cylinder Reservoir Volumes

Using the following equation for disk brakes:

$$V = N_c [N_p (\Delta t_i + C_i + \Delta t_o + C_o) \times \frac{\pi}{4} \times D^2] \quad (1)$$

Where:

V = Volume required per braking system.

N_c = Number of calipers per braking system.

N_p = Number of pistons or piston pairs per caliper.

D = Caliper piston diameter.

C = Average clearance between brake pads and rotor.

t = Average change of brake pad & rotor thickness from new condition to fully worn.

i = Inboard.

o = Outboard.

The volume requirement for the independent front brake system of the test motorcycle was calculated as shown below:

Front Brake System - $N_c = 1$

$N_p = 2$

$D = 2.6 \text{ cm}$

$C = 0.0076 \text{ cm (typical)}$

$t = 0.285 \text{ cm}$ (Wear limit = 2.75mm (to bottom of slot); Rotor wear limit = 0.2 mm (total). Average total thickness change per side = 2.85 mm $\rightarrow 0.285 \text{ cm}$)

$$V = 2 \times \left[(2.6)^2 \times \frac{\pi}{4} \times (0.285 + 0.0076 + 0.285 - 0.0076) \right]$$

$$V = 6.2 \text{ cm}^3$$

Minimum volume required: $1.5 \times 6.2 \text{ cm}^3 = 9.3 \text{ cm}^3$

Measured volume of existing front brake system master cylinder reservoir $\approx 15+ \text{ cm}^3$.

Fluid volume measured at the level that will allow installation of bellows and reservoir cover without expulsion of fluid.

The volume requirement for the independent rear brake system of the test motorcycle was calculated as shown below:

Front Brake System - $N_c = 1$

$N_p = 1$

$D = 2.6 \text{ cm}$

$C = 0.0076 \text{ cm} (\text{typical})$

$t = 0.565 \text{ cm}$ (Wear limit = 5.4 mm (to bottom of slot); Rotor wear limit = 0.5 mm (total). Average total thickness change per side = 5.65 mm $\rightarrow 0.565 \text{ cm}$)

$$V = \left[(2.6)^2 \times \frac{\pi}{4} \times (0.565 + 0.0076 + 0.565 + 0.0076) \right]$$

$$V = 6.1 \text{ cm}^3$$


Minimum volume required: $1.5 \times 6.1 \text{ cm}^3 = 9.15 \text{ cm}^3$

Measured volume of existing rear brake system master cylinder reservoir $\cong 12 \text{ cm}^3$.

Fluid volume measured at the "upper" mark on the reservoir.

APPENDIX 4


Photographs

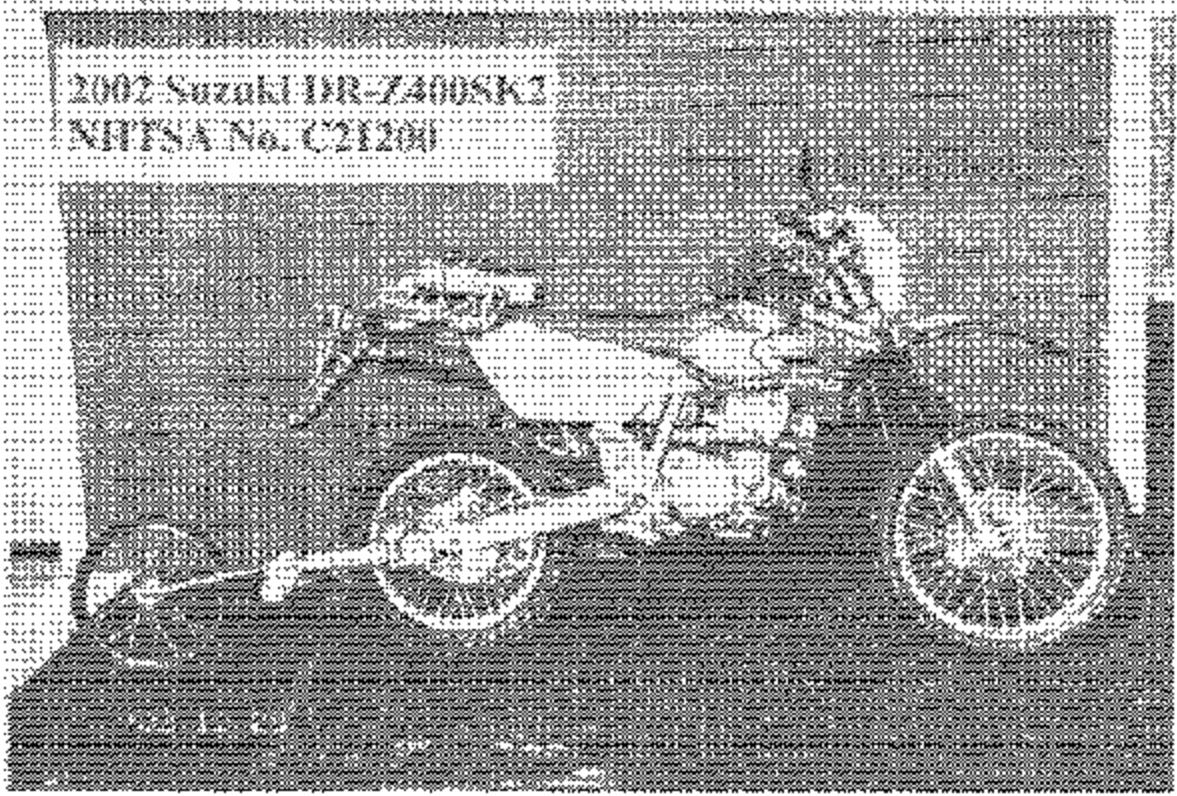

Photograph 1. Front view of the test motorcycle shown from a camera angle in profile.




Photograph 2. Left Side View of the Test Motorcycle with instrumentation installed.

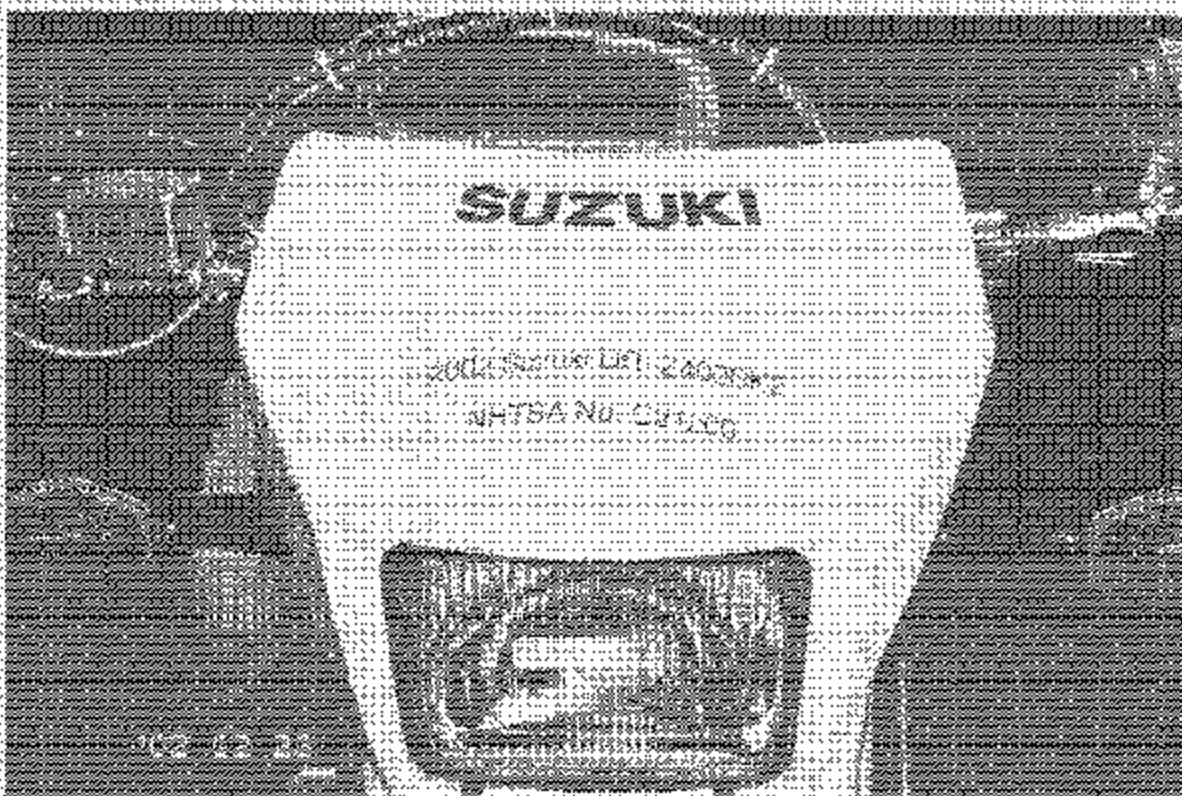


Photograph 3. Test Motorcycle NHTSA Number.



Photograph 4. Test Motorcycle Vehicle Certification Label - Front of Chassis.

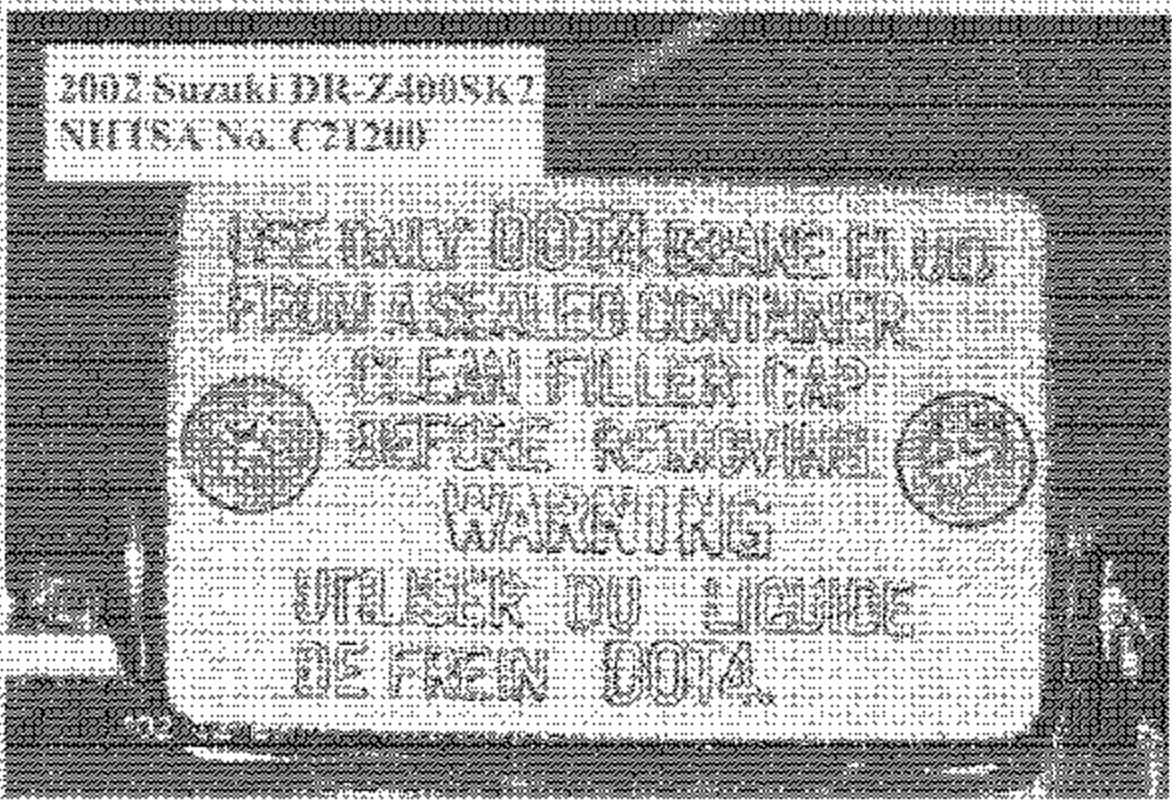


Photograph 5. Test Motorcycle Front Brake System Master Cylinder Reservoir Cover.

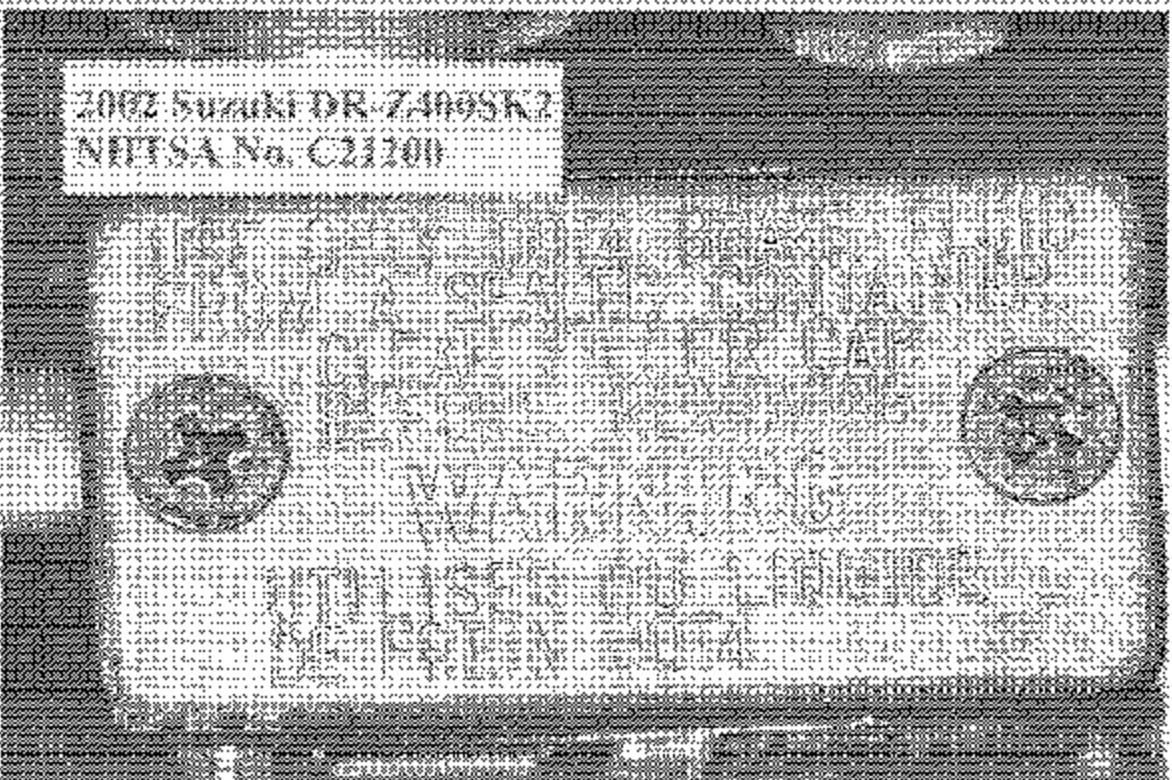


Photograph 6. Test Motorcycle Rear Brake System Master Cylinder Reservoir Cover.

2002 Suzuki DR-Z400S/K2
NHTSA No. C21200

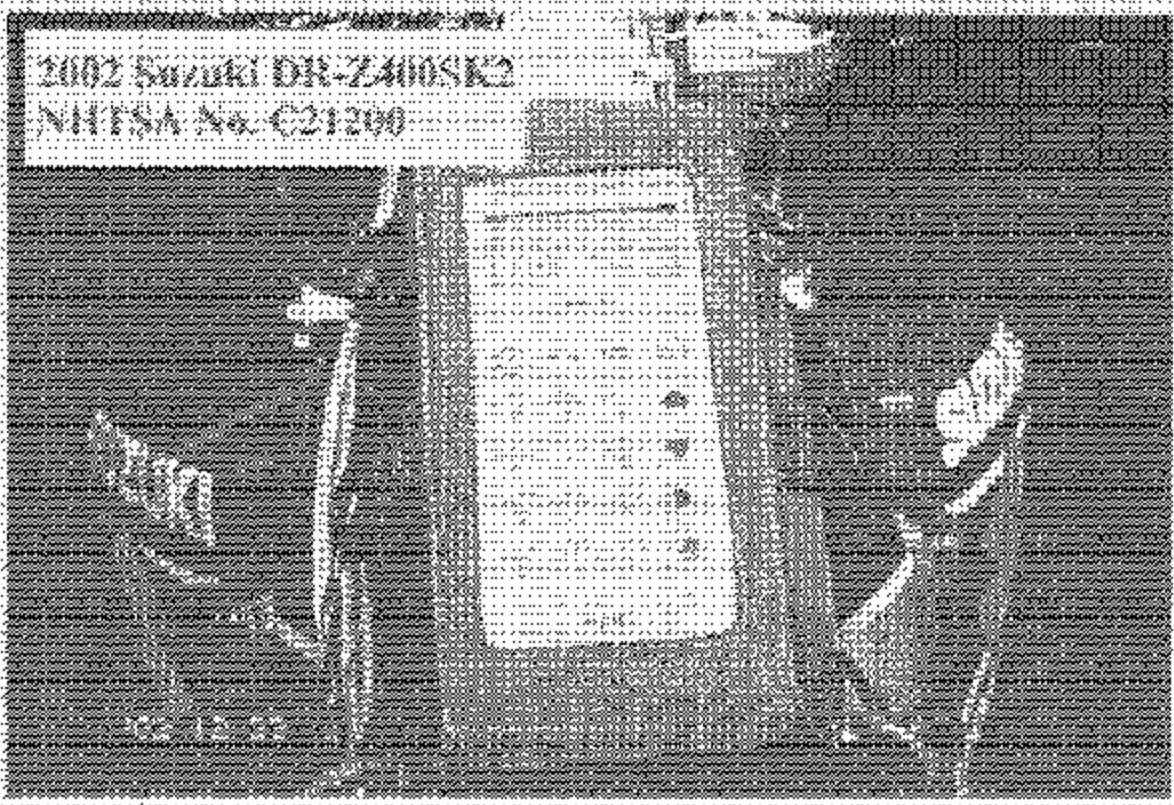


PHOTOGRAPH 7. MULTIPLEXER ATTACHED TO REAR OF MOTORCYCLE SEAT.


2002 Suzuki DR-Z400S/K2
NHTSA No. C21200

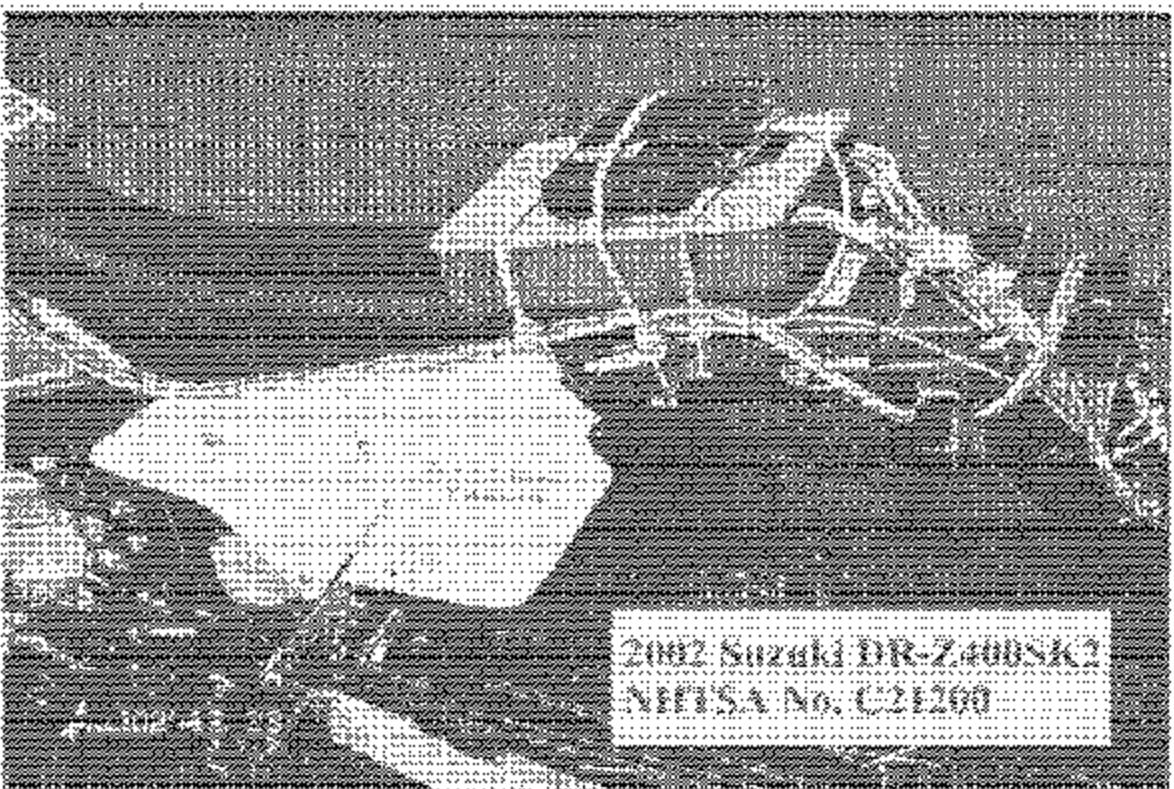


Photograph 8. Multiplexer - Attached to Rear of Motorcycle Seat.

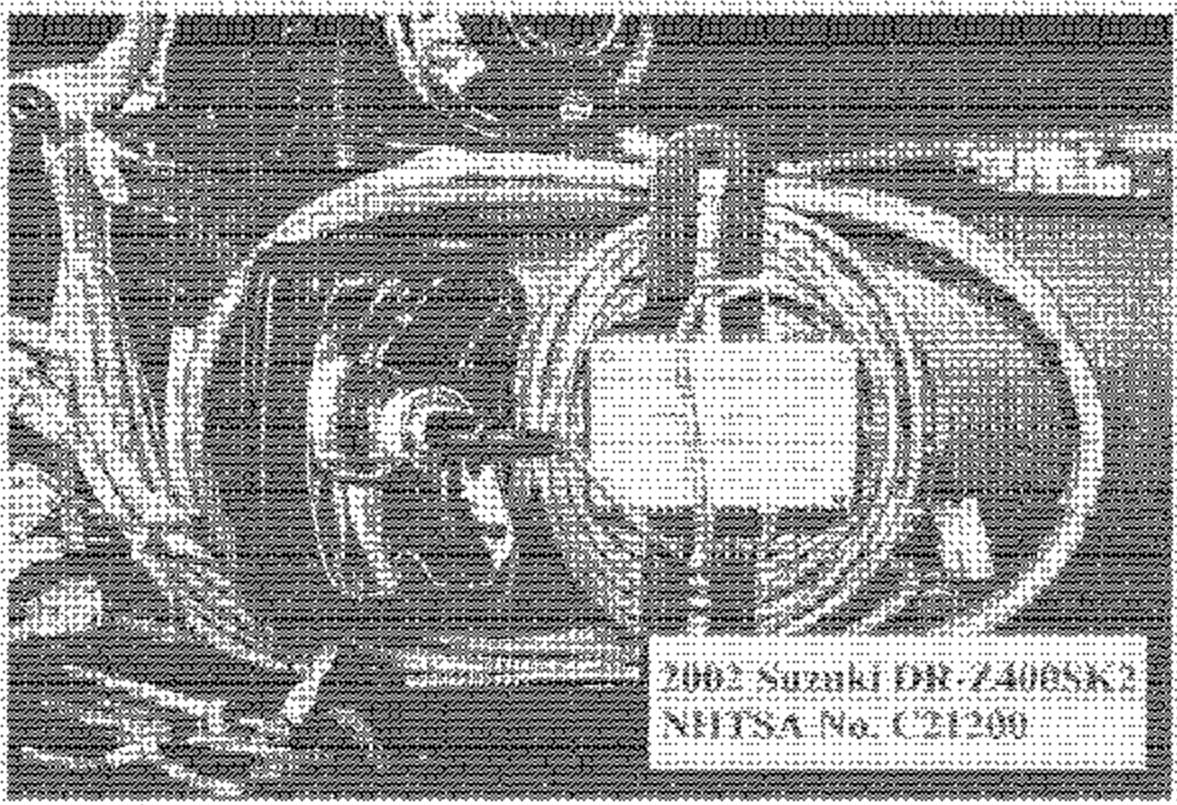


Photograph 9: Brake Application lever and tachometer.

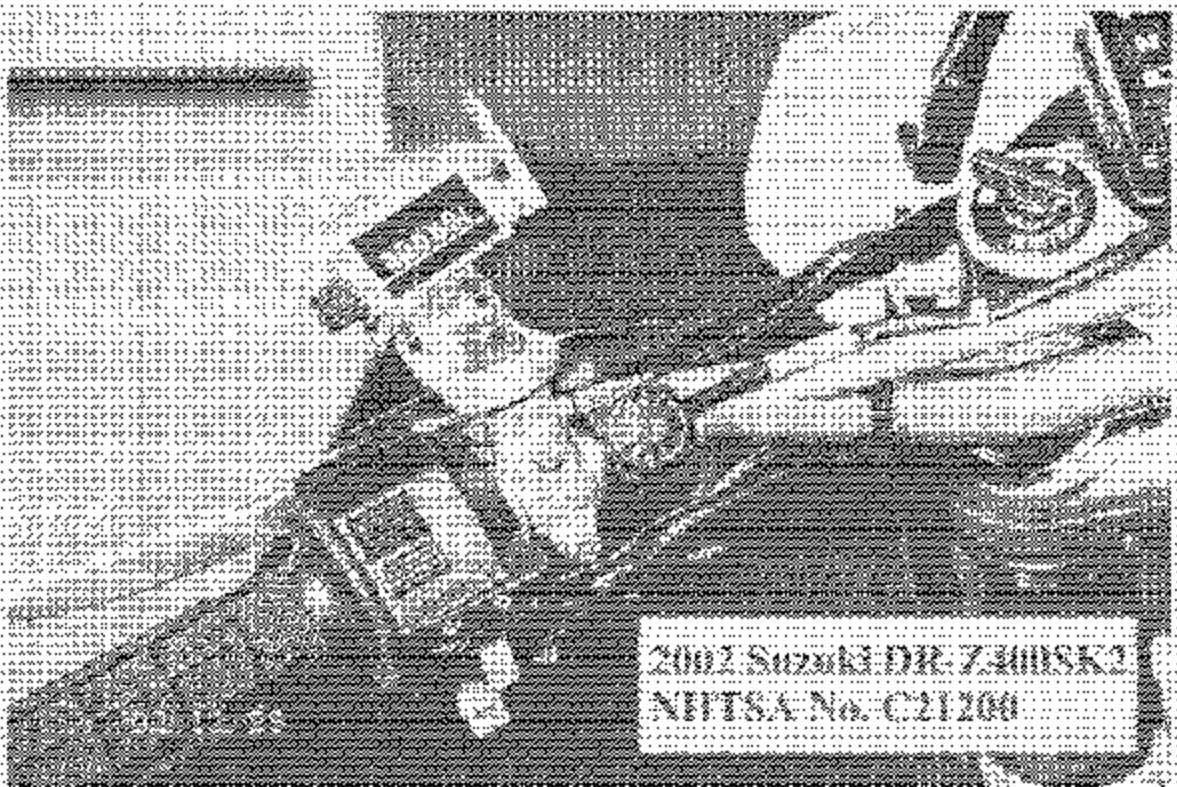


Photograph 10: Data Recorder Start button and Mechanical Counter.

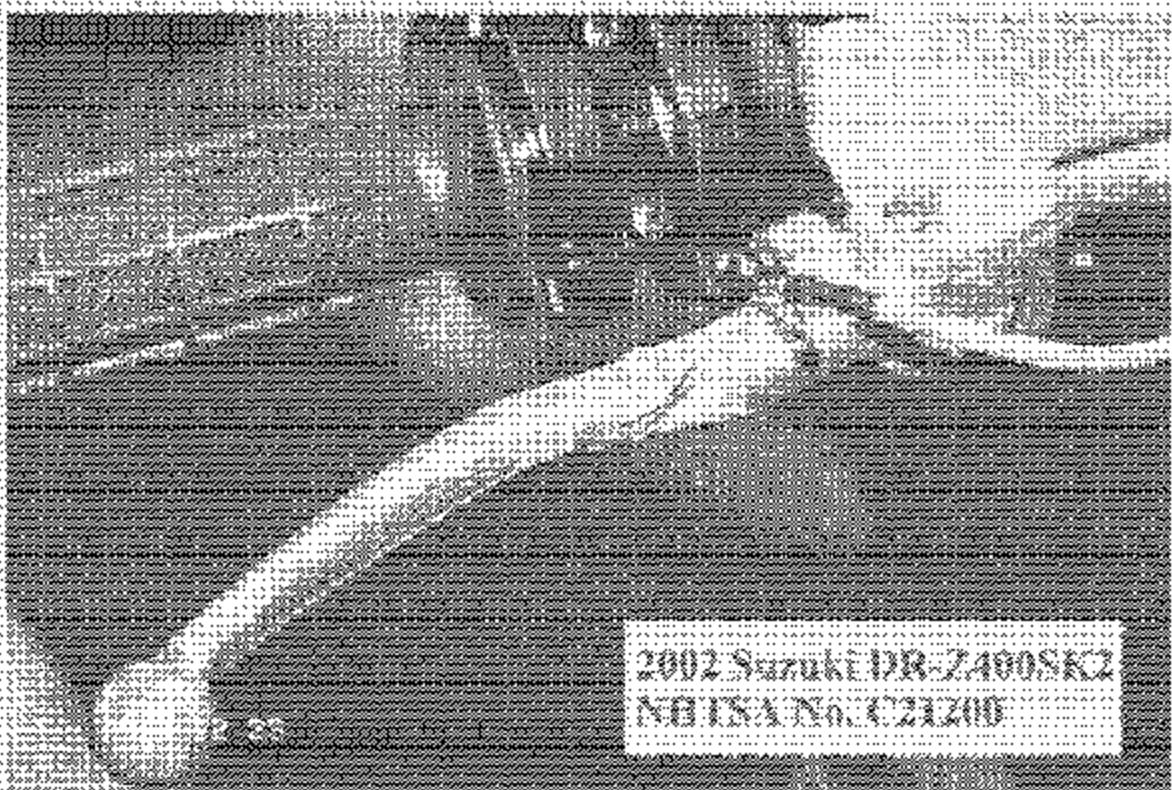


Photograph 11—Strain Gage Installation on Front Brake Lever.

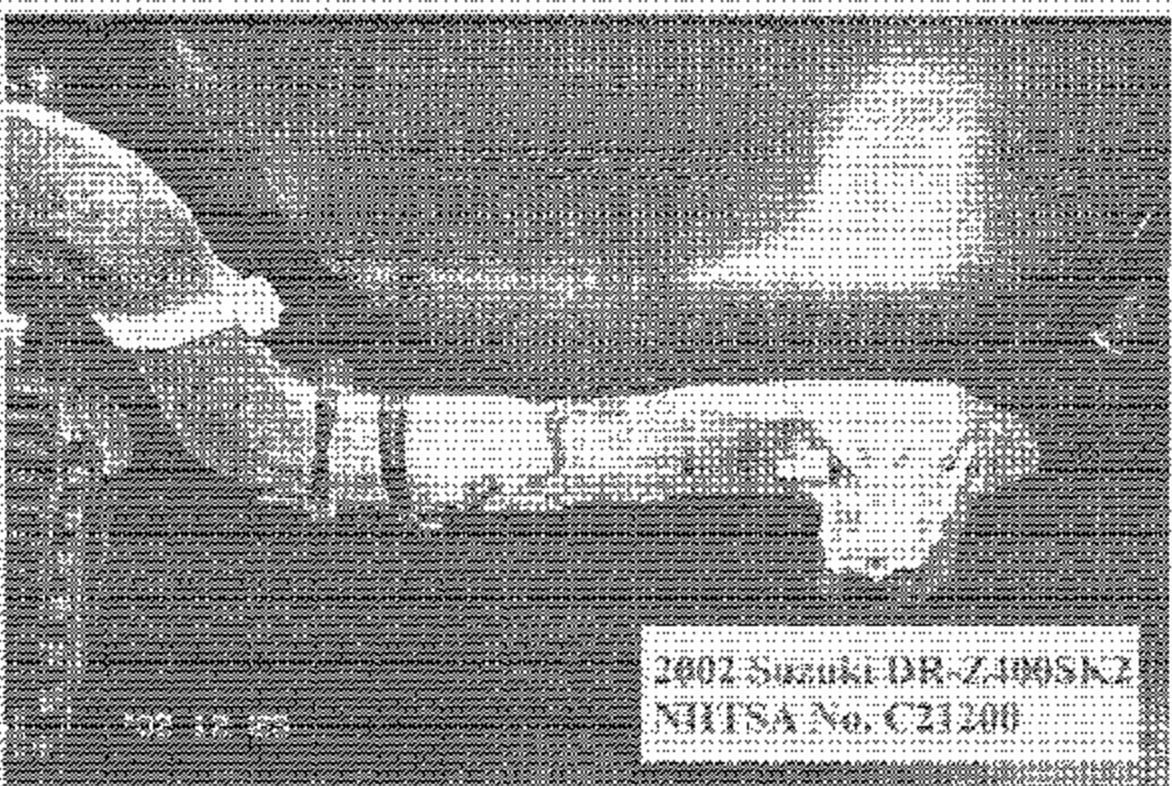

Photograph 12—Strain Gage Installation on Rear Brake Pedal.

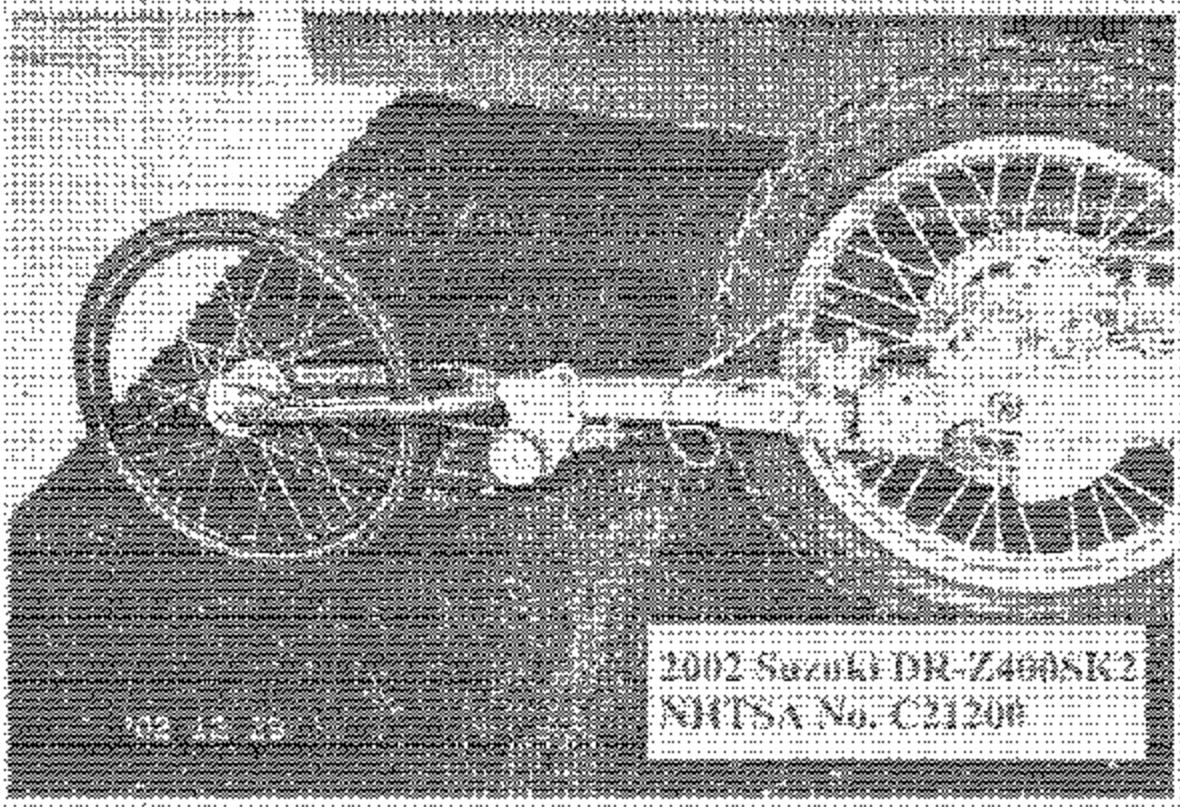

Photograph 13. Uninote Speed Sensor.

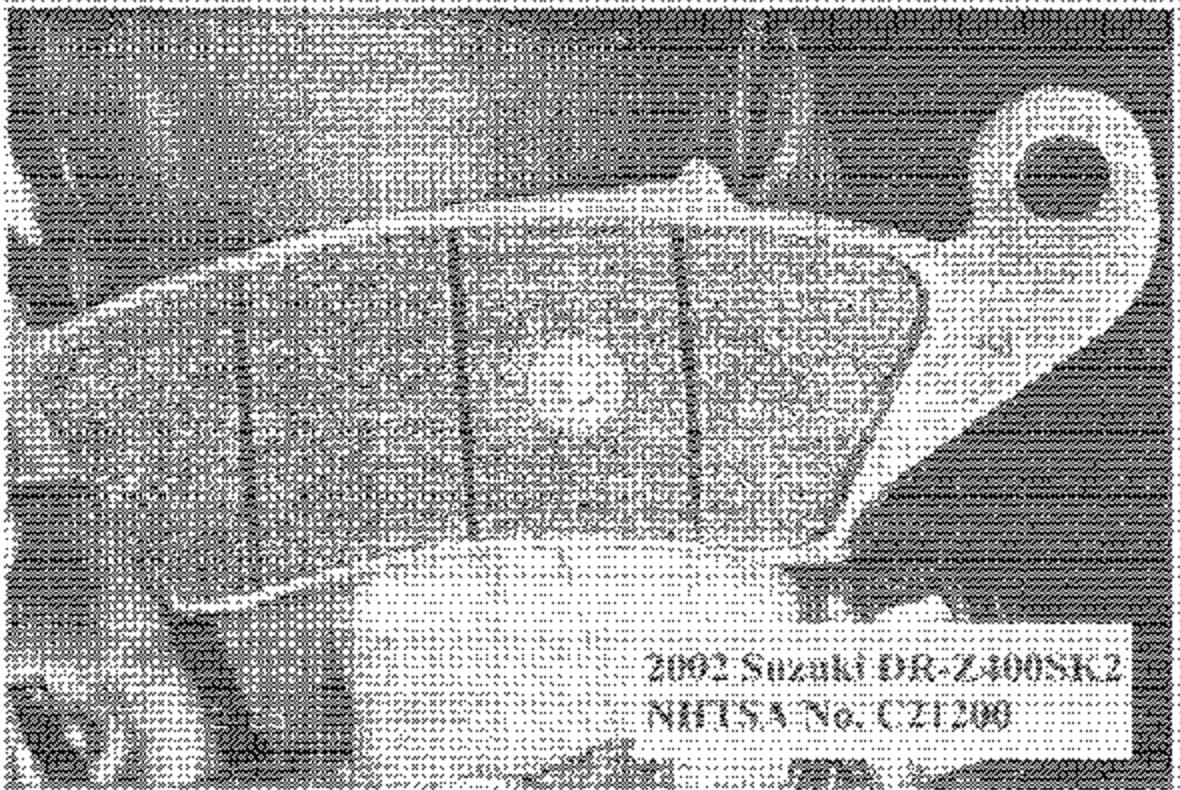

Photograph 14. Typical Disk Brake Pad Thermocouple Installation (Post-Test).