

Report No. 217-NVS-04-08

OFFICE OF VEHICLE SAFETY COMPLIANCE

FMVSS No. 217

"BUS EMERGENCY EXITS AND WINDOW RETENTION AND RELEASE"

Compliance Test Report

for a

2004 Orion V, 29 Passenger Transit Bus

NHTSA No. C46807



**U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF VEHICLE SAFETY COMPLIANCE
ROOM 6115, NVS-220
400 SEVENTH STREET, SW
WASHINGTON, DC 20590**

Prepared by the National Highway Traffic Safety Administration, this document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

Prepared by: Amanda Prescott

Approved by: Amanda Prescott

APrescott

Date: August 13, 2004

Technical Report Documentation Page

1. Report No. 217-NVS-04-08	2. Government Accession No. N/A	3. Recipient's Catalog No. N/A	
4. Title and Subtitle FMVSS 217 SAFETY COMPLIANCE TEST: BUS WINDOW RETENTION AND RELEASE 2004 Orion V, 29-PASSENGER TRANSIT BUS		5. Report Date August 13, 2004	
		6. Performing Organization Code OVSC	
7. Author(s) Annada Prescott, Compliance Engineer		8. Performing Organization Report No. 217-NVS-04-08	
9. Performing Organization Name and Address U.S. DEPARTMENT OF TRANSPORTATION NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION OFFICE OF VEHICLE SAFETY COMPLIANCE 400 SEVENTH STREET, S.W., ROOM 6111 WASHINGTON, D.C. 20590		10. Work Unit No. N/A	
		11. Contract or Grant No. N/A	
12. Sponsoring Agency Name and Address U.S. DEPARTMENT OF TRANSPORTATION NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION ENFORCEMENT OFFICE OF VEHICLE SAFETY COMPLIANCE (NVS-220) 400 SEVENTH STREET, S.W., ROOM 6111 WASHINGTON, D.C. 20590		13. Type of Report & Period Covered FINAL TEST REPORT	
		14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes None			
16. Abstract Tests were conducted on a 2004 Orion V, 29-passenger transit bus, NHTSA No. C40807, in accordance with the specification of the Office of Vehicle Safety Compliance (OVSC) Test Procedure TP-217TB-00 to determine compliance to the requirements of Federal Motor Vehicle Safety Standards (FMVSS) 217 "Bus Emergency Exits and Window Retention and Release".			
17. Key Words FMVSS 217 Compliance Test Window Release Window Retention		18. Distribution Statement N/A	
19. Security Class. (of this report) UNCLASSIFIED	20. Security Class. (of this page) UNCLASSIFIED	21. No. of Pages 22	22. Price N/A

TABLE OF CONTENTS

SECTION	DESCRIPTION	PAGE No.
1.0	Purpose of Compliance Test.....	2
2.0	Test Summary.....	3
3.0	Compliance Tests Data.....	4
4.0	Instrumentation and Equipment List.....	8
5.0	Photographs.....	9

SECTION 1.0 – PURPOSE OF COMPLIANCE TEST

Tests were conducted on a model year 2004 Orion V, 29-passenger transit bus, NHTSA No. C40807, in accordance with the Office of Vehicle Safety Compliance (OVSC) Test Procedure TP-217TB-00 to determine compliance to the requirements of Federal Motor Vehicle Safety Standards (FMVSS) 217, "Bus Emergency Exits and Window Retention and Release".

SECTION 2.0 – TEST SUMMARY

TEST SUMMARY

A 29-passenger, 2004 Orion V bus (VIN: 1VHAC3A2846502291) was tested to the requirements of Federal Motor Vehicle Safety Standard No. 217, "Bus Emergency Exits and Window Retention and Release" on August 9, 2004. The testing was performed by OVSC engineers. The bus was tested in accordance with the OVSC test procedure TP-217TB-00, dated June 25, 2002. The bus is equipped with four (4) emergency exit windows on the curb side of the bus, five (5) emergency exit windows on the street side of the bus and one (1) emergency roof exit located at the rear of the bus. A summary of results is provided in the table below.

Table 1 – Test Summary

Section	Description	Pass/Fail	Reason
S5.2	Provision of Emergency Exits	Pass	
S5.3	Emergency Exit Release	Pass	
S5.4	Emergency Exit Opening	Fail	Window 6 failed to meet the 267 N extension requirement.
S5.5	Emergency Exit Identification	Pass	
S5.1	Window Retention	Not Tested	

SECTION 3.0 – COMPLIANCE TEST DATA

DATA SHEET No. 1

PROVISION OF EMERGENCY EXITS

Table 2 - Provision of Emergency Exits

Exit Number	Emergency Exit Type and Location	Exit Dimensions	Exit Area	Maximum Credit Area Allowed (not to exceed 3,458 sq. cm)
1	Window, Right-Front	131 cm x 59 cm	7,729 sq. cm	3,458 sq. cm
2	Window, Right-Mid	131 cm x 83 cm	10,873 sq. cm	3,458 sq. cm
3	Window, Right-Mid	142 cm x 83 cm	11,786 sq. cm	3,458 sq. cm
4	Window, Right-Rear	142 cm x 83 cm	11,786 sq. cm	3,458 sq. cm
5	Window, Left-Rear	142 cm x 83 cm	11,786 sq. cm	3,458 sq. cm
6	Window, Left-Mid	142 cm x 83 cm	11,786 sq. cm	3,458 sq. cm
7	Window, Left-Mid	131 cm x 83 cm	10,873 sq. cm	3,458 sq. cm
8	Window, Left-Mid	131 cm x 83 cm	10,873 sq. cm	3,458 sq. cm
9	Window, Left-Front	84 cm x 84 cm	7,056 sq. cm	3,458 sq. cm
10	Roof Hatch, Rear	54 cm x 54 cm	2,916 sq. cm	2,916 sq. cm

Total Required Area = 29 Designated Seating Positions (DSPs) x 432 cm² = 12,528 cm²
Total Credit Area = 34,038 cm² (PASS)

Each side of the bus must contain 40% of the Total Required Area
(.40 x 12,528 cm²) = 5,011 cm²

Total Credit Area-Left Side (5 windows)= (5 x 3,458 cm²) = 17,290 cm² (PASS)
Total Credit Area-Right Side (4 windows)= (4 x 3,458 cm²) = 13,832 cm² (PASS)

The bus has a rear roof exit and the configuration of the bus appears to preclude the installation of an accessible rear exit.

DATA SHEET No. 2

Table 3 - Access Regions and Forces to Release Exits


Emergency Exit Type and Location	No. of Release Mechanisms	Access Region	Motion to Release Exit	Measured Force to Release Exit			Max. Force Allowable	Pass	Fail
				1)	2)	3)			
Window-Right-Front - Exit 1	1	High + Low	Rotary	63.7 N	68.6 N	73.5 N	89 N	X	
Window-Right-Mid - Exit 2	1	High + Low	Rotary	49 N	49 N	44.1 N	89 N	X	
Window-Right-Mid - Exit 3	1	High + Low	Rotary	49 N	44.1 N	39.2 N	89 N	X	
Window-Right-Rear - Exit 4	1	High + Low	Rotary	34.3 N	39.2 N	34.3 N	89 N	X	
Window-Left-Rear - Exit 5	1	High + Low	Rotary	24.5 N	19.6 N	19.6 N	89 N	X	
Window-Left-Mid - Exit 6	1	High + Low	Rotary	44.1 N	49 N	49 N	89 N	X	
Window-Left-Mid - Exit 7	1	High + Low	Rotary	49 N	49 N	49 N	89 N	X	
Window-Left-Mid - Exit 8	1	High + Low	Rotary	24.5 N	24.5 N	24.5 N	89 N	X	
Window-Left-Front - Exit 9	1	High + Low	Rotary	53.9 N	68.6 N	63.7 N	89 N	X	

Note:


Each release mechanism tested was exercised three times prior to measuring the release force. The term exercised is used to describe the action whereby the release mechanism is released and the window opened and then returned to its original unreleased location.

The forces were measured using a Shimpo MF handheld force gauge. The force gauge has a hook at one end that allows for the attachment of the gauge onto the release mechanism. After the gauge is attached an engineer applies a force to the gauge which is transferred to the release mechanism. The engineer applies increasingly greater force until the release mechanism is released. The force measured is recorded and the gauge is zeroed for the next test.

Access Regions for Low Force

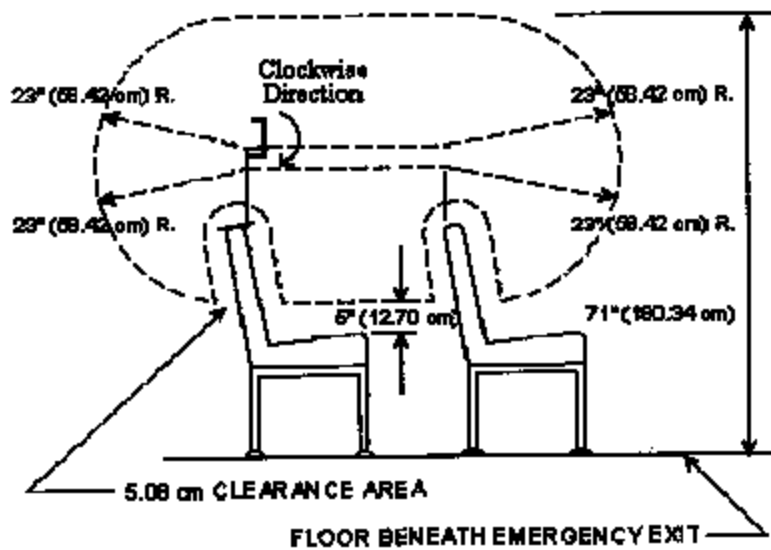

Access Regions for High Force

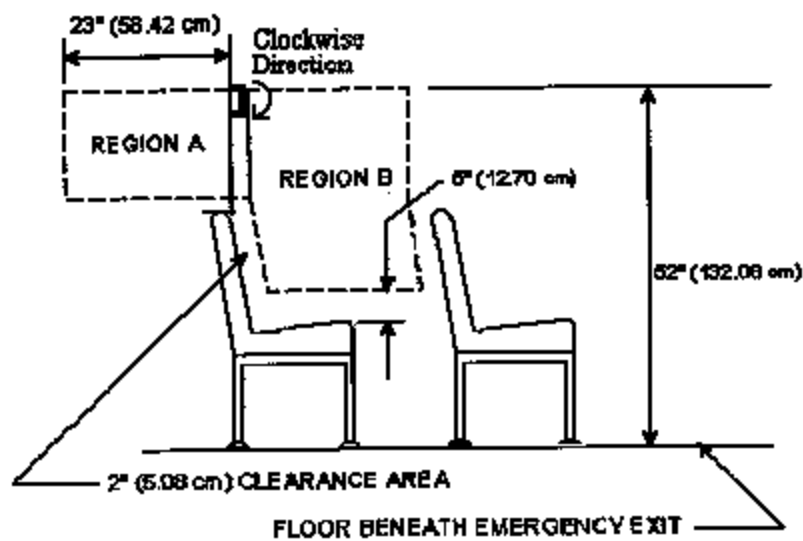

DATA SHEET No. 3

Table 4 - Access Regions and Forces to Open Exits

Emergency Exit Type and Location	Access Region	Motion to Extend Exit	Measured Force to Open Exit			Max. Force Allowable	Pass	Fail
			1)	2)	3)			
Window-Right-Front - Exit 1	High + Low	Straight and Perpendicular	1) 73.5 N	2) 58.8 N	3) 58.8 N	267 N	X	
Window-Right-Mid - Exit 2	High + Low	Straight and Perpendicular	1) 122.5 N	2) 132.3 N	3) 142.1 N	267 N	X	
Window-Right-Mid - Exit 3	High + Low	Straight and Perpendicular	1) 142.1 N	2) 186.2 N	3) 220.5 N	267 N	X	
Window-Right-Rear - Exit 4	High + Low	Straight and Perpendicular	1) 122.5 N	2) 132.3 N	3) 147 N	267 N	X	
Window-Left-Rear - Exit 5	High + Low	Straight and Perpendicular	1) 205.8 N	2) 240.1 N	3) 240.1 N	267 N	X	
Window-Left-Mid - Exit 6	High + Low	Straight and Perpendicular	1) 269.5 N	2) 313.6 N	3) 333.2 N	267 N		X
Window-Left-Mid - Exit 7	High + Low	Straight and Perpendicular	1) 151.9 N	2) 171.5 N	3) 186.2 N	267 N	X	
Window-Left-Mid - Exit 8	High + Low	Straight and Perpendicular	1) 220.5 N	2) 230.3 N	3) 240.1 N	267 N	X	
Window-Left-Front - Exit 9	High + Low	Straight and Perpendicular	1) 24.5 N	2) 29.4 N	3) 29.4 N	267 N	X	

A Shimpo MF handheld force gauge is used to measure the force to open the exit. The force gauge has a flat attachment on one end that provides a surface to place against the exit. The exit is released prior to measuring the force to open the exit. An engineer then applies an increasing force to the force gauge until the exit is opened allowing passage of the 33cm by 50cm ellipsoid. The force is recorded and the gauge is zeroed for the next test.

Emergency Exit Identification

1. Each emergency exit has a permanently affixed, legible label or placard with the designation "Emergency Door" or "Emergency Exit." **PASS**
2. Each emergency exit has a permanently affixed, legible label or placard describing the motion necessary to release (unlatch) and open the exit. **PASS**
3. The label is within 16 cm of the nearest release mechanism. **PASS**

SECTION 4.0 – INSTRUMENTATION AND EQUIPMENT LIST

INSTRUMENTATION AND EQUIPMENT LIST

EQUIPMENT	DESCRIPTION	SERIAL NO.
Ellipsoid	Minor Axis = 33 cm Major Axis = 50 cm	N/A
Force gauge	Shimpo MF	505110
Craftsman 8m Tape Measure	Tape Measure	N/A

SECTION 5.0

PHOTOGRAPHS LIST

Photo 1 - Exterior Front View..... 10

Photo 2 - Exterior Side View..... 11

Photo 3 - Interior Rear View..... 12

Photo 4 - Interior Front View..... 13

Photo 5 - Emergency Exit Label..... 14

Photo 6 - Emergency Exit..... 15

Photo 7 - Roof Emergency Exit..... 16

Photo 8 - Certification Label..... 17

Photo 9 - Window 6 Lubricated Slider..... 18

Photo 10 - Window 6 Edge View..... 19



Photo 1 - Exterior Front View

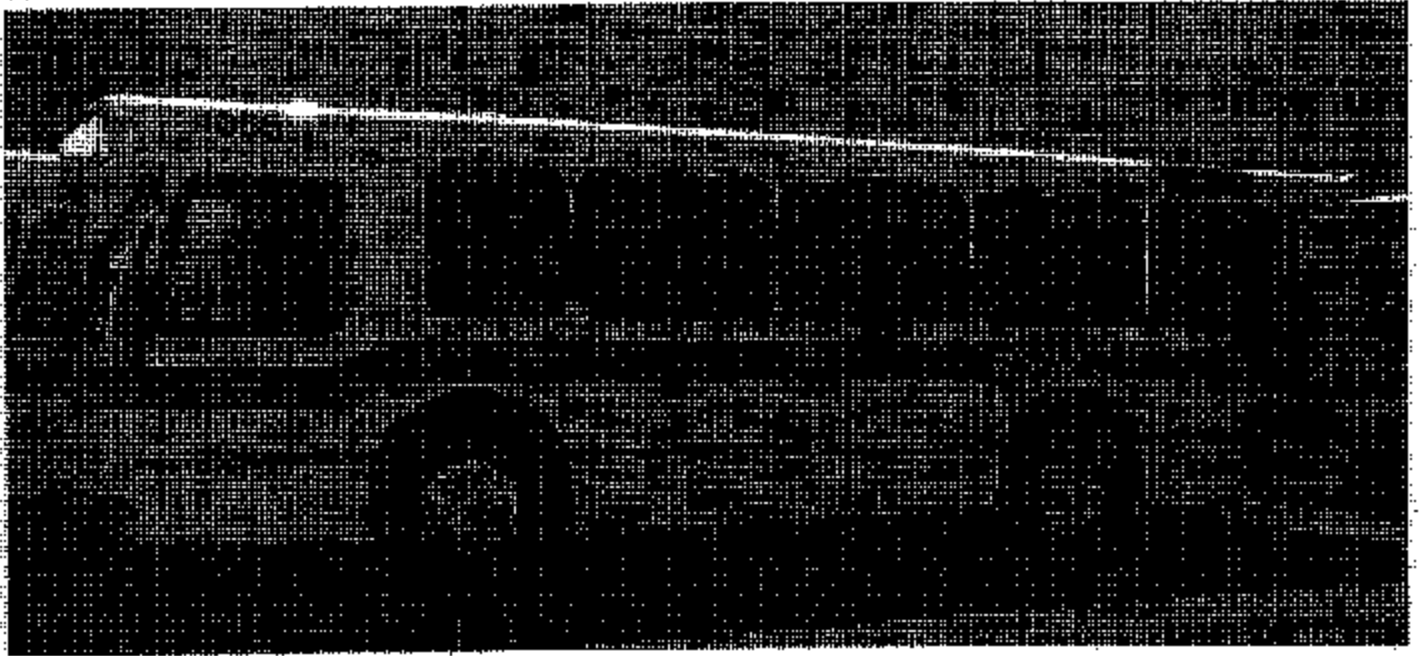


Photo 2 - Exterior Side View



Photo 3 – Interior Rear View



Photo 4 – Interior Front View

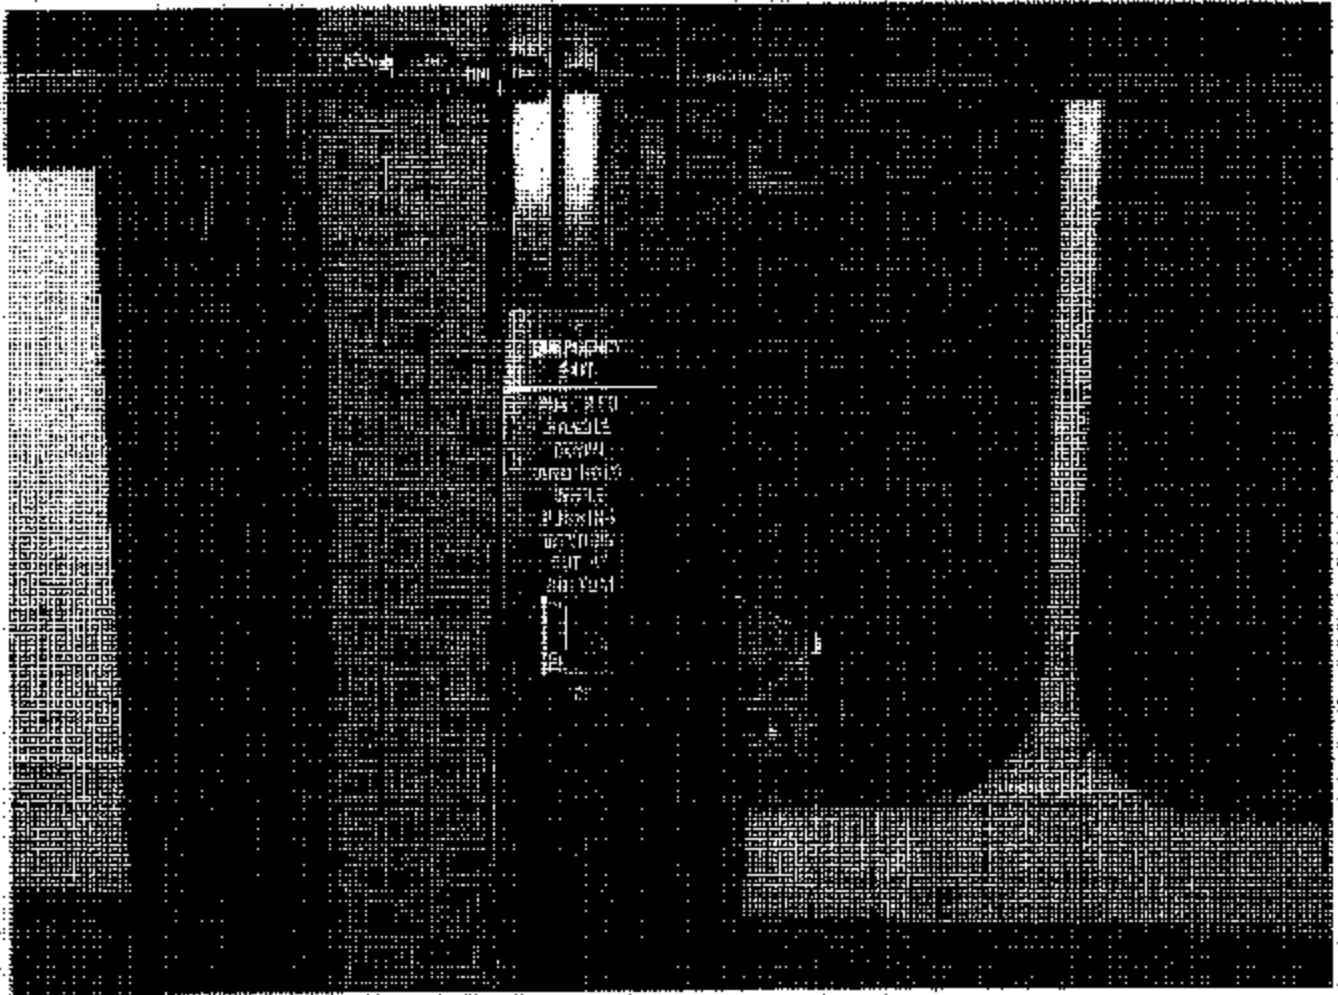


Photo 5 - Emergency Exit Label

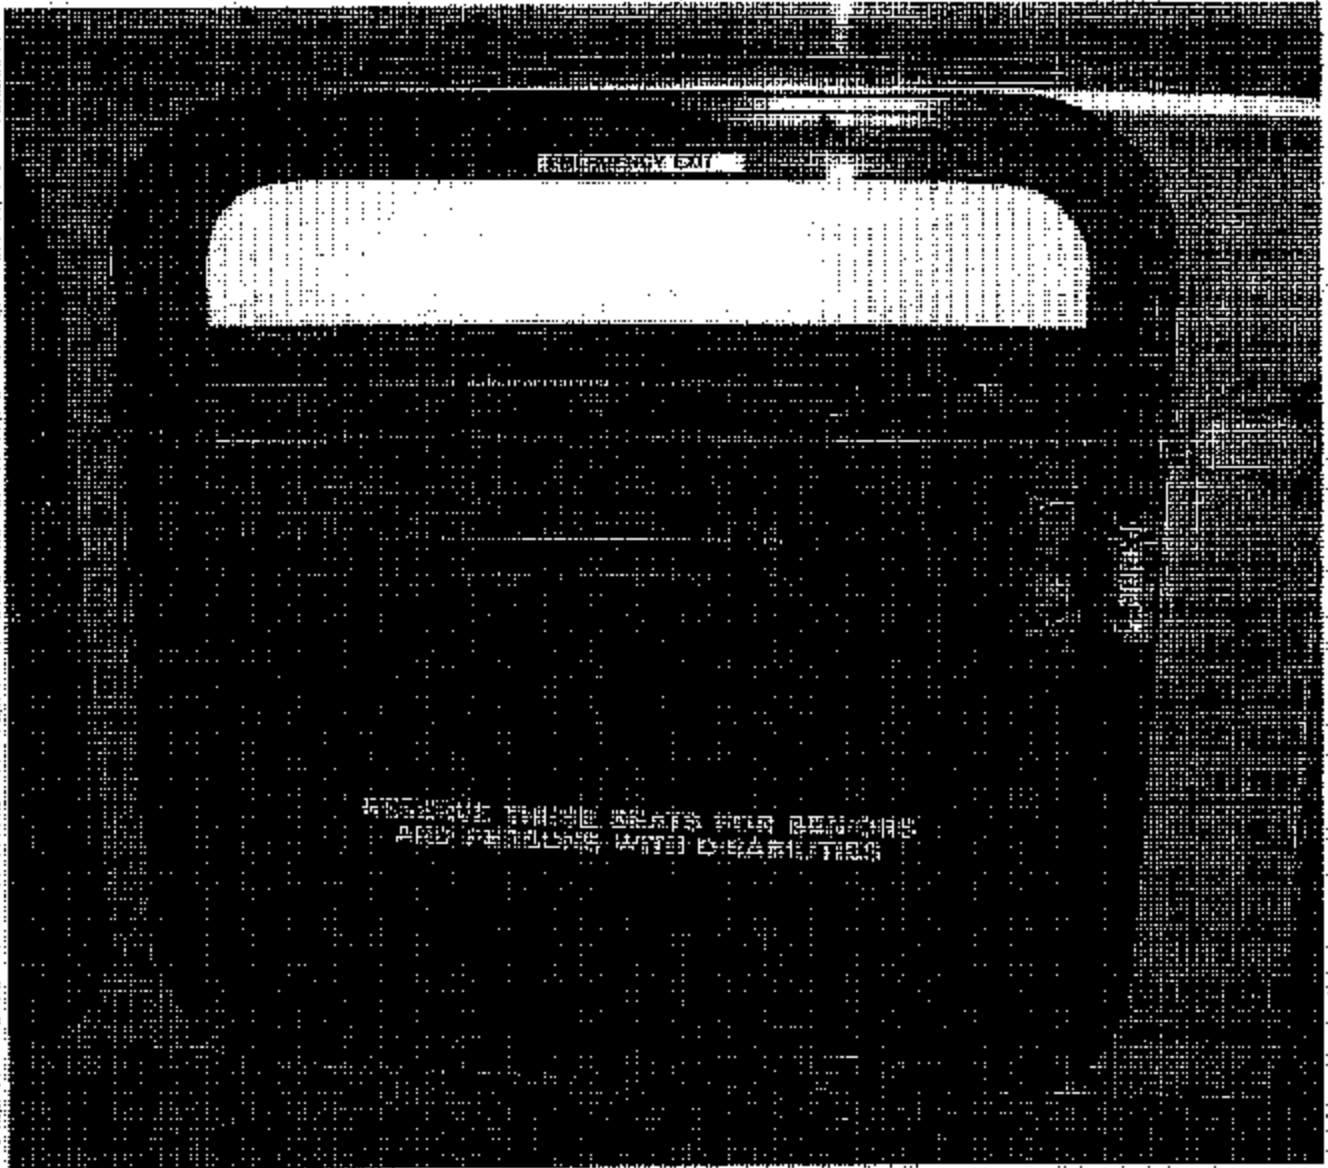


Photo 6 - Emergency Exit

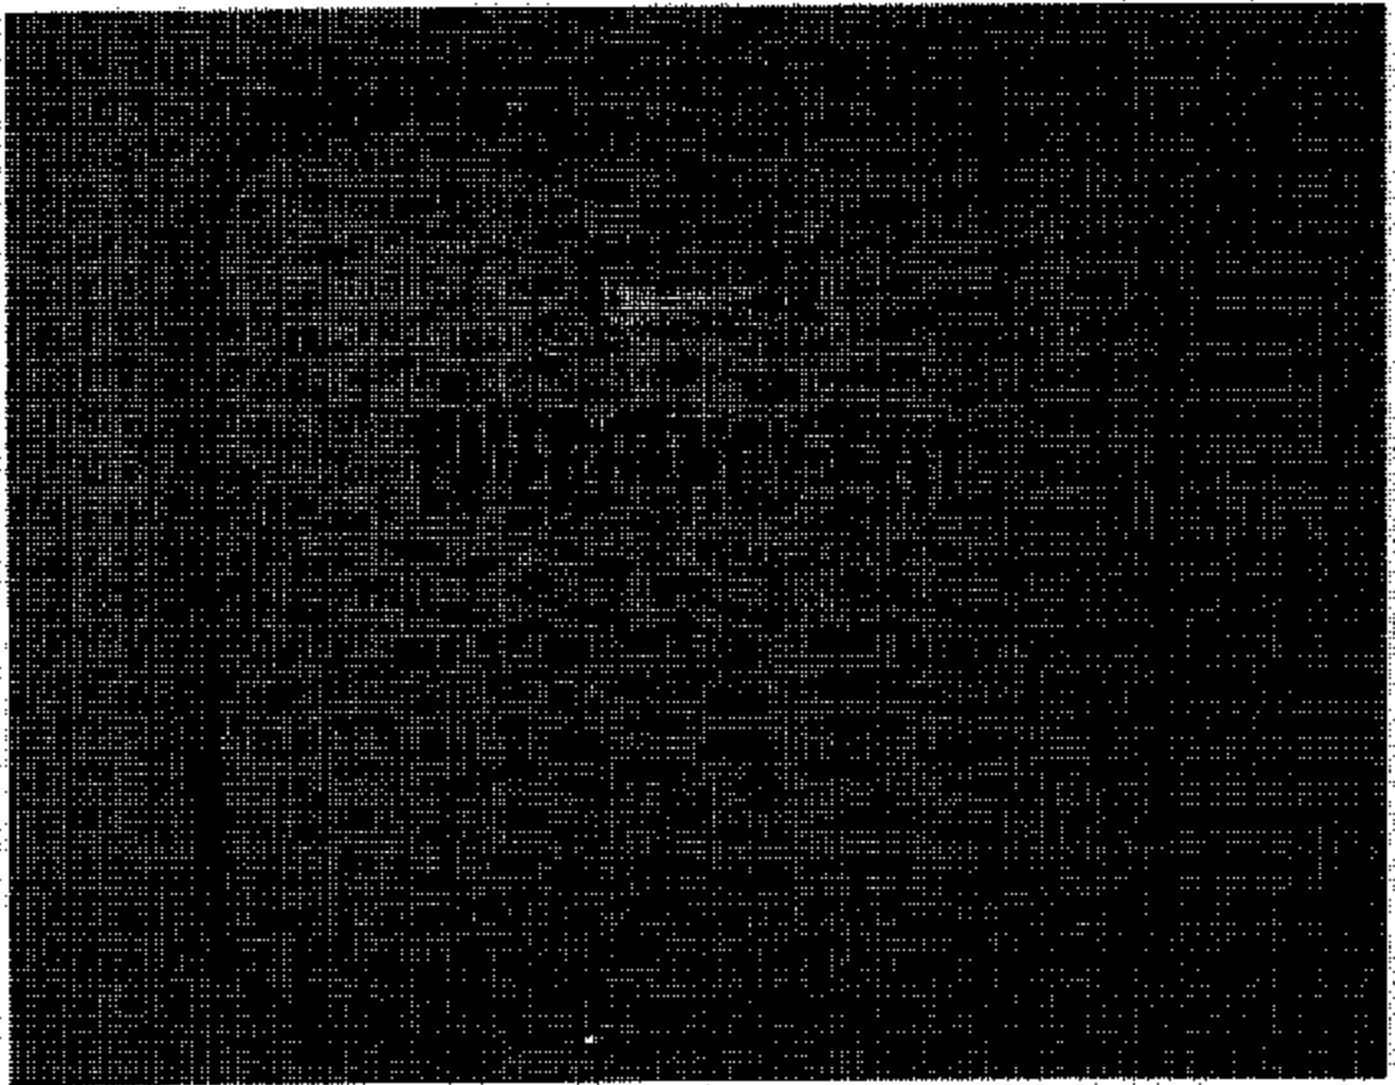


Photo 7 – Roof Emergency Exit

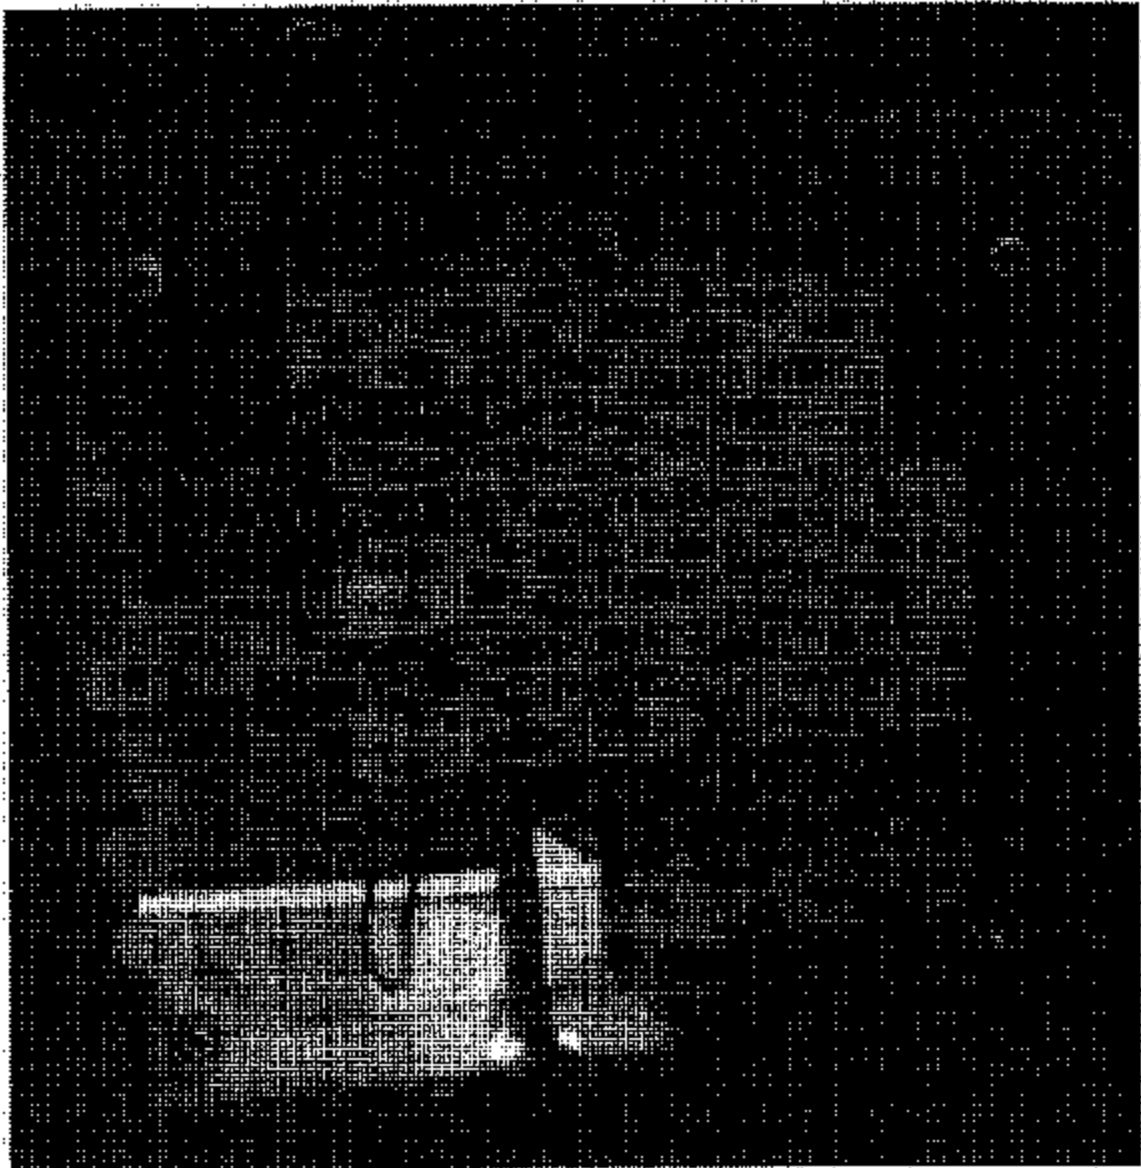


Photo 8 -- Certification Label

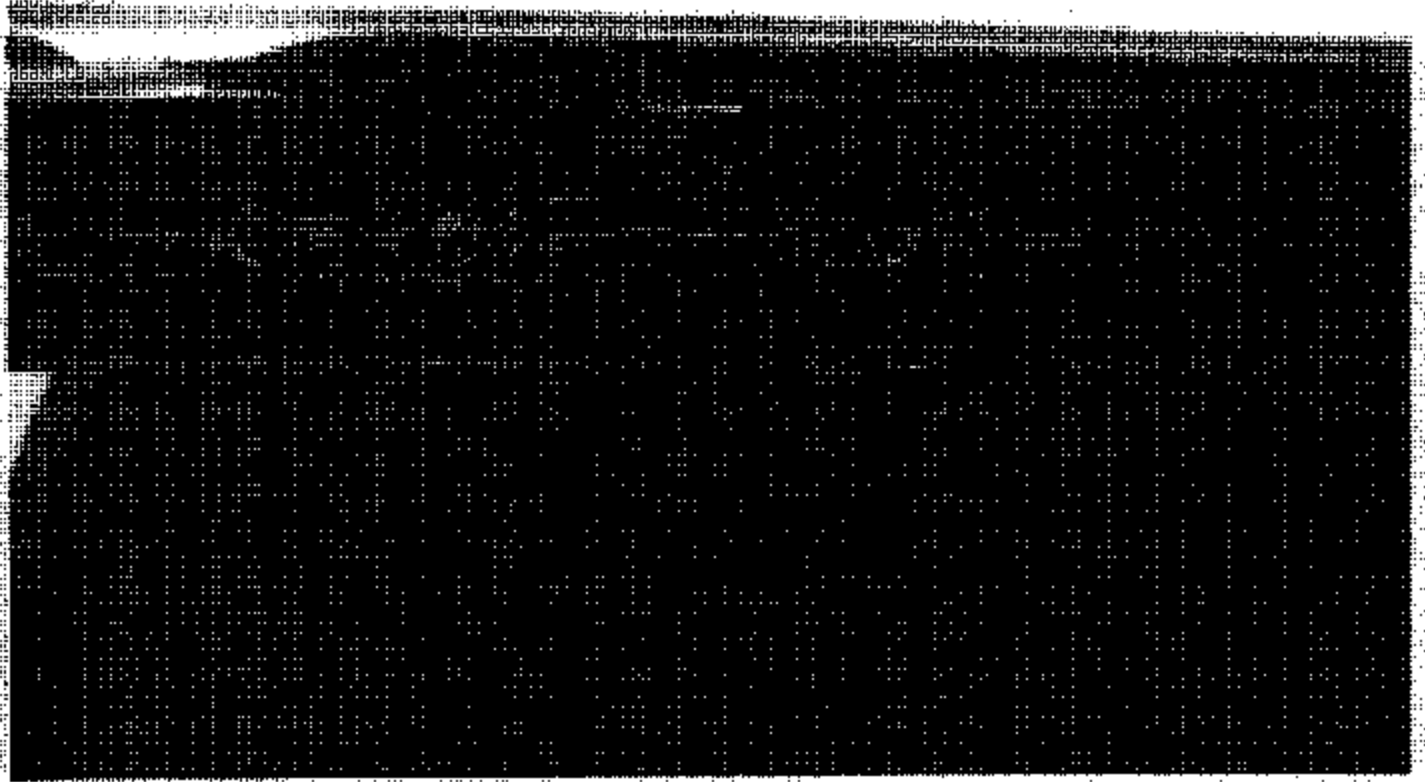


Photo 9 – Window 6 Lubricated Slider



Photo 10 – Window 6 Edge View