


REPORT NUMBER: 208-MGA-2005-005

**VEHICLE SAFETY COMPLIANCE TESTING
FOR
FMVSS 208, OCCUPANT CRASH PROTECTION
FMVSS 212, WINDSHIELD MOUNTING
FMVSS 219, WINDSHIELD INTRUSION (PARTIAL)
FMVSS 301, FUEL SYSTEM INTEGRITY**

**Toyota Motor Corporation
2005 Toyota Highlander
NHTSA No.: C55107**

**PREPARED BY:
MGA RESEARCH CORPORATION
5000 WARREN ROAD
BURLINGTON, WI 53105**

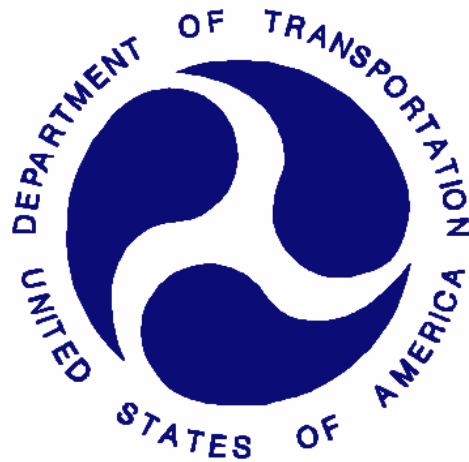

Test Date: April 26, 2005

Final Report Date: June 1, 2005

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
MAIL CODE: NVS-220
400 SEVENTH STREET, SW, ROOM 6115
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-03-D-11002.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared Jeff Lewandowski Date: June 1, 2005
Jeff Lewandowski, Project Engineer

Reviewed by: David Winkelbauer Date: June 1, 2005
David Winkelbauer, Facility Director

FINAL REPORT ACCEPTED BY OVSC:

Accepted By: _____

Acceptance Date: _____

Technical Report Documentation Page

1. Report No. 208-MGA-2005-005		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 208 Compliance Testing of a 2005 Toyota Highlander MPV NHTSA No.: C55107				5. Report Date June 1, 2005	
				6. Performing Organization Code MGA	
7. Author(s) Jeff Lewandowski, Project Engineer				8. Performing Organization Report No. 208-MGA-2005-005	
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105				10. Work Unit No.	
				11. Contract or Grant No. DTNH22-03-D-11002	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Enforcement Office of Vehicle Safety Compliance 400 Seventh St., S.W., Room 6115 NVS-220 Washington, D.C. 20590				13. Type of Report and Period Covered 04/26/05 - 06/01/05	
				14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes					
16. Abstract Compliance tests were conducted on the subject 2005 Toyota Highlander in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP208-12 for the determination of FMVSS 208 compliance. Test failures identified were as follows: TEST FAILURES: None					
17. Key Words Frontal Impact 40 kmph Vehicle Safety Compliance Testing FMVSS 208, "Occupant Crash Protection" FMVSS 212, "Windshield Mounting" FMVSS 219, (partial), "Windshield Zone Intrusion" FMVSS 301, "Fuel System Integrity"				18. Distribution Statement Copies of this report are available from the following: NHTSA Technical Information Services (TIS), Mail Code: NPO-230 400 Seventh Street, S.W., Room 5108 Washington, D.C. 20590 Tel. No.: (202) 366-4946	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 167	22. Price

Form DOT F1700.7 (8-72)

TABLE OF CONTENTS

<u>Section</u>		<u>Page No</u>
1	Purpose of Compliance Test	1
2	Tests Performed	2
3	Injury Result Summary	4
4	Discussion of Test (if applicable)	5
5	Test Data Sheets	6
 <u>Data Sheet</u>		
1	COTR Vehicle Work Order	7
2	Report of Vehicle Condition	11
3	Certification Label and Tire Placard Information	13
14	Marking of Reference Points for Various Test Positions & Points	14
30	Vehicle Weight, Fuel Tank, and Attitude Data	21
31	Vehicle Accelerometer Locations and Measurements	25
32	Photographic Targets	28
33	Camera Locations	34
34	Dummy Positioning	36
35	Dummy Measurements	49
36	Crash Test	52
38	Accident Investigation Measurements	54
39	Windshield Mounting (FMVSS 212)	56
40	Windshield Zone Intrusion (FMVSS 219)	58
41	Fuel System Integrity (FMVSS 301)	60
 <u>Appendix</u>		
A	Crash Test Data	A-1
B	Crash Test Photographs	B-1
C	Instrumentation Calibration	C-1

SECTION 1
PURPOSE OF COMPLIANCE TEST

This Federal Motor Vehicle Safety Standard (FMVSS) 208 compliance test is part of a program conducted for the National Highway Traffic Safety Administration (NHTSA) by MGA Research Corporation (MGA) under Contract No. DTNH22-03-D-11002. The purpose of this test was to determine whether the subject vehicle, a 2005 Toyota Highlander MPV, NHTSA No. C55107, meets certain performance requirements of FMVSS 208, "Occupant Crash Protection"; FMVSS 212, "Windshield Mounting"; FMVSS 219, "Windshield Zone Intrusion"; and FMVSS 301, "Fuel System Integrity". The compliance test was conducted in accordance with OVSC Laboratory Test Procedure No. TP208-12 dated January 14, 2003.

SECTION 2 TESTS PERFORMED

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance

NHTSA No.: C55107
 Test Dates: 4/26/05

The following checked items indicate the tests that were performed:

- | | | |
|-------------------------------------|-----|---|
| <input type="checkbox"/> | 1. | Rear outboard seating position seat belts (S4.1.1.2(b) & (S4.2.4)) |
| <input type="checkbox"/> | 2. | Air bag labels (S4.5.1) |
| <input type="checkbox"/> | 3. | Readiness indicator (S4.5.2) |
| <input type="checkbox"/> | 4. | Passenger air bag manual cut-off device (S4.5.4) |
| <input type="checkbox"/> | 5. | Lap belt lockability (S7.1.1.5) |
| <input type="checkbox"/> | 6. | Seat belt warning system (S7.3) |
| <input type="checkbox"/> | 7. | Seat belt contact force (S7.4.4) |
| <input type="checkbox"/> | 8. | Seat belt latch plate access (S7.4.4) |
| <input type="checkbox"/> | 9. | Seat belt retraction (S7.4.5) |
| <input type="checkbox"/> | 10. | Seat belt guides and hardware (S7.4.6) |
| <input type="checkbox"/> | 11. | Suppression tests with 12-month-old CRABI dummy (Part 572, Subpart R) |
| <input type="checkbox"/> | 12. | Suppression tests with newborn infant (Part 572, Subpart K) |
| <input type="checkbox"/> | 13. | Suppression tests with 3-year-old dummy (Part 572, Subpart P) |
| <input type="checkbox"/> | 14. | Suppression tests with 6-year-old dummy (Part 572, Subpart N) |
| <input type="checkbox"/> | 15. | Test of reactivation of the passenger air bag system with an unbelted 5 th percentile female dummy |
| <input type="checkbox"/> | 16. | Low risk deployment test with 12-month-old dummy (Part 572, Subpart R) |
| <input type="checkbox"/> | 17. | Low risk deployment test with 3-year-old dummy (Part 572, Subpart P) |
| <input type="checkbox"/> | 18. | Low risk deployment test with 6-year-old dummy (Part 572, Subpart N) |
| <input type="checkbox"/> | 19. | Low risk deployment test with 5 th female dummy (Part 572, Subpart O) |
| <input checked="" type="checkbox"/> | 20. | Impact Tests |
| <input type="checkbox"/> | | Frontal Oblique |
| <input type="checkbox"/> | | Belted 50 th male dummy driver and passenger (0 to 48 kmph) (S5.1.1(a)) |
| <input type="checkbox"/> | | Unbelted 50 th male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a)(1)) |
| <input type="checkbox"/> | | Unbelted 50 th male dummy driver and passenger (32 to 40 kmph) (S5.1.2(a) (1) or S5.1.2(b)) |
| <input checked="" type="checkbox"/> | | Frontal 0° |
| <input type="checkbox"/> | | Belted 50 th male dummy driver (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a)) |
| <input type="checkbox"/> | | Belted 50 th male dummy passenger (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a)) |
| <input type="checkbox"/> | | Belted 5 th female dummy driver (0 to 48 kmph) (S16.1(a)) |
| <input type="checkbox"/> | | Belted 5 th female dummy passenger (0 to 48 kmph) (S16.1(a)) |
| <input type="checkbox"/> | | Belted 50 th male dummy driver and passenger (0 to 56 kmph) (S5.1.1.(b)(2)) |
| <input type="checkbox"/> | | Unbelted 50 th male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a) (1)) |
| <input type="checkbox"/> | | Unbelted 50 th male dummy driver (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b)) |
| <input type="checkbox"/> | | Unbelted 50 th male dummy passenger (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b)) |

- | | |
|-------------------------------------|---|
| <input checked="" type="checkbox"/> | Unbelted 5 th female dummy driver (32 to 40 kmph) (S16.1(b)) |
| <input checked="" type="checkbox"/> | Unbelted 5 th female dummy passenger (32 to 40 kmph) (S16.1(b)) |
| <input type="checkbox"/> | 40% Offset 0° Belted 5 th male dummy driver and passenger (0 to 40 kmph) (S18.1) |
| <input type="checkbox"/> | 21. Sled Test: unbelted 50 th male dummy driver and passenger (S13) |
| <input type="checkbox"/> | 22. FMVSS 204 Indicant Test |
| <input checked="" type="checkbox"/> | 23. FMVSS 212 Test |
| <input checked="" type="checkbox"/> | 24. FMVSS 219 Indicant Test |
| <input checked="" type="checkbox"/> | 25. FMVSS 301 Frontal Test |

For the crash tests, the vehicle was instrumented with 8 accelerometers. The accelerometer data from the vehicle and dummies were sampled at 10,000 samples per second and processed as specified in SAE J211/1 MAR95 and FMVSS 208, S4.13.

The dynamic tests were recorded using high-speed film and high-speed digital video.

SECTION 3

INJURY RESULT SUMMARY FOR FMVSS 208 TESTS

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance

NHTSA No.: C55107
 Test Date: 04/26/05

40 kmph Frontal Crash

Impact Angle: Zero degrees

Belted Dummies: Yes No
 Speed Range: 0 to 40 kmph 32 to 40 kmph
 0 to 48 kmph 0 to 56 kmph

Test Speed: 39.8 kmph Test Weight: 1814.4 kg

Driver Dummy: 5th female 50th male
 Passenger Dummy: 5th female 50th male

5th Percentile Female Frontal Crash Test Vehicles certified to S16.1(a), S16.1(b), or S18.1

Injury Criteria	Max. Allowable Injury Assessment Values	Driver	Passenger
HIC15	700	79	61
N _{te}	1.0	0.4	0.2
N _{tf}	1.0	0.3	0.3
N _{ce}	1.0	0.0	0.2
N _{cf}	1.0	0.2	0.5
Neck Tension	2620 N	1083	405
Neck Compression	2520 N	166	512
Chest g	60 g	46	34
Chest Displacement	52 mm	22	8
Left Femur	6805 N	3807	4328
Right Femur	6805 N	4078	4503

SECTION 4
DISCUSSION OF TESTS


Test Vehicle: 2005 Toyota Highlander MPV
Test Program: FMVSS 208 Compliance

NHTSA No.: C55107
Test Date: 4/26/05

The vehicle was tested in a 25 mph frontal impact only. FMVSS 208 Datasheets not used for this test have been removed from the report.

An advanced load cell rigid barrier was used for the test. The details of the barrier are shown below. A photograph of the vehicle in relation to the load cell grid is included in Appendix A. Plots of the total force of all 9 rows and an overlay plot of the summed force from each row are included in Appendix B. The vehicle impacted the barrier 4mm higher than the initial target.

144 Load Cell Rigid Barrier
Load Cell Locations on Fixed Barrier

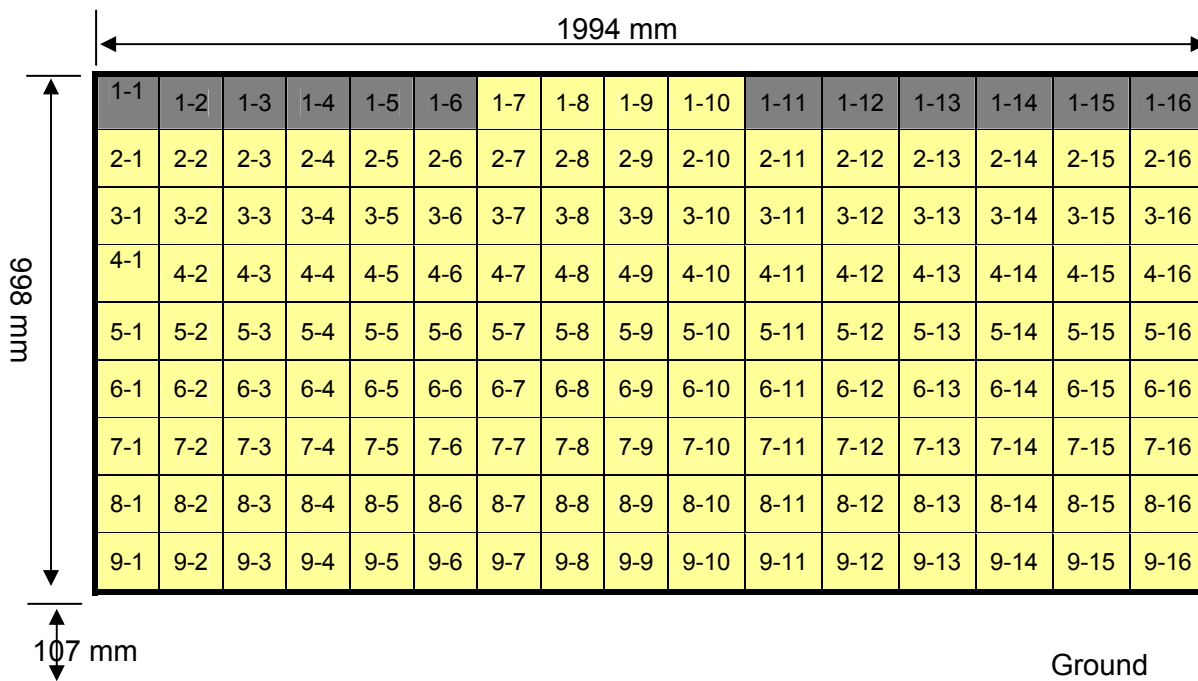

Load Cells are 121 mm x 121 mm with a 7 mm gap between each load cell.

SECTION 5
TEST DATA SHEETS

Test Vehicle: 2005 Toyota Highlander MPV
Test Program: FMVSS 208 Compliance

NHTSA No.: C55107
Test Dates: 4/26/05

DATA SHEET 1
COTR VEHICLE WORK ORDER

Test Vehicle: 2005 Toyota Highlander MPV

NHTSA No.: C55107

Test Program: FMVSS 208 Compliance

Test Dates: 4/26/05

COTR Signature: Charles R. Case

Test to be performed for this vehicle are checked below:

- | | | |
|--------------------------|-----|---|
| <input type="checkbox"/> | 1. | Rear Outboard Seating Position Seat Belts (S4.1.2(b)) & (S4.2.4) |
| <input type="checkbox"/> | 2. | Air Bag Labels (S4.5.1) |
| <input type="checkbox"/> | 3. | Readiness Indicator (S4.5.2) |
| <input type="checkbox"/> | 4. | Passenger Air Bag Manual Cut-off Device (S4.5.4) |
| <input type="checkbox"/> | 5. | Lap Belt Lockability (S7.1.1.5) |
| <input type="checkbox"/> | 6. | Seat Belt Warning System (S7.3) |
| <input type="checkbox"/> | 7. | Seat Belt Contact Force (S7.4.4) |
| <input type="checkbox"/> | 8. | Seat Belt Latch Plate Access (S7.4.4) |
| <input type="checkbox"/> | 9. | Seat Belt Retraction (S7.4.5) |
| <input type="checkbox"/> | 10. | Seat Belt Guides and Hardware (S7.4.6) |
| <input type="checkbox"/> | 11. | Suppression tests with 12-month-old CRABI dummy (Part 572, Subpart R) using the following indicated child restraints. |

Section B

<input type="checkbox"/>	Britax Handle with Care 191	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Century Assura 4553	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Century Avanta SE 41530	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Century Smart Fit 4543	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Arriva 02727	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Opus 35 02603	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Discovery Adjust Right 212	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo First Choice 204	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo On My Way Position Right V 282	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco Infant 8457	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward

Section C

<input type="checkbox"/>	Britax Roundabout 161	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Century Encore 4612	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Century STE 1000 4416	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Olympian 02803	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Touriva 02519	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Horizon V 425	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Medallion 254	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward

- | | | |
|--------------------------|-----|---|
| <input type="checkbox"/> | 12. | Suppression tests with newborn infant (Part 572, Subpart K) using the following indicated child restraints. |
|--------------------------|-----|---|

Section A

- | | | | | | | | |
|--------------------------|-------------------------|---|---------------|--------------------------|--------------|--------------------------|--------------|
| <input type="checkbox"/> | Cosco Dream Ride 02-719 | <input type="checkbox"/> | Full Rearward | <input type="checkbox"/> | Mid Position | <input type="checkbox"/> | Full Forward |
| <input type="checkbox"/> | 13. | Suppression tests with 3-year-old dummy (Part 572, Subpart P) using the following indicated child restraints where a child restraint is required. | | | | | |

Section C

	Britax Roundabout 161	Full Rearward	Mid Position	Full Forward
	Century Encore 4612	Full Rearward	Mid Position	Full Forward
	Century STE 1000 4416	Full Rearward	Mid Position	Full Forward
	Cosco Olympian 02803	Full Rearward	Mid Position	Full Forward
	Cosco Touriva 02519	Full Rearward	Mid Position	Full Forward
	Evenflo Horizon V 425	Full Rearward	Mid Position	Full Forward
	Evenflo Medallion 254	Full Rearward	Mid Position	Full Forward

Section D

	Britax Roadster 9004	Full Rearward	Mid Position	Full Forward
	Century Next Step 4920	Full Rearward	Mid Position	Full Forward
	Cosco High Back Booster 02-442	Full Rearward	Mid Position	Full Forward
	Evenflo Right Fit 245	Full Rearward	Mid Position	Full Forward

14. Suppression tests with representative 3-year-old child using the following indicated child restraints where a child restraint is required. (Appendix H, Data Sheet 16H and 17H)

Section C

	Britax Roundabout 161	Full Rearward	Mid Position	Full Forward
	Century Encore 4612	Full Rearward	Mid Position	Full Forward
	Century STE 1000 4416	Full Rearward	Mid Position	Full Forward
	Cosco Olympian 02803	Full Rearward	Mid Position	Full Forward
	Cosco Touriva 02519	Full Rearward	Mid Position	Full Forward
	Evenflo Horizon V 425	Full Rearward	Mid Position	Full Forward
	Evenflo Medallion 254	Full Rearward	Mid Position	Full Forward

Section D

	Britax Roadster 9004	Full Rearward	Mid Position	Full Forward
	Century Next Step 4920	Full Rearward	Mid Position	Full Forward
	Cosco High Back Booster 02-442	Full Rearward	Mid Position	Full Forward
	Evenflo Right Fit 245	Full Rearward	Mid Position	Full Forward

15. Suppression tests with 3-year-old dummy (Part 572, Subpart P) in the following Forward, Middle, and Rearward seat track positions

- Sitting on seat with back against seat back (S22.2.2.1)
- Sitting on seat with back against reclined seat back (S22.2.2.2)
- Sitting on seat with back not against seat back (S22.2.2.3)
- Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)
- Standing on seat, facing forward (S22.2.2.5)
- Kneeling on seat facing forward (S22.2.2.6)
- Kneeling on seat facing rearward (S22.2.2.7)
- Lying on seat (S22.2.2.8)

16. Suppression tests with representative 3-year-old child in the following positions

- Sitting on seat with back against seat back (S22.2.2.1)
- Sitting on seat with back against reclined seat back (S22.2.2.2)
- Sitting on seat with back not against seat back (S22.2.2.3)
- Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)
- Standing on seat, facing forward (S22.2.2.5)
- Kneeling on seat facing forward (S22.2.2.6)
- Kneeling on seat facing rearward (S22.2.2.7)
- Lying on seat (S22.2.2.8)

17. Suppression tests with 6-year-old dummy (Part 572, Subpart N) using the following indicated child restraints where a child restraint is required.

Section D

	Britax Roadster 9004	Full Rearward	Mid Position	Full Forward
	Century Next Step 4920	Full Rearward	Mid Position	Full Forward
	Cosco High Back Booster 02-442	Full Rearward	Mid Position	Full Forward
	Evenflo Right Fit 245	Full Rearward	Mid Position	Full Forward
18.	Suppression tests with representative 6-year-old child using the following indicated child restraints where a child restraint is required.			

Section D

	Britax Roadster 9004	Full Rearward	Mid Position	Full Forward
	Century Next Step 4920	Full Rearward	Mid Position	Full Forward
	Cosco High Back Booster 02-442	Full Rearward	Mid Position	Full Forward
	Evenflo Right Fit 245	Full Rearward	Mid Position	Full Forward
19.	Suppression tests with 6-year-old dummy (Part 572, Subpart N) in the following Forward, Middle, and Rearward seat track positions			

- Sitting on seat with back against seat back (S22.2.2.1)
- Sitting on seat with back against reclined seat back (S22.2.2.2)
- Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)
- Sitting back in the seat and leaning on the right front passenger door (S24.2.3)

20.	Suppression tests with representative 6-year-old child in the following positions			
	Sitting on seat with back against seat back (S22.2.2.1)			
	Sitting on seat with back against reclined seat back (S22.2.2.2)			
	Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)			
	Sitting back in the seat and leaning on the right front passenger door (S24.2.3)			

21. Test of Reactivation of the Passenger Air Bag System with an Unbelted 5th percentile female dummy (S20.3, 22.3, S24.3). Perform this test after the following suppression tests: After each restraint.

22. Test of Reactivation of the passenger air bag system with a representative 5th percentile female (S20.3, 22.3, S24.3). Perform this test after the following suppression tests:

23. Low risk deployment test with 12-month-old dummy (Part 572, Subpart R) using the following indicated child restraints.

Section B

	Britax Handle with Care 191	Full Rearward	Mid Position	Full Forward
	Century Assura 4553	Full Rearward	Mid Position	Full Forward
	Century Avanta SE 41530	Full Rearward	Mid Position	Full Forward
	Century Smart Fit 4543	Full Rearward	Mid Position	Full Forward
	Cosco Arriva 02727	Full Rearward	Mid Position	Full Forward
	Cosco Opus 35 02603	Full Rearward	Mid Position	Full Forward
	Evenflo Discovery Adjust Right 212	Full Rearward	Mid Position	Full Forward
	Evenflo First Choice 204	Full Rearward	Mid Position	Full Forward
	Evenflo On My Way Position Right V 282	Full Rearward	Mid Position	Full Forward
	Graco Infant 8457	Full Rearward	Mid Position	Full Forward

Section C

	Britax Roundabout 161	Full Rearward	Mid Position	Full Forward
	Century Encore 4612	Full Rearward	Mid Position	Full Forward
	Century STE 1000 4416	Full Rearward	Mid Position	Full Forward
	Cosco Olympian 02803	Full Rearward	Mid Position	Full Forward
	Cosco Touriva 02519	Full Rearward	Mid Position	Full Forward
	Evenflo Horizon V 425	Full Rearward	Mid Position	Full Forward
	Evenflo Medallion 254	Full Rearward	Mid Position	Full Forward

- 24. Low risk deployment test with 3-year-old dummy (Part 572, Subpart P) in the following positions
 - Position 1
 - Position 2
- 25. Low risk deployment test with 6-year-old dummy (Part 572, Subpart N) in the following positions
 - Position 1
 - Position 2
- 26. Low risk deployment test with 5th percentile female dummy (Part 572, Subpart O) in the following positions
 - Position 1
 - Position 2
- 27. Impact Tests
 - Frontal Oblique – Test Speed:
 - Belted 50th male dummy driver and passenger (0 to 48 kmph) (S5.1.1(a))
 - Unbelted 50th male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a)(1))
 - Unbelted 50th male dummy driver and passenger (32 to 40 kmph) (S5.1.2(a) (1) or S5.1.2(b))
 - Frontal 0° - Test Speed: 39.8 kmph
 - Belted 50th male dummy driver (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a))
 - Belted 50th male dummy passenger (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a))
 - Belted 5th female dummy driver (0 to 48 kmph) (S16.1(a))
 - Belted 5th female dummy passenger (0 to 48 kmph) (S16.1(a))
 - Belted 50th male dummy driver and passenger (0 to 56 kmph) (S5.1.1.(b)(2))
 - Unbelted 50th male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a) (1))
 - Unbelted 50th male dummy driver (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b))
 - Unbelted 50th male dummy passenger (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b))
 - Unbelted 5th female dummy driver (32 to 40 kmph) (S16.1(b))
 - Unbelted 5th female dummy passenger (32 to 40 kmph) (S16.1(b))
 - 40% Offset 0° Belted 5th male dummy driver and passenger (0 to 40 kmph) (S18.1)
 - Test Speed:
- 28. Sled Test: Unbelted 50th male dummy driver and passenger (S13)
- 29. FMVSS 204 Indicant Test
- 30. FMVSS 212 Indicant Test
- 31. FMVSS 219 Indicant Test
- 32. FMVSS 301 Indicant Frontal Test

DATA SHEET 2
REPORT OF VEHICLE CONDITION

Test Vehicle: 2005 Toyota Highlander MPV NHTSA No.: C55107
Test Program: FMVSS 208 Compliance Test Dates: 4/26/05

CONTRACT NO. DTNH22- 03-D-11002 Date: 7/28/04
FROM (Lab and rep name): MGA Research Corporation
TO: NHTSA, OVSC (NVS-220)

PURPOSE: (X) Initial Receipt () Received via Transfer (X) Present vehicle condition

MODEL YEAR/MAKE/MODEL/BODY STYLE: 2005 Toyota Highlander MPV
MANUFACTURE DATE: 12/04
NHTSA NO. C55107 GVWR: 2430 kg (5360 lbs)
BODY COLOR: Super White GAWR (Fr): 1300 kg (2865 lbs)
VIN: JTEGP21A650062275 GAWR (Rr): 1340 kg (2950 lbs)

ODOMETER READINGS: ARRIVAL (miles): 69 DATE: 3/28/05
COMPLETION (miles): 71 DATE: 4/26/05

PURCHASE PRICE: (\$) 23,600

DEALER'S NAME: Wilde Toyota, INC; 3225 S. 108th Street; West Allis, WI 53227

- A. All options listed on window sticker are present on the test vehicle:
X Yes ___ No
- B. Tires and wheel rims are new and the same as listed: X Yes ___ No
- C. There are no dents or other interior or exterior flaws: X Yes ___ No
- D. The vehicle has been properly prepared and is in running condition:
X Yes ___ No
- E. Keyless remote is available and working: X Yes ___ No
- F. The glove box contains an owner's manual, warranty document, consumer information, and extra set of keys: X Yes ___ No
- G. Proper fuel filler cap is supplied on the test vehicle: X Yes ___ No
- H. Using permanent marker, identify vehicle with NHTSA number and FMVSS test type(s) on roof line above driver door or for school buses, place a placard with NHTSA number inside the windshield and to the exterior front and rear side of bus:
X Yes ___ No
- I. Place vehicle in storage area: X Yes ___ No
- J. Inspect the vehicle's interior and exterior, including all windows, seats, doors, etc. to confirm that each system is complete and functional per the manufacturer's specifications. Any damage, misadjustment, or other unusual condition that could influence the test program or test results shall be recorded. Report any abnormal condition to the NHTSA COTR before beginning any test:
X Vehicle OK ___ Conditions reported below

REPORT OF VEHICLE CONDITION AT THE COMPLETION OF TESTING

LIST OF FMVSS TESTS PERFORMED BY THIS LAB: FMVSS 208, 212, 219, 301

VEHICLE: 2005 Toyota Highlander MPV NHTSA NO. C55107

REMARKS:

Equipment that is no longer on the test vehicle as noted on previous page:

Tool and jack, trunk interior, right rear taillight

Explanation for equipment removal:

Components removed for instrumentation installation and to meet target weight.

Test Vehicle Condition:

25 mph frontal impact damage- front suspension & structure damaged, hood & front quarter panels damaged, radiator damaged, air bags & pretensioners deployed, Stoddard in fuel system

RECORDED BY: Jeff Lewandowski DATE: 4/26/2005

APPROVED BY: David Winkelbauer DATE: 4/26/2005

#####

RELEASE OF TEST VEHICLE

The vehicle described above is released from MGA to be delivered to:

Date: Time: Odometer:

Lab Rep's Signature:

Title:

Carrier/Customer Rep:

Date:

DATA SHEET 3

CERTIFICATION LABEL AND TIRE PLACARD INFORMATION

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Nick Kosinski

NHTSA No.: C55107
 Test Date: 4/26/05

Certification Label	
Manufacturer:	Toyota Motor Corp.
Date of Manufacture:	12/04
VIN:	JTEGP21A650062275
Vehicle Certified As (Pass. Car/MPV/Truck/Bus):	MPV
Front Axle GVWR:	1300 kg (2865 lbs)
Rear Axle GVWR:	1340 kg (2950 lbs)
Total GVWR:	2430 kg (5360 lbs)

Tire Placard	
Not applicable, vehicle is not a passenger car and does not have a tire placard.	MPV
This is not a passenger car, but all or part of this information is still contained on a vehicle label and is reported here.	MPV
Vehicle Capacity Weight:	390 kg (860 lbs)
Designated Seating Capacity Front:	2
Designated Seating Capacity Rear:	3
Total Designated Seating Capacity:	5
Recommended Cold Tire Inflation Pressure Front:	210 kpa (30 psi)
Recommended Cold Tire Inflation Pressure Rear:	210 kpa (30 psi)
Recommended Tire Size:	P225/70R16

Signature: *Nick Kosinski*

Date: 04/26/05

DATA SHEET 14

MARKING OF REFERENCE POINTS FOR VARIOUS TEST POSITIONS AND POINTS

Test Vehicle: 2005 Toyota Highlander MPV
Test Program: FMVSS 208 Compliance
Test Technician: Eric Peschman

NHTSA No.: C55107
Test Date: 4/26/05

1. Driver Designated Seating Position:

- 1.1 Position the seat's adjustable lumbar supports so that the lumbar supports are in the lowest, retracted or deflated adjustment positions. (S16.2.10.1)
 N/A – No lumbar adjustment
- 1.2 Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position (S16.2.10.2)
 N/A – No additional support adjustment
- 1.3 Mark a point (seat cushion reference point) on the side of the seat cushion that is between 150 mm and 250 mm from the front edge of the seat cushion.
- 1.4 Draw a line (seat cushion reference line) through the seat cushion reference point.
- 1.5 Using only the controls that primarily move the seat in the fore-aft direction, move the seat cushion reference point to the rearmost position.
- 1.6 If the seat cushion adjusts fore-aft, independent of the seat back, use only the controls that primarily move the seat cushion in the fore-aft direction to move the seat cushion reference point to the rearmost position (S16.2.10.3)
 N/A – No independent fore-aft seat cushion adjustment
- 1.7 Using any part of any control, other than the parts just used for fore-aft positioning, determine the range of angles of the seat cushion reference line and set the seat cushion reference line at the mid-angle.
 Maximum Angle: 7.3 Degrees, Nose Up
 Minimum Angle: 3.8 Degrees Nose Down
 Mid-angle: 1.8 Degrees, Nose Up
- 1.8 If the seat and/or seat cushion height is adjustable, use any part of any control other than those which primarily move the seat or seat cushion fore-aft, to put the seat cushion reference point in its lowest position with the seat cushion reference line angle at the mid-angle found in 1.7.
 N/A – No seat height adjustment
- 1.9 Using only the controls that primarily move the seat in the fore-aft direction, verify the seat is in the rearmost position.
- 1.10 Using only the controls that primarily move the seat in the fore-aft direction, mark for future reference the fore-aft seat positions. Mark each position so that there is a visual indication when the seat is at a particular position. For manual seats, move the seat forward one detent at a time and mark each detent. For power seats, mark only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost.
- 1.11 Use only the controls that primarily move the seat in the fore-aft direction to place the seat in the rearmost position.

- 1.12 Using any controls, other than the controls that primarily move the seat and/or seat cushion in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 1.7.
- 1.13 Using only the controls that primarily move the seat and/or seat cushion in the fore-aft direction, place the seat in the mid-fore-aft position.
- 1.14 Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 1.7.
- 1.15 Using only the controls that change the seat in the fore-aft direction, place the seat in the foremost position.
- 1.16 Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 1.7.
- 1.17 Visually mark for future reference the seat back angle, if adjustable, at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer.
- N/A – No seat back angle adjustment
- Manufacturer's design seat back angle: 3° on headrest post
- 1.18 Is the seat a bucket seat?
- Yes, go to 1.18.1 and skip 1.18.2
- No, go to 1.18.2 and skip 1.18.1
- 1.18.1 Bucket seats:
- Locate and mark for future reference the longitudinal centerline of the seat cushion. The longitudinal centerline of a bucket seat cushion is determined at the widest part of the seat cushion. Measure perpendicular to the longitudinal centerline of the vehicle. (S16.3.1.10)
- Record the width of the seat cushion: 525 mm
- One half the width of the seat cushion is: 262 mm
- Record the distance from the edge of the seat cushion to the seat mark: 262 mm
- 1.18.2 Bench seats:
- Locate and mark for future reference the longitudinal line on the seat cushion that marks the longitudinal vertical plane through the centerline of the steering wheel.
2. Passenger Designated Seating Position
- 2.1 Is the seat adjustable independent of the driver seating position?
- Yes, go to 2.2
- No, go to 2.18
- 2.2 Position the seat's adjustable lumbar supports so that the lumbar supports are in the lowest, retracted or deflated adjustment positions (S16.2.10.1, S20.1.9.1, S22.1.7.1)
- N/A – No lumbar adjustment
- 2.3 Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2, S20.1.9.2, S22.1.7.2)
- N/A – No additional support adjustment

- X** 2.4 Mark a point (seat cushion reference point) on the side of the seat cushion that is between 150 mm and 250 mm from the front edge of the seat cushion.
- X** 2.5 Draw a line (seat cushion reference line) through the seat cushion reference point.
- X** 2.6 Using only the controls that primarily move the seat in the fore-aft direction, move the seat cushion reference point to the rearmost position.
- X** 2.7 If the seat cushion adjusts fore-aft, independent of the seat back, use only the controls that primarily move the seat cushion in the fore-aft direction to move the seat cushion reference point to the rearmost position (S16.2.10.3, S20.1.9.3, S22.1.7.3)
- X** N/A – No independent fore-aft seat cushion adjustment.
- X** 2.8 Using any part of the control, other than the parts just used for fore-aft positioning, determine the range of angles of the seat cushion reference line and set the seat cushion reference line at the mid-angle.
- X** Maximum Angle: Zero Degrees
- X** Minimum Angle: Zero Degrees
- X** Mid-angle: Zero Degrees
- X** 2.9 If the seat and/or seat cushion height is adjustable, use any part of any control other than those which primarily move the seat or seat cushion fore-aft, to put the seat cushion reference point in its lowest position with the seat cushion reference line angle at the mid-range angle.
- X** N/A – No seat height adjustment
- X** 2.10 Using only the controls that primarily move the seat and/or seat cushion in the fore-aft direction, verify the seat is in the rearmost position.
- X** 2.11 Using only the controls that primarily move the seat in the fore-aft direction, mark for future reference the fore-aft seat positions. Mark each position so that there is a visual indication when the seat is at a particular position. For manual seats, move the seat forward one detent at a time and mark each detent. For power seats, mark only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost.
- X** 2.12 Using only the controls that primarily move the seat in the fore-aft direction, place the seat in the rearmost position.
- X** 2.13 Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 2.8.
- X** N/A – No seat height adjustment Go to 2.18
- X** 2.14 Using only the controls that primarily move the seat in the fore-aft direction, place the seat in the mid-fore-aft position.
- X** 2.15 Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 2.8.
- X** 2.16 Using only the controls that change the seat in the fore-aft direction, place the seat in the foremost position.
- X** 2.17 Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 2.8.

- 2.18 Visually mark for future reference the seat back angle, if adjustable, at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer.
- N/A – No seat back angle adjustment
 - N/A – The seat back angle adjustment is controlled by the setting of the driver seat back angle.
- Manufacturer's design seat back angle: 3° on headrest post
- Actual seat back angle: 3° on headrest post
- 2.19 Is the seat a bucket seat?
- Yes, go to 2.19.1 and skip 2.19.2
 - No, go to 2.19.2 and skip 2.19.1
- 2.19.1 Bucket seats:
- Locate and mark for future reference the longitudinal centerline of the seat cushion. (S20.2.1.3, S22.2.1.3) The longitudinal centerline of a bucket seat cushion is determined at the widest part of the seat cushion. Measure perpendicular to the longitudinal centerline of the vehicle. (S20.1.10)
- Record the width of the seat cushion: 525 mm
- One half the width of the seat cushion is: 262 mm
- Record the distance from the edge of the seat cushion to the longitudinal centerline of the seat cushion. (The vertical plane through this longitudinal centerline is Plane B for suppression.) 262 mm
- 2.19.2 Bench seats:
- Locate and mark for future reference the longitudinal centerline of the passenger seat cushion. The longitudinal centerline is the same distance from the longitudinal centerline of the vehicle as the center of the steering wheel. (S20.2.1.3, S22.2.1.3)
 - Record the distance from the longitudinal centerline of the vehicle to the center of the steering wheel:
 - Record the distance from the longitudinal centerline of the vehicle to the longitudinal centerline of the seat cushion. (The vertical plane through this longitudinal centerline is Plane B for suppression.)
3. Head Restraints
- N/A, vehicle contains automatic head restraints
 - N/A, there is no head restraint adjustment
- 3.1 Left outboard
- 3.1.1 Adjust the head restraint to its lowest position. (S16.3.4.2)
- 3.1.2 Any adjustment of the head restraint shall be used to position it full forward. For example, if it rotates, rotate it such that the head restraint extends as far forward as possible. **Mark** the foremost position.
- 3.1.3 Measure the vertical distance from the top most point of the head restraint to the bottom most point. Locate and **mark** a horizontal plane through the midpoint of this distance.
- Vertical height of head restraint (mm): 196
- Mid-point height (mm): 98
- 3.2 Right outboard
- 3.2.1 Adjust the head restraint to its lowest position. (S16.3.4.2)

- 3.2.2 Any adjustment of the head restraint shall be used to position it full forward. For example, if it rotates, rotate it such that the head restraint extends as far forward as possible. **Mark** the foremost position.
- 3.2.3 Measure the vertical distance from the top most point of the head restraint to the bottom most point. Locate and **mark** a horizontal plane through the midpoint of this distance.
 - Vertical height of head restraint (mm): 196
 - Mid-point height (mm): 98
- 4. Steering Wheel
- 4.1 Is the steering wheel adjustable up and down and/or in and out?
 - Yes, go to 4.2
 - No, this form is complete
- 4.2 Find and **mark** for future reference each up and down position. Label three of the positions with the following: H for highest, M for mid-position (if there is no mid-position, label the next lowest adjustment position), and L for lowest.
 - N/A, steering wheel is not adjustable up and down
- 4.3 Find and **mark** for future references each in and out position. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the next rearmost adjustment position), and R for rearmost.
 - N/A, steering wheel is not adjustable in and out
- 5. Driver Low Risk Deployment
 - N/A, no low risk deployment tests scheduled
- 5.1 Position the steering wheel so the front wheels are in the straight-ahead position. (S26.2.1)
- 5.2 Position any adjustable parts of the steering controls to the mid-position as determined in item 3 above. If a mid-position adjustment is not achievable, position the controls to the next lowest detent position. (S26.2.1)
- 5.3 Locate the vertical plane parallel to the vehicle longitudinal centerline through the geometric center of the opening through which the driver air bag deploys into the occupant compartment. This is referred to as "Plane E". (Check determination method below.) (S26.2.6)
 - Plane E determined using manufacturer's information supplied by the COTR .
 - Plane E determined by test lab personnel and approved by the COTR. (Include supporting documentation in the test report.)

	Ey (mm)
"Plane E" Measurement::	
Measured:	
Specified:	
Verify Measured Equals Specified +/- 6mm:	

- 5.4 Locate the horizontal plane through the highest point of the air bag module cover. This is referred to as "Plane F." (Check determination method below.) (S26.2.6)
- Plane F determined using manufacturer's information supplied by the COTR .
 - Plane F determined by test lab personnel and approved by the COTR. (Include supporting documentation in the test report.)

	Fz (mm)
"Plane F" Measurement::	
Measured:	
Specified:	
Verify Measured Equals Specified +/- 6mm:	

6. Passenger Low Risk Deployment – Planes C and D

N/A, no low risk deployment tests scheduled

- 6.1 Locate the horizontal plane through the geometric center of the opening through which the right front air bag deploys into the occupant compartment. This is referred to as "Plane C." (Check location method below.) (S22.4.1.3)

- Plane C located using manufacturer's information supplied by the COTR. (Include manufacturer's information in the test report.) OR
- Plane C located by test lab personnel and approved by the COTR. (Include supporting documentation in the test report.)

	Cz (mm)
"Plane C" Measurement::	
Measured:	
Specified:	
Verify Measured Equals Specified +/- 6mm:	

- 6.2 Locate the vertical plane parallel to the vehicle longitudinal centerline through the geometric center of the opening through which the right front air bag deploys into the occupant compartment. This is referred to as "Plane D." (Check determination method below.) (S22.4.1.2)

- Plane D determined using manufacturer's information supplied by the COTR. (Include manufacturer's information in the test report.) OR
- Plane D determined by test lab personnel and approved by the COTR. (Include supporting documentation in the test report.)

	Dy (mm)
"Plane D" Measurement:	
Measured:	
Specified:	
Verify Measured Equals Specified +/- 6mm:	

- 6.3 **Mark** the intersection of Planes C and D on the instrument panel.

7. 5th Female Dummy
 Mark a point on the chin of the dummy 40 mm below the center of the mouth. (Chin Point) (S26.2.6)

8. 6-Year-Old Dummy
 Locate and **mark** a point on the front of the dummy's chest jacket on the midsagittal plane which is 139 mm (5.5 in) ± 3 mm (± 0.1 in) along the surface of the skin down from the top of the skin at the neck line. Designate this point as "Point 1." (S24.4.1.1)

"Point 1" measurement (mm):



9. 3-Year-Old Dummy

Locate and **mark** a point on the front of the dummy's chest jacket on the midsagittal plane which is 114 mm (4.5 in) \pm 3 mm (\pm 0.1 in) along the surface of the skin down from the top of the skin at the neck line. Designate this point as "Point 1." (S22.4.1.1)



"Point 1" measurement (mm +/- 3 mm):

REMARKS:

I certify that I have read and performed each instruction.

Signature:

Eiv Leard

Date: 04/26/05

DATA SHEET 30
VEHICLE WEIGHT, FUEL TANK, AND ATTITUDE DATA

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Jamie Aide

NHTSA No.: C55107
 Test Date: 4/26/05

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	<input checked="" type="checkbox"/> 32 to 40 kmph	<input type="checkbox"/> 0 to 48 kmph	<input type="checkbox"/> 0 to 56 kmph
DRIVER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	
PASSENGER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	

- 1. Fill the transmission with transmission fluid to the satisfactory range.
- 2. Drain fuel from vehicle
- 3. Run the engine until fuel remaining in the fuel delivery system is used and the engine stops.
- 4. Record the useable fuel tank capacity supplied by the COTR
Useable Fuel Tank Capacity supplied by COTR: 72.5 liters (19.2 gallons)
- 5. Record the fuel tank capacity supplied in the owner’s manual.
Useable Fuel Tank Capacity in owner’s manual: 72.5 liters (19.2 gallons)
- 6. Using purple dyed Stoddard solvent having the physical and chemical properties of Type 1 solvent or cleaning fluid, Table 1, ASTM Standard D484-71, “Standard Specifications for Hydrocarbon Dry-cleaning Solvents,” or gasoline, fill the fuel tank.
Amount Added: 72.5 liters (19.2 gallons)
- 7. Fill the coolant system to capacity.
- 8. Fill the engine with motor oil to the Max. mark on the dip stick.
- 9. Fill the brake reservoir with brake fluid to its normal level.
- 10. Fill the windshield washer reservoir to capacity.
- 11. Inflate the tires to the tire pressure on the tire placard. If no tire placard is available, inflate the tires to the recommended pressure in the owner’s manual.

Tire placard pressure:	RF:	30 psi	LF:	30 psi	RR:	30 psi	LR:	30 psi
Owner’s manual pressure:	RF:	30 psi	LF:	30 psi	RR:	30 psi	LR:	30 psi
Actual inflated pressure:	RF:	30 psi	LF:	30 psi	RR:	30 psi	LR:	30 psi

- 12. Record the vehicle weight at each wheel to determine the unloaded vehicle weight (UVW), i.e. “as delivered” weight).

Right Front (kg):	483.1	Right Rear (kg):	345.2
Left Front (kg):	501.2	Left Rear (kg):	345.6
Total Front (kg):	984.3	Total Rear (kg):	690.8
% Total Weight:	58.8	% Total Weight:	41.2
UVW = TOTAL FRONT PLUS TOTAL REAR (KG):		1675.1	

- 13. UVW Test Vehicle Attitude: (All dimensions in millimeters)
- 13.1 Mark a point on the vehicle above the center of each wheel.
- 13.2 Place the vehicle on a level surface.

- 13.3 Measure perpendicular to the level surface to the 4 points marked on the body and record the measurements

RF:	797	LF:	792	RR:	805	LR:	802
-----	-----	-----	-----	-----	-----	-----	-----

14. Calculate the Rated Cargo and Luggage Weight (RCLW): 50 kg
- 14.1 Does the vehicle have the vehicle capacity weight (VCW) on the certification label or tire placard?
- Yes, go to 14.3
- No, go to 14.2
- 14.2 VCW = Gross Vehicle Weight – UVW

$$VCW = \text{---} - \text{---} = \text{---}$$

- 14.3 VCW = 390 kg (860 lbs)
- 14.4 Does the certification or tire placard contain the Designated Seating Capacity (DSC)?
- Yes, go to 14.6
- No, go to 14.5 and skip 14.6

14.5 DSC = Total number of seat belt assemblies = _____

14.6 DSC = 5

14.7 RCLW = VCW – (68 kg x DSC) = 390 kg - (68 kg x 5) = 50 kg

- 14.8 Is the vehicle certified as a truck, MPV or bus (see the certification label on the door jamb)?
- Yes, if the calculated RCLW is greater than 136 kg, use 136 kg as the RCLW. (S8.1.1)
- No, use the RCLW calculated in 14.7

15. Fully Loaded Weight (100% fuel fill): 1833.4 kg

15.1 Place the appropriate test dummy in both front outboard seating positions.

Driver: 5th female ___ 50th male
 Passenger: 5th female ___ 50th male

- 15.2 Load the vehicle with the RCLW from 14.7 or 14.8 whichever is applicable.
- 15.3 Place the RCLW in the cargo area. Center the load over the longitudinal centerline of the vehicle. (S8.1.1 (d))
- 15.4 Record the vehicle weight at each wheel to determine the Fully Loaded Weight.

Right Front (kg):	518.0	Right Rear (kg):	396.9
Left Front (kg):	525.7	Left Rear (kg):	392.8
Total Front (kg):	1043.7	Total Rear (kg):	789.7
% Total Weight:	56.9	% Total Weight:	43.1
% GVW	53.5	% GVW	55.1
Fully Loaded Weight = Total Front Plus Total Rear (kg):		1833.4	

16. Fully Loaded Test Vehicle Attitude: (All dimensions in millimeters)

16.1 Place the vehicle on a level surface.

16.2 Measure perpendicular to the level surface to the 4 points marked on the body (see 13.1 above) and record the measurements

RF:	786	LF:	784	RR:	787	LR:	787
-----	-----	-----	-----	-----	-----	-----	-----

- 17. Drain the fuel system
- 18. Using purple dyed Stoddard solvent having the physical and chemical properties of Type 1 solvent or cleaning fluid, Table 1, ASTM Standard D484-71, "Standard Specifications for Hydrocarbon Dry-cleaning Solvents," fill the fuel tank to 92 - 94 percent of useable capacity.
- Fuel tank capacity x .94 = 72.5 liters (19.2 gallons) x .94 = 68.1 liters (18.0 gallons)
- Amount added 68.1 liters (18.0 gallons) 94%
- 19. Crank the engine to fill the fuel delivery system with Stoddard solvent
- 20. Calculate the test weight range.
- 20.1 Calculated Weight = UVW (see 12 above) + RCLW (see 14 above) + 2x(dummy weight)

1823.1 kg = 1675.1 kg + 50.0 kg + 98.0 kg

- 20.2 Test Weight Range = Calculated Weight (- 4.5 kg, - 9 kg.)
 Max. Test Weight = Calculated Test Weight – 4.5 kg = 1818.6 kg
 Min. Test Weight = Calculated Test Weight – 9 kg = 1814.1 kg

- 21. Remove the RCLW from the cargo area.
- 22. Drain transmission fluid, engine coolant, motor oil, and windshield washer fluid from the test vehicle so that Stoddard solvent leakage from the fuel system will be evident.

- 23. Vehicle Components Removed For Weight Reduction:
Tool and jack, trunk interior, right rear taillight

- 24. Secure the equipment and ballast in the load carrying area and distribute it, as nearly as possible, to obtain the proportion of axle weight indicated by the gross axle weight ratings and center it over the longitudinal centerline of the vehicle.

- 25. If necessary, add ballast to achieve the actual test weight.

N/A

Weight of Ballast: 20.4 kg

- 26. Ballast, including test equipment, must be contained so that it will not shift during the impact event or interfere with data collection or interfere with high-speed film recordings or affect the structural integrity of the vehicle or do anything else to affect test results. Care must be taken to assure that any attachment hardware added to the vehicle is not in the vicinity of the fuel tank or lines.

- 27. Record the vehicle weight at each wheel to determine the actual test weight.

Right Front (kg):	496.2	Right Rear (kg):	391.0
Left Front (kg):	529.4	Left Rear (kg):	397.8
Total Front (kg):	1025.6	Total Rear (kg):	788.8
% Total Weight:	56.5	% Total Weight:	43.5
% GVW	53.5	% GVW	55.1
(% GVW = Axle GVW divided by Vehicle GVW)			
TOTAL FRONT PLUS TOTAL REAR (kg):			1814.4

- 28. Is the test weight between the Max. Weight and the Min. Weight (See 20.2)?

Yes

No, explain why not.

- 29. Test Weight Vehicle Attitude: (all dimensions in millimeters)

- 29.1 Place the vehicle on a level surface

- 29.2 Measure perpendicular to the level surface to the 4 points marked on the body (see 13 above) and record the measurements

RF:	793	LF:	787	RR:	793	LR:	788
-----	-----	-----	-----	-----	-----	-----	-----

30. Summary of test attitude

- 30.1 AS DELIVERED:

RF:	797	LF:	792	RR:	805	LR:	802
-----	-----	-----	-----	-----	-----	-----	-----

AS TESTED:

RF:	793	LF:	787	RR:	793	LR:	788
-----	-----	-----	-----	-----	-----	-----	-----

FULLY LOADED:

RF:	786	LF:	784	RR:	787	LR:	787
-----	-----	-----	-----	-----	-----	-----	-----

- 30.2 Is the "as tested" test attitude equal to or between the "fully loaded" and "as delivered" attitude?

- Yes
 No, explain why not.

I certify that I have read and performed each instruction.

Signature:



Date:

04/26/05

DATA SHEET 31

VEHICLE ACCELEROMETER LOCATION AND MEASUREMENT

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Nick Kosinski

NHTSA No.: C55107
 Test Date: 4/26/05

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	X 32 to 40 kmph	0 to 48 kmph	0 to 56 kmph
DRIVER DUMMY:	X 5 TH female	50 th Male	
PASSENGER DUMMY:	X 5 TH female	50 th Male	

1. Find the location where the vertical plane parallel to the longitudinal centerline of the vehicle and through the center of the left front outboard seating position intersects the left rear seat cross member. Install an accelerometer at this intersection on the rear seat cross member to record x-direction accelerations. Record the location on the following chart.
2. Find the location where the vertical plane parallel to the longitudinal centerline of the vehicle and through the center of the right front outboard seating position intersects the right rear seat cross member. Install an accelerometer at this intersection on the rear seat cross member to record x-direction accelerations. Record the location on the following chart.
3. Find the location where a vertical plane through the longitudinal centerline of the vehicle and a vertical transverse plane through the center of the two wheels on opposite sides of the engine intersect at the top of the engine. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
4. Find the location where a vertical plane through the longitudinal centerline of the vehicle and a vertical transverse plane through the center of the two wheels on opposite sides of the engine intersect the bottom of the engine. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
5. Install an accelerometer on the right front brake caliper to record x-direction accelerations. Record the location on the following chart.
6. Find the location where a vertical plane through the longitudinal centerline of the vehicle intersects the top of the instrument panel. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
7. Install an accelerometer on the left front brake caliper to record x-direction accelerations. Record the location on the following chart.
8. Find the location where a vertical plane through the longitudinal centerline of the vehicle intersects the floor of the trunk. Install an accelerometer on the trunk floor at this intersection to record z-direction accelerations. Record the location on the following chart.


REMARKS:

I certify that I have read and performed each instruction.

Signature: *Nick Kosinski* Date: 04/26/05


VEHICLE ACCELEROMETER LOCATION AND DATA SUMMARY

CENTERLINE OF FRONT WHEELS

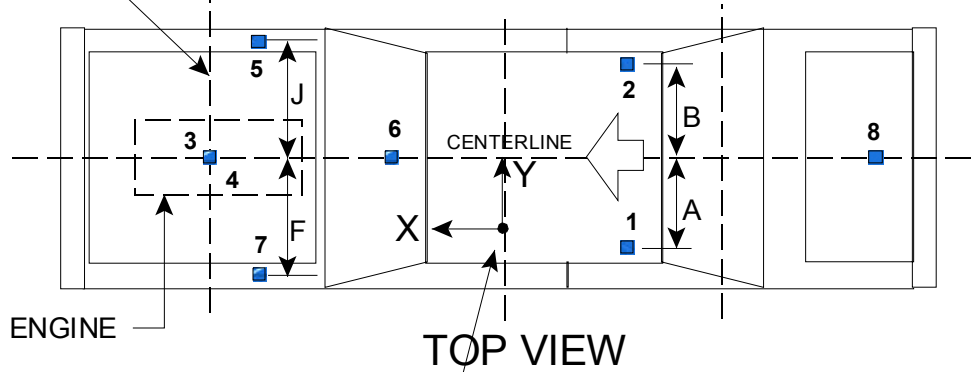

ACCELEROMETER COORDINATE SYSTEM (POSITIVE DIRECTION SHOWN)

REAR SEAT CUSHION ASSY. FRONT ATTACHMENT BRACKET SUPPORT

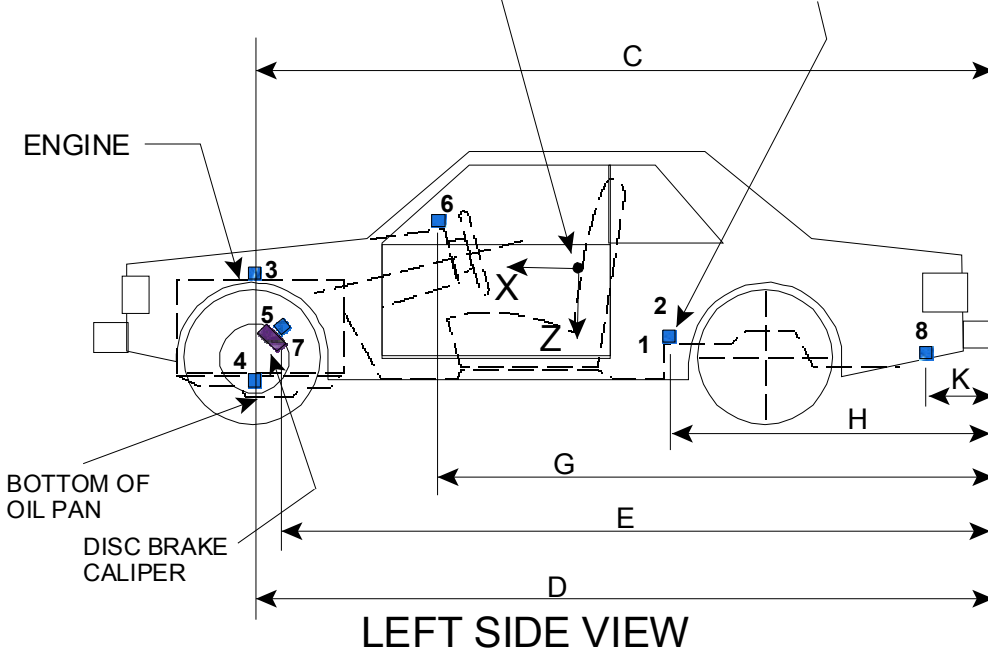

Dimensions Corresponding To The Letters "A" Through "K" (Excluding "I") Are Recorded In The Table On The Following Page.
Accelerometers Corresponding To The Numbers 1 Through 8 Are Specified On The Preceding Page.

DATA SHEET 31
VEHICLE ACCELEROMETER LOCATION AND MEASUREMENTS

<u>DIMENSION</u>	<u>LENGTH (mm)</u>	
PRETEST VALUES		
<u>A</u> (LH Rear Seat Xmbr)	483	
<u>B</u> (RH Rear Seat Xmbr)	482	
<u>C</u> (Engine Top)	4027	
<u>D</u> (Engine Bottom)	3996	
<u>E</u> (Caliper)	Right Side 3885	Left Side 3899
<u>F</u> (Left Caliper)	725	
<u>G</u> (IP)	3056	
<u>H</u> (Seat)	1884	
<u>J</u> (Right Caliper)	720	
<u>K</u> (Trunk)	976	
POST TEST VALUES		
<u>A</u> (LH Rear Seat Xmbr)	483	
<u>B</u> (RH Rear Seat Xmbr)	482	
<u>C</u> (Engine Top)	3995	
<u>D</u> (Engine Bottom)	3971	
<u>E</u> (Caliper)	Right Side 3848	Left Side 3866
<u>F</u> (Left Caliper)	660	
<u>G</u> (IP)	3041	
<u>H</u> (Seat)	1876	
<u>J</u> (Right Caliper)	675	
<u>K</u> (Trunk)	973	

DATA SHEET 32
PHOTOGRAPHIC TARGETS



Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Nick Kosinski

NHTSA No.: C55107
 Test Date: 4/26/05

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	<input checked="" type="checkbox"/> 32 to 40 kmph	<input type="checkbox"/> 0 to 48 kmph	<input type="checkbox"/> 0 to 56 kmph
DRIVER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	
PASSENGER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	

- 1. FMVSS 208 vehicle targeting requirements (See Figures 28A and 28B)
- 1.1 Targets A1 and A2 are on flat rectangular panels.
- 1.2 Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted at the front on the outboard sides of A1 and A2. The center of each circular target is 100 mm from the one next to it.
 - Distance between targets (mm): 100 mm
- 1.3 Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted at the back on the outboard sides of on A1 and A2. The center of each circular target is 100 mm from the one next to it.
 - Distance between targets (mm): 100 mm
- 1.4 The distance between the first circular target at the front of A1 and A2 and the last circular target at the back of A1 and A2 is at least 915 mm.
 - Distance between the first and last circular targets (mm): 915 mm
- 1.5 Firmly fix target A1 on the vehicle roof in the vertical longitudinal plane that is coincident with the midsagittal plane of the driver dummy.
- 1.6 Firmly fix target A2 on the vehicle roof in the vertical longitudinal plane that is coincident with the midsagittal plane of the passenger dummy.
- 1.7 Two circular targets (C1 and C2) at least 90 mm in diameter and with black and yellow quadrants are mounted on the outside of the driver door. The centers of each circular target are at least 610 mm apart.
 - Distance between targets (mm): 614 mm
- 1.8 Two circular targets (C1 and C2) at least 90 mm in diameter and with black and yellow quadrants are mounted on the outside of the passenger door. The centers of each circular target are at least 610 mm apart.
 - Distance between targets (mm): 614 mm
- 1.9 Place tape with squares having alternating colors on the top portion of the steering wheel.
- 1.10 Chalk the bottom portion of the steering wheel
- 1.11 Is this an offset test?
 - Yes, continue with this section
 - No, go to 2.
- 1.12 Measure the width of the vehicle.
 - Vehicle width (mm):

- 1.13 Find the centerline of the vehicle. ($\frac{1}{2}$ of the vehicle width)
- 1.14 Find the line parallel to the centerline of the vehicle and 0.1 x vehicle width from the centerline of the vehicle.
- 1.15 Apply 25 mm wide tape with alternating black and yellow squares parallel to and on each side of the line found in 1.14. The edge of each tape shall be 50 mm from the line found in 1.14. The tape shall extend from the bottom of the bumper to the front edge of the windshield. (Figure 28D)
2. Barrier Targeting
- 2.1 Fix two stationary targets D1 and D2 to the barrier as shown in the Figure 28A. One target is in the vertical longitudinal plane that is coincident with the midsagittal plane of the driver dummy. The other is in the vertical longitudinal plane that is coincident with the midsagittal plane of the passenger dummy
- 2.2 Targets D1 and D2 are on a rectangular panel.
- 2.3 Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted on the sides of the rectangular panel away from the longitudinal centerline of the vehicle. The center of each circular target is 100 mm from the one next to it.
- Distance between circular targets on D1 (mm): 100mm
- Distance between circular targets on D2 (mm): 100mm
3. FMVSS 208 Dummy Targeting Requirements
- 3.1 Place a circular target with black and yellow quadrants on both sides of the driver dummy head as close as possible to the center of gravity of the head in the x and z direction (relative to the measuring directions of the accelerometers).
- 3.2 Place a circular target with black and yellow quadrants on both sides of the passenger dummy head as close as possible to the center of gravity of the head in the x and z direction (relative to the measuring directions of the accelerometers).
- 3.3 Place a circular target with black and yellow quadrants on the outboard shoulder of the driver dummy. Place the target as high up on the arm as possible at the intersection of the arm and shoulder. The sleeve of the shirt on the dummy may be cut to make the target visible, but do not remove any material.
- 3.4 Place a circular target with black and yellow quadrants on the outboard shoulder of the passenger dummy. Place the target as high up on the arm as possible at the intersection of the arm and shoulder. The sleeve of the shirt on the dummy may be cut to make the target visible, but do not remove any material.
4. FMVSS 204 Targeting Requirements
- 4.1 Is an FMVSS 204 indicant test ordered on the "COTR Vehicle Work Order?"
- Yes, continue with this form.
- No, this form is complete. (Removed at manufacturer's request with COTR approval)
- 4.2 Resection panel (Figure 28C)
- 4.2.1 The panel deviates no more than 6 mm from perfect flatness when suspended vertically
- 4.2.2 The 8 targets on the panel are circular targets at least 90 mm in diameter and with black and yellow quadrants.
- 4.2.3 The center of each of the 4 outer targets are placed within 1 mm of the corners of a square measuring 914 mm on each side.
- 4.2.4 Locate another square with 228 mm sides and with the center of this square coincident with the center of the 914 mm square.
- 4.2.5 The center of the 4 inner targets are placed at the midpoints of each of the 228 mm sides.

-  4.3 Place a circular target at least 90 mm in diameter and with black and yellow quadrants on a material (cardboard, metal, etc.) that can be taped to the top of the steering column.
-  4.4 Tape the target from 4.3 to the top of the steering column in a manner that does not interfere with the movement of the steering column in a crash


REMARKS:

I certify that I have read and performed each instruction.


Signature: *Nick Kosinski*

Date: 04/26/05


REFERENCE PHOTO TARGETS

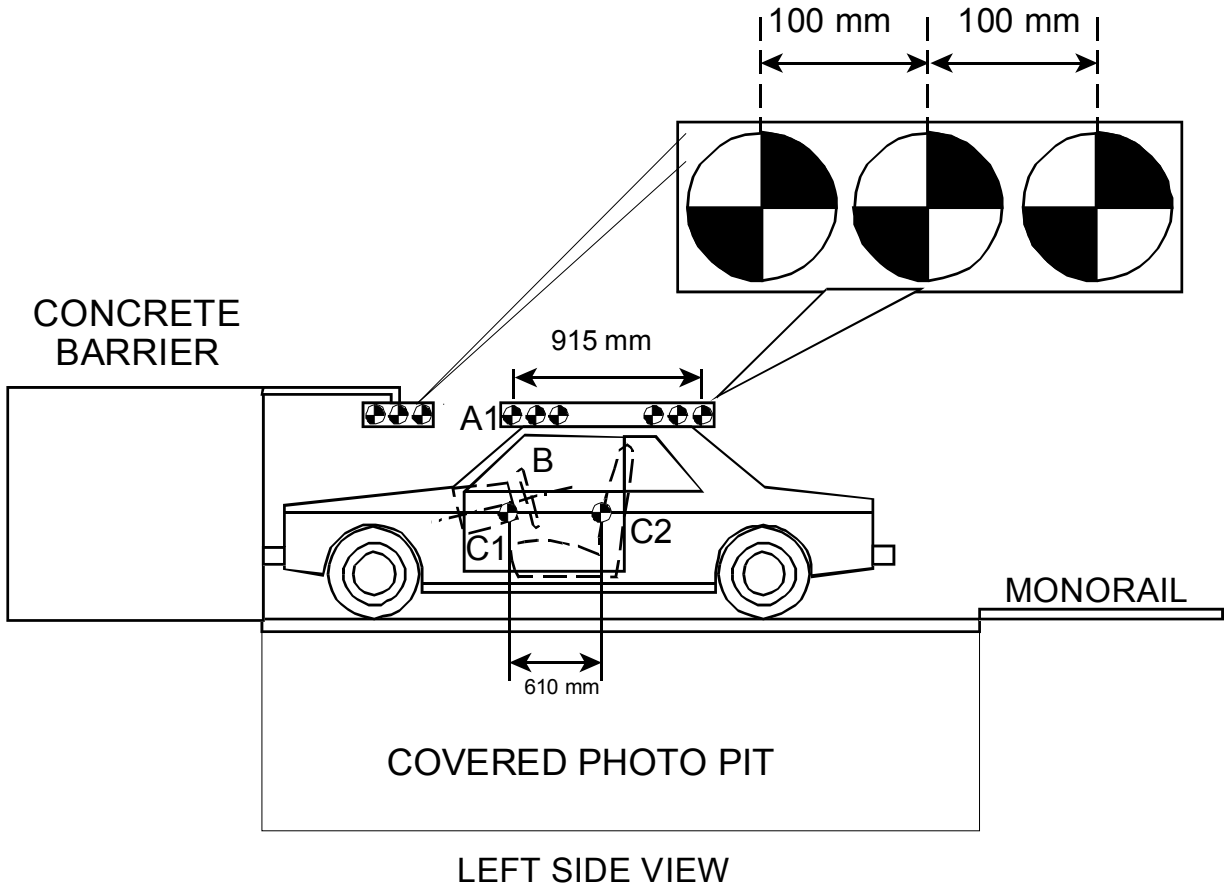


RESECTION PANEL TARGETING ALIGNMENT

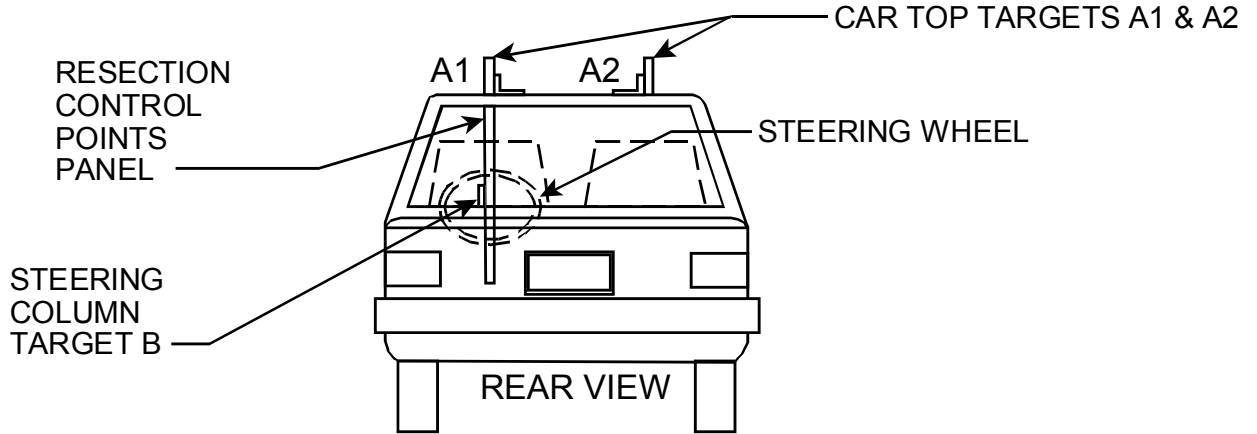

TEST RUN STEERING COLUMN CAMERA VIEW OF TYPICAL TIME ZERO VEHICLE POSITION

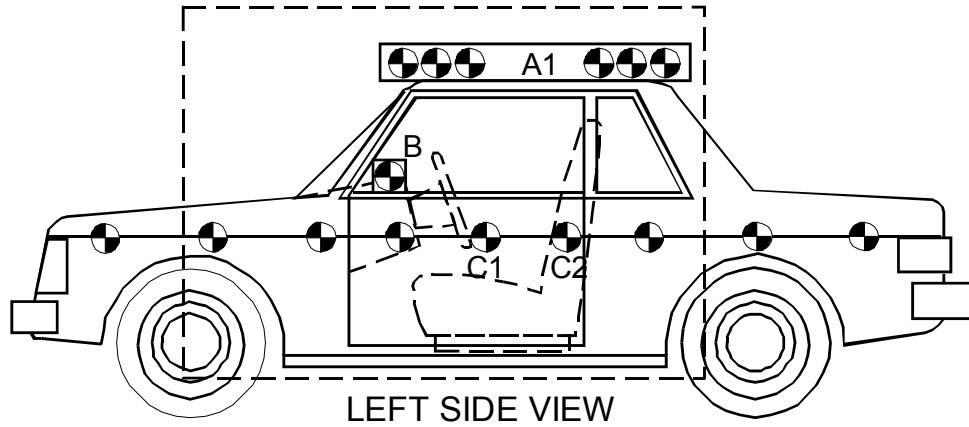

PRE-RUN STEERING COLUMN HIGH SPEED CAMERA VIEW

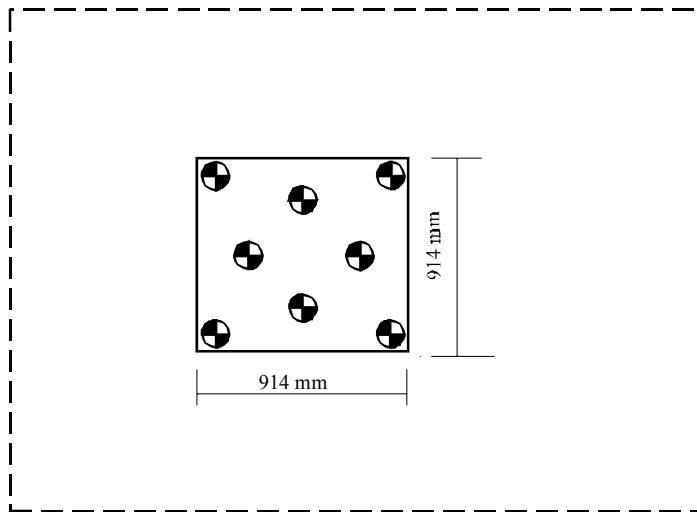

LEFT SIDE VIEW

DATA SHEET 33
CAMERA LOCATIONS

Test Vehicle: 2005 Toyota Highlander MPV
Test Program: FMVSS 208 Compliance


NHTSA No.: C55107
Test Date: 4/26/05
Time: 11:30 am

CAMERA NO.	VIEW	CAMERA POSITIONS (mm) *			LENS (mm)	SPEED (fps)
		X	Y	Z		
1	Real Time Left Side View				13	24
2	Left Side View (Barrier face to front seat backs)	1055	-5415	1460	24	1000
3	Left Side View (Driver)	1705	-7010	1535	35	1000
4	Left Side View (B-post aimed toward center of steering wheel)	6635	-5340	2250	50	1000
5	Left Side View (Steering Column)	2230	-6140	1555	19	1000
6	Left Side View (Steering Column)	2205	-6105	1025	19	1000
7	Right Side View (Overall)	2170	8455	1500	25	1000
8	Right Side View (Passenger)	1650	9205	1495	50	1000
9	Right Side View (Angle)	6545	5290	2300	50	1000
10	Right Side View (Front door)	1140	5160	1365	24	1000
11	Front View Windshield	-590	0	2760	19	1000
12	Front View Driver	-240	-370	2130	12.5	1000
13	Front View Passenger	-74	515	2065	12.5	1000
14	Overhead Barrier Impact View	650	0	5050	19	1000
15	Pit Camera Engine View	975	0	-3150	24	1000
16	Pit Camera Fuel Tank View	3010	0	-3150	24	1000

*COORDINATES:

- +X – forward of impact plane
- +Y – right of monorail centerline
- +Z – above ground level

CAMERA POSITIONS FOR FMVSS 208

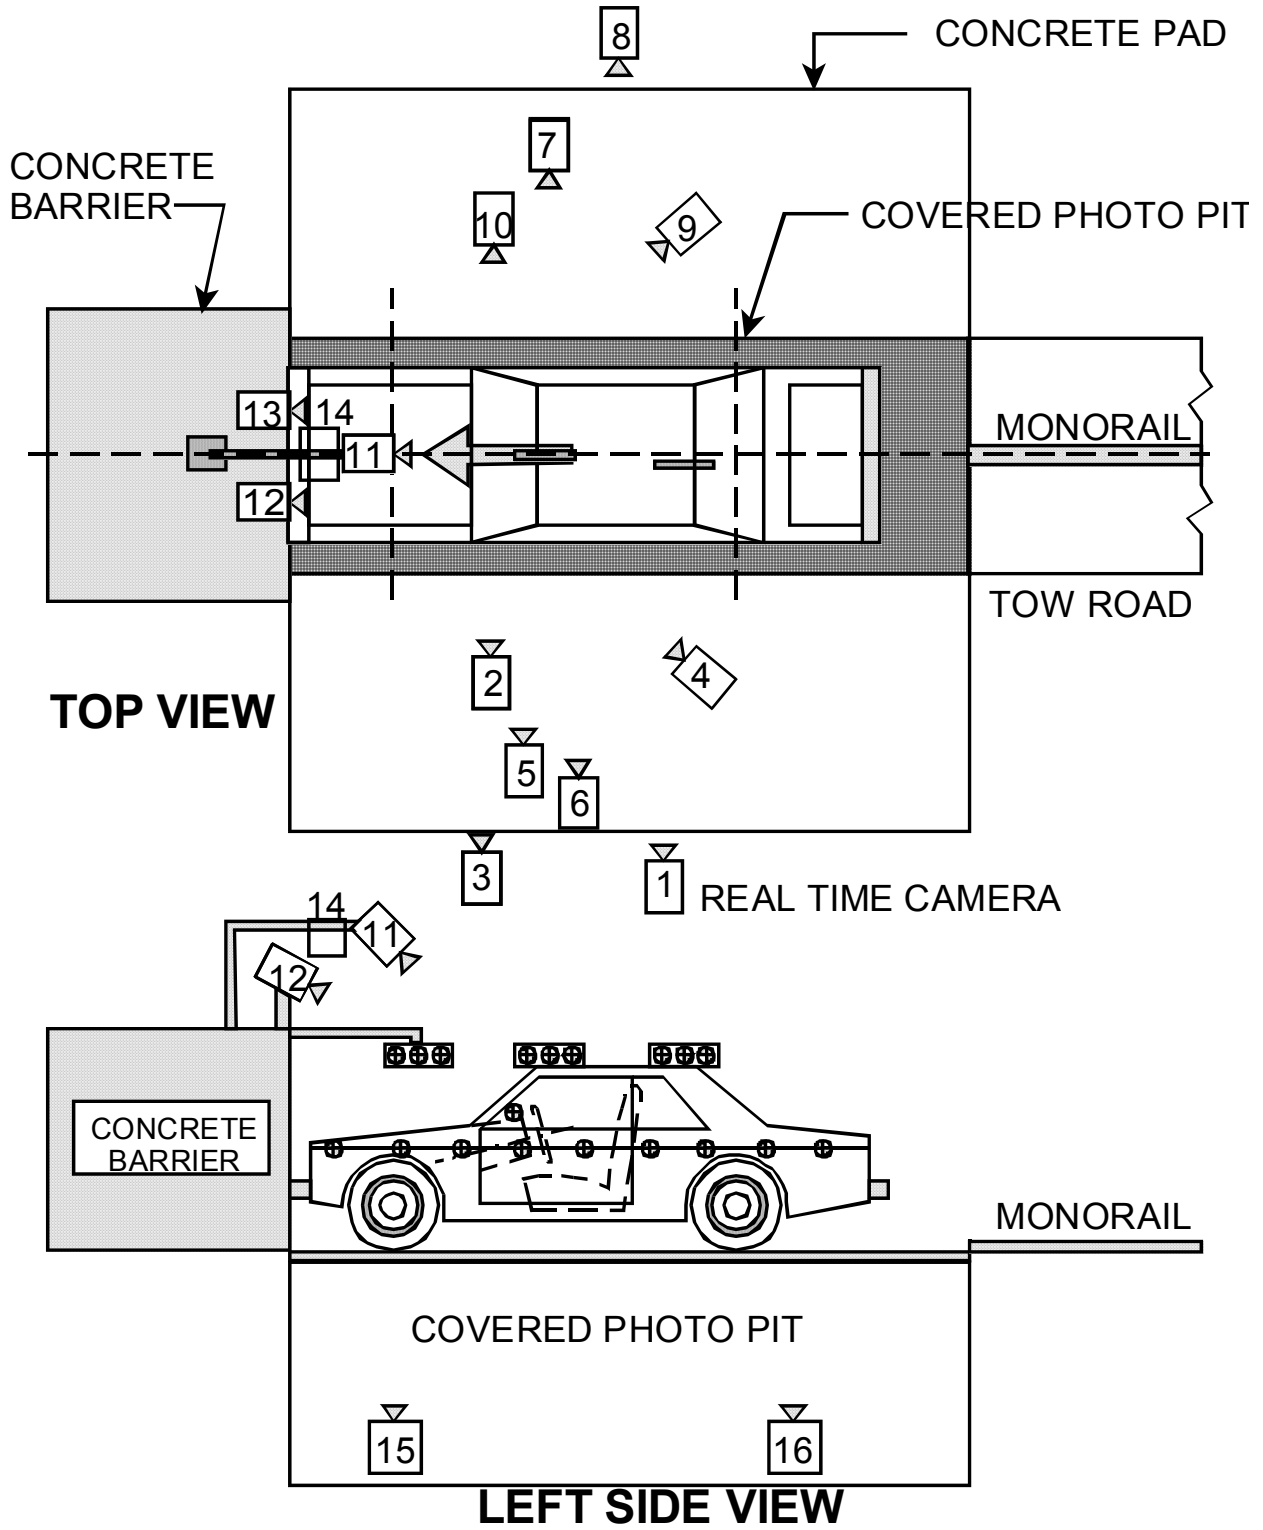

DATA SHEET 34

APPENDIX G DUMMY POSITIONING PROCEDURES FOR 5th% DRIVER TEST DUMMY CONFORMING TO SUBPART O OF PART 572

Test Vehicle: <u>2005 Toyota Highlander MPV</u>	NHTSA No.: <u>C55107</u>
Test Program: <u>FMVSS 208 Compliance</u>	Test Date: <u>4/26/05</u>
Test Technician: <u>Eric Peschman</u>	

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	<input checked="" type="checkbox"/> 32 to 40 kmph	<input type="checkbox"/> 0 to 48 kmph	<input type="checkbox"/> 0 to 56 kmph
DRIVER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	
PASSENGER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	

- X 1. Position the seat's adjustable lumbar supports so that the lumbar supports are in the lowest, retracted or deflated adjustment position. (S16.2.10.1)
 N/A – No lumbar adjustment

- X 2. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)
 N/A – No additional support adjustment

- X 3. If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1)
 N/A – No independent fore-aft seat cushion adjustment

- X 4. Use the seat markings determined during the completion of Data Sheet 14 to set the rearmost fore-aft position, mid-height position and the seat cushion mid-angle. (S16.3.2.1.1)

- X 5. If the vehicle has an adjustable accelerator pedal, place it in the full forward position. (S16.3.2.2.1)
 N/A accelerator pedal not adjustable

- X 6. Set the steering wheel hub at the geometric center of the full range of driving positions including any telescoping positions as determined in data sheet 14. (S16.2.9)

- X 7. Fully recline the seat back. (S16.3.2.1.2)
 N/A seat back not adjustable.

- X 8. Place the dummy in the seat with the legs at an angle of 120 degrees to the thighs. The calves should not be touching the seat cushion. (S16.3.2.1.2)

- X 9. Position the dummy in the seat such that the midsagittal plane is coincident with the longitudinal seat cushion markings as determined in item 1.18 of Data Sheet 14 (S16.3.2.1.3 and S16.3.2.1.4)

- X 10. Hold down the dummy's thighs and push rearward on the upper torso to maximize the pelvic angle. (S16.3.2.1.5)

- X 11. Set the angle between the legs and the thighs to 120 degrees. (S16.3.2.1.6)

12. Set the transverse distance between the centers of the front of the knees at 160 to 170 mm. (6.3 to 6.7 inches) Center the knee separation with respect to the longitudinal seat cushion marking as determined in item 1.18 of Data Sheet 14. (S16.3.2.1.6)
Record Knee Separation 170 mm
13. Push rearward on the dummy's knees until the pelvis contacts the seat back, or the backs of the calves contact the seat cushion, whichever occurs first. (S16.3.2.1.6)
 Pelvis contacted seat back.
 Calves contacted seat cushion.
14. Gently rock the upper torso ± 5 degrees (approximately 51 mm (2 inches)) side to side three time. (S16.3.2.1.7)
15. If needed, extend the legs until the feet do not contact the floor pan. The thighs should be resting on the seat cushion. (S16.3.2.1.8)
16. Position the right foot until the foot is in line with a longitudinal vertical plane passing through the center of the accelerator pedal. Maintain the leg and thigh in a vertical plane. (S16.3.2.1.8)
17. Rotate the left leg and thigh laterally to equalize the distance between each knee and the longitudinal seat cushion marking as determined in item 1.18 of Data Sheet 14. (S16.3.2.1.8)
18. Attempt to return the seat to the foremost fore-aft position, mid-height, and seat cushion mid-angle. The foot may contact and depress the accelerator and/or change the angle of the foot with respect to the leg. (S16.3.2.1.8)
 Foremost position achieved. Proceed to step 23.
 Foremost not achieved because of foot interference. Proceed to step 20.
 Foremost not achieved because of steering wheel contact.
19. If the dummy's legs contact the steering wheel, move the steering wheel up the minimum amount required to avoid contact. If the steering wheel is not adjustable separate the knees the minimum required to avoid contact. (S16.3.2.1.8)
 N/A- there was no leg contact
 Steering wheel repositioned
 Knees separated
20. If the left foot interferes with the clutch or brake pedals, rotate the left foot about the leg to provide clearance. If this is not sufficient, rotate the thigh outboard at the hip the minimum amount required for clearance. (S16.3.2.1.8)
 N/A, No foot interference with pedals.
 Foot adjusted to provide clearance.
 Foot and Thigh adjusted to provide clearance.

21. Continue to move the seat. Use seat controls to line up the seat markings determined during the completion of Data Sheet 14 to set the foremost fore-aft position, mid-height position and the seat cushion mid-angle. If the dummy contacts the interior move the seat rearward until a maximum clearance of 5 mm (0.2 inches) is achieved or the seat is in the closest detent position that does not cause dummy contact. (S16.3.2.1.8)

 Foremost, mid-height position and the seat cushion mid-angle reached

 Dummy contact. Clearance set at maximum of 5mm
Measured Clearance _____

 Dummy Contact. Seat set at nearest detent position.
Seat position detent positions rearward of foremost
(Foremost is position zero)

 22. If the steering wheel was repositioned in step 19, return the steering wheel to the original position. If the steering wheel contacts the dummy before reaching the original position, position the wheel until a maximum clearance of 5mm (.2 inches) is achieved, or the steering wheel is in the closest detent position that does not cause dummy contact. (S16.3.2.1.8)

 N/A Steering wheel was not repositioned.

 Original position achieved.

 Dummy contact. Clearance set at maximum of 5mm
Measured Clearance _____

 Dummy Contact. Steering wheel set at nearest detent position.
Steering wheel position detent positions upward of original position.
(Original position is position zero)

X23. If the seat back is adjustable, rotate the seat back forward while holding the thighs in place. Continue rotating the seat back forward until the transverse instrument platform of the dummy head is level ± 0.5 degrees. If the head cannot be leveled using the seat back adjustment, or the seat back is not adjustable, use the lower neck bracket adjustment to level the head. If a level position cannot be achieved, minimize the angle. (S16.3.2.1.9)

X Head Level Achieved. (Check all that apply)

X Head leveled using the adjustable seat back

 Head leveled using the neck bracket.

Head Angle 0.2 degrees

 Head Level NOT Achieved. (Check all that apply)

 Head adjusted using the adjustable seat back

 Head adjusted using the neck bracket.

Head Angle _____ degrees

X24. Verify the pelvis is not interfering with the seat bight. (S16.3.2.1.9)

X No interference

 Pelvis moved forward the minimum amount so that it is not caught in the seat bight.

25. Verify the dummy abdomen is properly installed. (S16.3.2.1.9)
 Abdomen still seated properly into dummy
 Abdomen was adjusted because it was not seated properly into dummy
26. Head Angle
 N/A, neither the pelvis nor the abdomen were adjusted.
- 26.1 Head still level (Go to 27)
- 26.2 Head level adjusted
- Head Level Achieved. (Check all that apply)
 Head leveled using the adjustable seat back
 Head leveled using the neck bracket.
Head Angle _____ degrees
- Head Level NOT Achieved. (Check all that apply)
 Head level adjusted using the adjustable seat back
 Head level adjusted using the neck bracket.
Head Angle _____ degrees
27. If the dummy torso contacts the steering wheel while performing step 23, reposition the steering wheel in the following order to eliminate contact.
 N/A, No dummy torso contact with the steering wheel.
- 27.1 Adjust telescoping mechanism.
 N/A No telescoping adjustment.
 Adjustment performed (fill in appropriate change)
Steering wheel moved _____ detent positions in the forward direction.
Steering wheel moved _____ mm in the forward direction.
- 27.2 Adjust tilt mechanism.
 N/A No tilt adjustment.
 No adjustment performed.
 Adjustment performed.
Steering wheel moved _____ detent positions Upward/Downward.
(circle one)
Steering wheel moved _____ degrees Upward/Downward
- 27.3 Adjust Seat in the aft direction.
 No Adjustment performed.
 Seat moved aft _____ mm from original position.
 Seat moved aft _____ detent positions from the original position.
28. Measure and set the pelvic angle using the pelvic angle gage TE-2504. The pelvic angle should be 20.0 degrees \pm 2.5 degrees. If the pelvic angle cannot be set to the specified range because the head will not be level, adjust the pelvis as closely as possible to the angle range, but keep the head level.
 Pelvic angle set to 20.0 degrees \pm 2.5 degrees.
 Pelvic angle of 20.0 degrees not achieved, the angular difference was minimized.
 Record the pelvic angle. 23.4 degrees

29. Check the dummy for contact with the interior after completing adjustments.
 No contact.
 Dummy in contact with interior.
 Seat moved aft ___ mm from the previous position.
 Seat moved aft ___ detent positions from the previous position.
30. Check the dummy to see if additional interior clearance is obtained, allowing the seat to be moved forward.
 N/A, Seat already at foremost position.
 Clearance unchanged. No adjustments required.
 Additional clearance available
 Seat moved Forward ___ mm from the previous position.
 Seat moved Forward ___ detent positions from the previous position.
31. Driver's foot positioning, right foot. Place the foot perpendicular to the leg and determine if the heel contacts the floor pan at any leg position. If the heel contacts the floor pan proceed to step 32 otherwise, proceed to step 33.
32. Perform the following steps until either all steps are completed, or the foot contacts the accelerator pedal. Step 32.6 shall be completed in all cases.
- 32.1 With the rear of the heel contacting the floor pan, move the foot forward until pedal contact occurs or the foot is at the full forward position.
- 32.2 If the vehicle has an adjustable accelerator pedal, move the pedals rearward until pedal contact occurs or the pedals reach the full rearward position. Not Applicable
- 32.3 Extend the leg, allowing the heel to lose contact with the floor until the foot contacts the pedal. Do not raise the toe of the foot higher than the top of the accelerator pedal. If the foot does not contact the pedal, proceed to the next step. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- 32.4 Angle the foot to achieve contact between the foot and the pedal. If the foot does not contact the pedal, return the foot to the perpendicular orientation. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- 32.5 Align the centerline of the foot with the vertical-longitudinal plane passing through the center of the accelerator pedal. Place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- 32.6 Record foot position
 Pedal Contact achieved. Contact occurred at step 32.1 .
 Heel contacts floor pan
 Heel set _____ mm from floor pan.
 Pedal Contact not achieved. Heel set _____ mm from the floor pan.

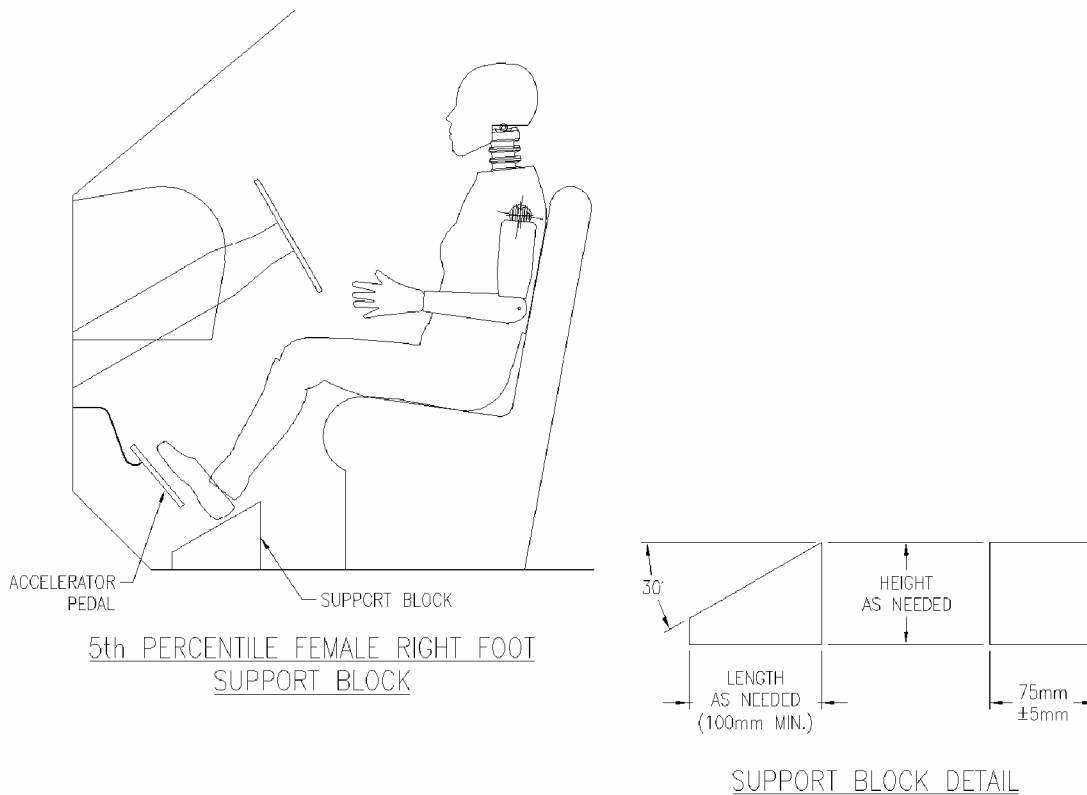


FIGURE G1

- __33. Perform the following steps until either all steps are completed, or the foot contacts the accelerator pedal. Step 33.5 shall be completed in all cases.
- __33.1 Extend the leg until the foot contacts the pedal. Do not raise the toe of the foot higher than the top of the accelerator pedal. If the foot does not contact the pedal, proceed to the next step. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- __33.2 If the vehicle has an adjustable accelerator pedal, move the pedals rearward until pedal contact occurs or the pedals reach the full rearward position. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- __33.3 Angle the foot to achieve contact between the foot and the pedal. If the foot does not contact the pedal, return the foot to the perpendicular orientation. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- __33.4 Align the centerline of the foot in the same horizontal plane as the centerline of the accelerator pedal. Place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.

33.5 Record foot position

 Pedal Contact achieved. Contact occurred at step ____.
 Heel set _____ mm from floor pan.

 Pedal Contact not achieved. Heel set _____ mm from the floor pan.

X 34. Driver's foot positioning, left foot.

X 34.1 Place the foot perpendicular to the leg and determine if the heel contacts the floor pan at any leg position. If the heel contacts the floor pan proceed to step 34.2, otherwise position the leg as perpendicular to the thigh as possible with the foot parallel to the floor pan.

X 34.2 Place the foot on the toe board with the heel resting on the floor pan as close to the intersection of the floor pan and the toe board as possible. Adjust the angle of the foot if necessary to contact the toe board. If the foot will not contact the toe board, set the foot perpendicular to the leg, and set the heel on the floor pan as far forward as possible. Do not place the foot on the wheel well projection or footrest. If the pedals interfere with the placement of the foot, reposition the foot by rotating the foot about the leg, or rotate the leg outboard about the hip if necessary.

 Foot rotated about the leg

 Foot rotated about the leg, and the leg rotated about the hip.

XNo pedal interference

 34.3 Record foot position.

 Heel does not contact floor pan.

 Foot placed on toe board.

 Foot placed on floor pan.

X 35. Driver arm/hand positioning.

X 35.1 Place the dummy's upper arms adjacent to the torso with the arm centerlines as close to a vertical longitudinal plane as possible. (S16.3.2.3.1)

X 35.2 Place the palms of the dummy in contact with the outer part of the steering wheel rim at its horizontal centerline with the thumbs over the steering wheel rim. (S16.3.2.3.2)

X 35.3 If it is not possible to position the thumbs inside the steering wheel rim at its horizontal centerline, then position them above and as close to the horizontal centerline of the steering wheel rim as possible. (S16.3.2.3.3)

X 35.4 Lightly tape the hands to the steering wheel rim so that if the hand of the test dummy is pushed upward by a force of not less than 9 N (2 lb) and not more than 22 N (5 lb), the tape releases the hand from the steering wheel rim. S16.3.2.3.4

X 36. Adjustable head restraints

 N/A, there is no head restraint adjustment

X 36.1 If the head restraint has an automatic adjustment, leave it where the system positions the restraint after the dummy is placed in the seat. (S16.3.4.1) Go to 37.

36.2 Adjust each head restraint vertically so that the horizontal plane determined in item 3 of Data Sheet 14 is aligned with the center of gravity (CG) of the dummy head. (S16.3.4.3)

36.3 If the above position is not attainable, move the vertical center of the head restraint to the closest detent below the center of the head CG. (S16.3.4.3)

N/A midpoint position attained in previous step

Headrest set at nearest detent below the head CG

36.4 If the head restraint has a fore and aft adjustment, place the restraint in the foremost position or until contact with the head is made, whichever occurs first. (S16.3.4.4)

37. Driver and passenger manual belt adjustment (for tests conducted with a belted dummy). (S16.3.5) **Unbelted Test**

37.1 If an adjustable seat belt D-ring anchorage exists, place it in the manufacturer's design position for a 5th percentile adult female.

This information will be supplied by the COTR.

Manufacturer's specified position _____

Actual Position _____

37.2 Place the Type 2 manual belt around the test dummy and fasten the latch. (S16.3.5.2)

37.3 Ensure that the dummy's head remains as level as possible. (S16.3.5.3)

37.4 Remove all slack from the lap belt. Pull the upper torso webbing out of the retractor and allow it to retract; repeat this operation four times. Apply a 9 N (2 lbf) to 18 N (4 lbf) tension load to the lap belt. If the belt system is equipped with a tension-relieving device, introduce the maximum amount of slack into the upper torso belt that is recommended by the manufacturer. If the belt system is not equipped with a tension-relieving device, allow the excess webbing in the shoulder belt to be retracted by the retractive force of the retractor. (S16.3.5.4)

REMARKS: NONE

I certify that I have read and performed each instruction.

Signature: 

Date: 04/26/05

**APPENDIX G
DUMMY POSITIONING PROCEDURES
FOR 5th% PASSENGER TEST DUMMY CONFORMING TO SUBPART O OF PART 572**

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C55107
 Test Date: 4/26/05

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	<input checked="" type="checkbox"/> 32 to 40 kmph	<input type="checkbox"/> 0 to 48 kmph	<input type="checkbox"/> 0 to 56 kmph
DRIVER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	
PASSENGER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	

(Check this item ONLY if it applies to this vehicle.)

The passenger seat adjustments are controlled by the adjustments made to the driver's seat. Therefore, positioning of the passenger dummy is made simultaneously with the driver dummy. Adjustments made to the seat to position the driver will over ride any adjustments that would normally be made to position the passenger. (S16.2.10.3)

- 1. Position the seat's adjustable lumbar supports so that the lumbar supports are in the lowest, retracted or deflated adjustment position. (S16.2.10.1)
 N/A – No lumbar adjustment
- 2. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)
 N/A – No additional support adjustment
- 3. If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1)
 N/A – No independent fore-aft seat cushion adjustment
- 4. Use the seat markings determined during the completion of Data Sheet 14 to set the rearmost fore-aft position, mid-height position and the seat cushion mid-angle. (S16.3.3.1.1)
- 5. Fully recline the seat back. (S16.3.3.1.2)
 N/A seat back not adjustable.
- 6. Place the dummy in the seat with the legs at an angle of 120 degrees to the thighs. The calves should not be touching the seat cushion. (S16.3.3.1.2)
- 7. Position the dummy in the seat such that the midsagittal plane is coincident with the longitudinal seat cushion marking that was determined in item 2.19 of Data Sheet 14 (S16.3.3.1.3 and S16.3.3.1.4)
- 8. Hold down the dummy's thighs and push rearward on the upper torso to maximize the pelvic angle. (S16.3.3.1.5)
- 9. Set the angle between the legs and the thighs to 120 degrees. (S16.3.3.1.6)

10. Set the transverse distance between the centers of the front of the knees at 160 to 170 mm. (6.3 to 6.7 inches) Center the knee separation with respect to the longitudinal seat cushion marking that was determined in item 2.19 of Data Sheet 14. (S16.3.3.1.6)
Record Knee Separation 169 mm
11. Push rearward on the dummy's knees until the pelvis contacts the seat back, or the backs of the calves contact the seat cushion, whichever occurs first. (S16.3.3.1.6)
 Pelvis contacted seat back.
 Calves contacted seat cushion.
12. Gently rock the upper torso ± 5 degrees (approximately 51 mm (2 inches)) side-to-side three times. (S16.3.3.1.7)
13. If needed, extend the legs until the feet do not contact the floor pan. The thighs should be resting on the seat cushion. (S16.3.3.1.8)
14. Use seat controls to line up the seat markings determined during the completion of Data Sheet 14 to set the foremost fore-aft position, mid-height position and the seat cushion mid-angle. If the dummy contacts the interior move the seat rearward until a maximum clearance of 5 mm (0.2 inches) is achieved or the seat is in the closest detent position that does not cause dummy contact. (S16.3.3.1.8)
 Foremost, mid-height position and the seat cushion mid-angle reached

 Dummy Contact. Clearance set at maximum of 5mm
Measured Clearance _____

 Dummy Contact. Seat set at nearest detent position.
Seat position ____ detent positions rearward of foremost
(Foremost is position zero)
15. If the seat back is adjustable, rotate the seat back forward while holding the thighs in place. Continue rotating the seat back forward until the transverse instrument platform of the dummy head is level ± 0.5 degrees. If head cannot be leveled using the seat back adjustment, or the seat back is not adjustable, use the lower neck bracket adjustment to level the head. If a level position cannot be achieved, adjust the head as closely as possible to the ± 0.5 degree range. (S16.3.3.1.9 and S16.3.3.1.10)
(Check All That Apply)
 Seat back not adjustable

 Seat back not independent of driver side seat back

 Head Level Achieved. (Check all that apply)
 Head leveled using the adjustable seat back
 Head leveled using the neck bracket.
Head Angle 0.2 degrees

 Head Level NOT Achieved. (Check all that apply)
 Head adjusted using the adjustable seat back
 Head adjusted using the neck bracket.
Head Angle _____ degrees

16. Verify the pelvis is not interfering with the seat bight. (S16.3.3.1.9)
 No interference
 Pelvis moved forward the minimum amount so that it is not caught in the seat bight.
17. Verify the dummy abdomen is properly installed. (S16.3.3.1.9)
 Abdomen still seated properly into dummy
 Abdomen was adjusted because it was not seated properly into dummy
18. Head Angle
 N/A, neither the pelvis nor the abdomen were adjusted.
- 18.1 Head still level (Go to 19)
- 18.2 Head level adjusted
- Head Level Achieved. (Check all that apply)
 Head leveled using the adjustable seat back
 Head leveled using the neck bracket.
Head Angle _____ degrees
- Head Level NOT Achieved. (Check all that apply)
 Head adjusted using the adjustable seat back
 Head adjusted using the neck bracket.
Head Angle _____ degrees
19. Measure and set the pelvic angle using the pelvic angle gage TE-2504. The pelvic angle should be 20.0 degrees \pm 2.5 degrees. If the pelvic angle cannot be set to the specified range because the head will not be level, adjust the pelvis as closely as possible to the angle range, but keep the head level.
 Pelvic angle set to 20.0 degrees \pm 2.5 degrees.
 Pelvic angle of 20.0 degrees not achieved, the angular difference was minimized.
 Record the pelvic angle. 24.8 degrees
20. Check the dummy for contact with the interior after completing adjustments.
 No contact.
 Dummy in contact with interior.
 Seat moved aft _____ mm from the previous position.
 Seat moved aft _____ detent positions from the previous position.
21. Verify the transverse instrument platform of the dummy head is level +/- 0.5 degrees. Use the lower neck bracket adjustment to level the head. If a level position cannot be achieved, minimize the angle. (S16.3.3.1.9, S16.3.3.1.10, and S16.3.3.1.11)
 Head Level Achieved
Head Angle 0.2 degrees
 Head Level NOT Achieved.
Head Angle _____ degrees

22. Check the dummy to see if additional interior clearance is obtained, allowing the seat to be moved forward. (S16.3.3.1.12)

N/A Bench Seat

N/A Seat already at full forward position.

Clearance unchanged. No adjustments required.

Additional clearance available

Seat moved Forward ___ mm from the previous position.

Seat moved Forward ___ detent positions from the previous position.

Seat moved Forward, Full Forward position reached.

23. Passenger foot positioning. (Indicate final position achieved) (S16.3.3.2)

23.1 Place feet flat on the toe board; OR

23.2 If the feet cannot be placed flat on the toe board, set the feet perpendicular to the lower leg, and rest the heel as far forward on the floor pan as possible; OR

23.3 If the heels do not touch the floor pan, set the legs to vertical and set the feet parallel to the floor pan.

24. Passenger arm/hand positioning. (S16.3.3.3)

24.1 Place the dummy's upper arms adjacent to the torso with the arm centerlines as close to a vertical longitudinal plane as possible. (S16.3.2.3.1)

24.2 Place the palms of the dummy in contact with the outer part of the thighs (S16.3.3.3.2)

24.3 Place the little fingers in contact with the seat cushion. (S16.3.3.3.3)

25. Adjustable head restraints

N/A, there is no head restraint adjustment

25.1 If the head restraint has an automatic adjustment, leave it where the system positions the restraint after the dummy is placed in the seat. (S16.3.4.1) Go to 26.

25.2 Adjust each head restraint vertically so that the horizontal plane determined in item 3 of Data Sheet 14 is aligned with the center of gravity (CG) of the dummy head. (S16.3.4.3)

25.3 If the above position is not attainable, move the vertical center of the head restraint to the closest detent below the center of the head CG. (S16.3.4.3)

N/A midpoint position attained in previous step

Headrest set at nearest detent below the head CG

25.4 If the head restraint has a fore and aft adjustment, place the restraint in the foremost position or until contact with the head is made, whichever occurs first. (S16.3.4.4)

26 Manual belt adjustment (for tests conducted with a belted dummy) S16.3.5

N/A, **Unbelted test**

__26.1 If an adjustable seat belt D-ring anchorage exists, place it in the manufacturer's design position for a 5th percentile adult female.

This information will be supplied by the COTR.

Manufacturer's specified position _____

Actual Position _____

__26.2 Place the Type 2 manual belt around the test dummy and fasten the latch. (S16.3.5.2)

__26.3 Ensure that the dummy's head remains as level as possible. (S16.3.5.3)

__26.4 Remove all slack from the lap belt. Pull the upper torso webbing out of the retractor and allow it to retract; repeat this operation four times. Apply a 9 N (2 lbf) to 18 N (4 lbf) tension load to the lap belt. If the belt system is equipped with a tension-relieving device, introduce the maximum amount of slack into the upper torso belt that is recommended by the manufacturer. If the belt system is not equipped with a tension-relieving device, allow the excess webbing in the shoulder belt to be retracted by the retractive force of the retractor. (S16.3.5.4)

REMARKS: NONE

I certify that I have read and performed each instruction.

Signature: Wayne J. Ahl

Date: 04/26/05


DATA SHEET 35

DUMMY MEASUREMENTS

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Eric Peschman

NHTSA No.: C55107
 Test Date: 4/26/05

DUMMY MEASUREMENTS FOR FRONT SEAT OCCUPANTS

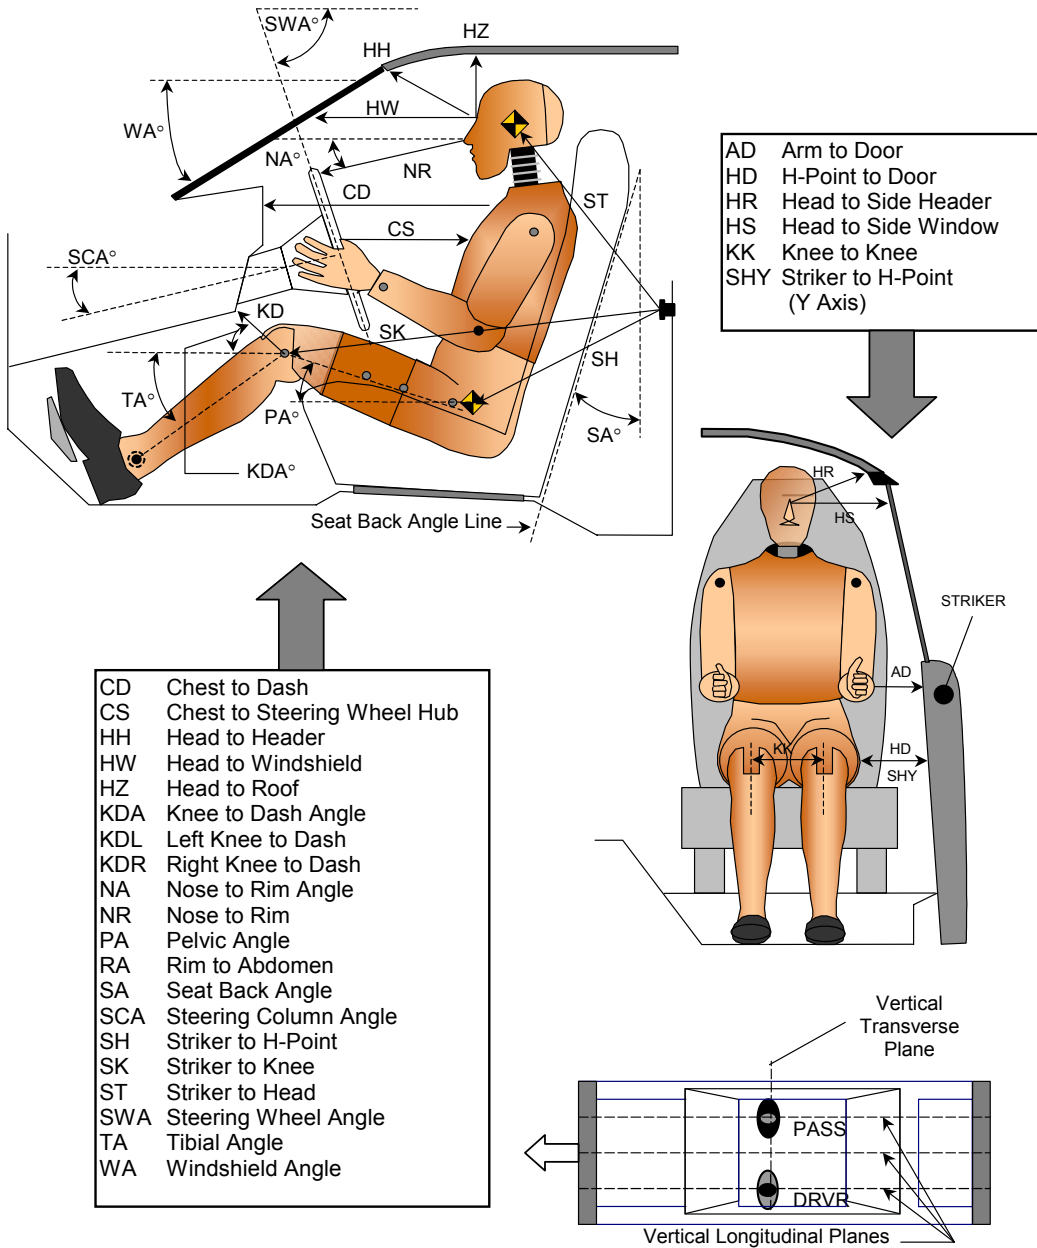

DATA SHEET 35
DUMMY MEASUREMENTS

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Eric Peschman


NHTSA No.: C55107
 Test Date: 4/26/05

TEST DUMMY POSITION MEASUREMENTS

Code	Measurement Description	Driver SN 506		Passenger SN 511	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA	Windshield Angle		31.3		
SWA	Steering Wheel Angle		62.0		
SCA	Steering Column Angle		28.6		
SA	Seat Back Angle*		5.0		7.0
HZ	Head to Roof (Z)	258	90	267	90
HH	Head to Header	332	43.3	365	39.6
HW	Head to Windshield	617	0	637	0
HR	Head to Side Header (Y)	283		295	
NR	Nose to Rim	306	6.9		
CD	Chest to Dash	465		405	
CS	Chest to Steering Hub	225	2.3		
RA	Rim to Abdomen	88	0		
KDL	Left Knee to Dash	94	35.1	96	
KDR	Right Knee to Dash	93		90	34.4
PA	Pelvic Angle		23.4		24.8
TA	Tibia Angle		52.9		50.2
KK	Knee to Knee (Y)	276		214	
SK	Striker to Knee	682	84.1	673	84.3
ST	Striker to Head	487	25.4	477	23.5
SH	Striker to H-Point	370	106.3	379	107.4
SHY	Striker to H-Point (Y)	307		296	
HS	Head to Side Window	376		356	
HD	H-Point to Door (Y)	228		223	
AD	Arm to Door (Y)	159		175	
AA	Ankle to Ankle	257		187	

*Measured on the headrest post

SEAT BELT POSITIONING DATA

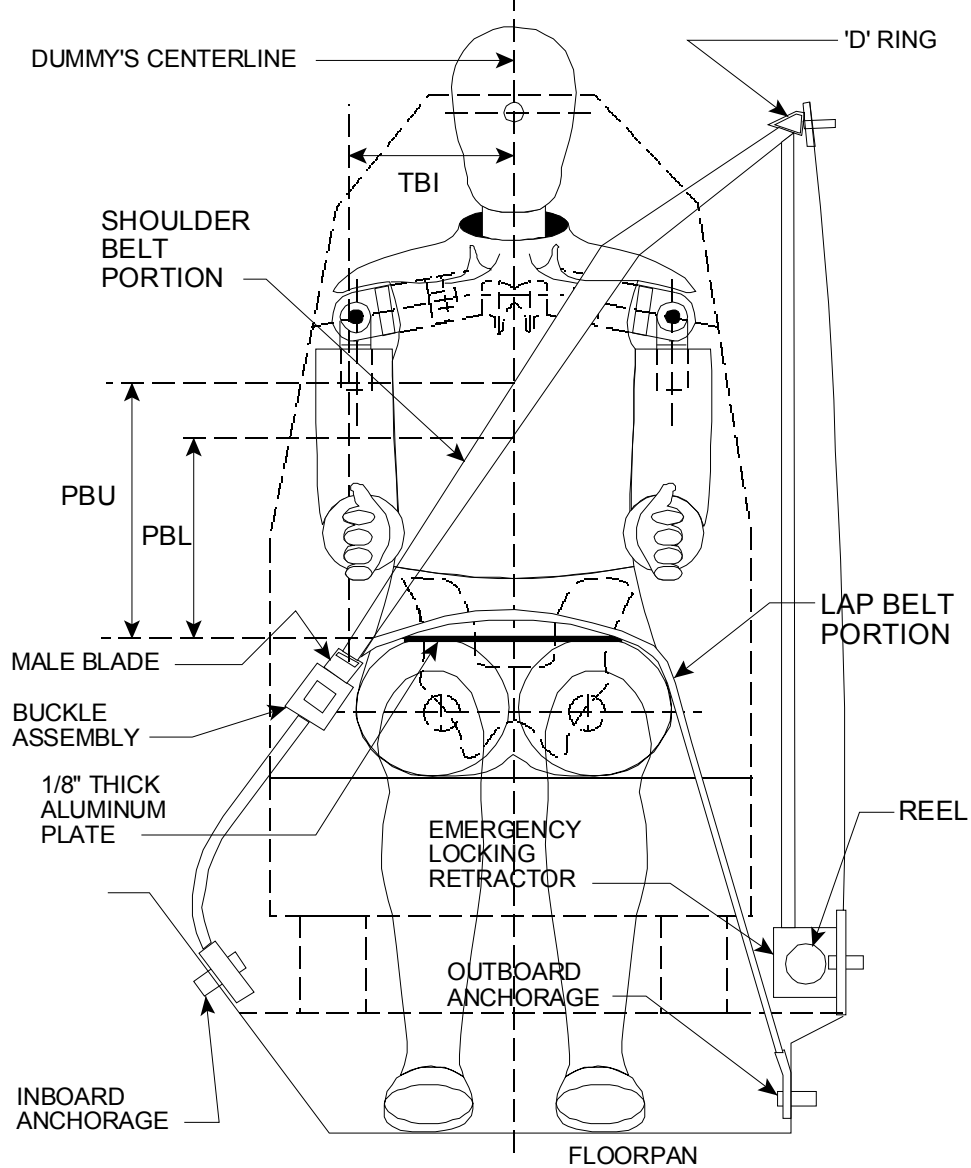

FRONT VIEW OF DUMMY

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU - Top surface of reference to belt upper edge	mm	N/A	N/A
PBL - To surface of reference to belt lower edge	mm	N/A	N/A

DATA SHEET 36

CRASH TEST

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Eric Peschman

NHTSA No.: C55107
 Test Date: 4/26/05

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	<u>X</u> 32 to 40 kmph	<u> </u> 0 to 48 kmph	<u> </u> 0 to 56 kmph
DRIVER DUMMY:	<u>X</u> 5 TH female	<u> </u> 50 th Male	
PASSENGER DUMMY:	<u>X</u> 5 TH female	<u> </u> 50 th Male	

- 1. Vehicle underbody painted
- 2. The speed measuring devices are in place and functioning.
- 3. The speed measuring devices are 1.0 m from the barrier (spec. 1.5m) and 30 cm from the barrier (spec. is 30 cm)
- 4. Convertible top is in the closed position.
 - N/A, not a convertible
- 5. Instrumentation and wires are placed so the motion of the dummies during impact is not affected.
- 6. Tires inflated to pressure on tire placard or if it does not have a tire placard because it is not a passenger car, then inflated to the tire pressure specified in the owner information.


210 kpa front left tire 210 kpa specified on tire placard or in owner information
210 kpa front right tire 210 kpa specified on tire placard or in owner information
210 kpa rear left tire 210 kpa specified on tire placard or in owner information
210 kpa rear right tire 210 kpa specified on tire placard or in owner information

- 7. Time zero contacts on barrier in place.
- 8. Pre test zero and shunt calibration adjustments performed and recorded
- 9. Dummy temperature meets requirements of section 12.2 of the test procedure.
- 10. Vehicle hood closed and latched
- 11. Transmission placed in neutral
- 12. Parking brake off
- 13. Ignition in the ON position
- 14. Doors closed and latched but not locked
- 15. Posttest zero and shunt calibration checks performed and recorded
- 16. Actual test speed 39.8 kmph
- 17. Vehicle rebound from the barrier 317 cm
- 18. Describe whether the doors open after the test and what method is used to open the doors.
 - Left Front Door: Door remained closed and latched; Door opened without tools
 - Right Front Door: Door remained closed and latched; Door opened without tools
 - Left Rear Door: Door remained closed and latched; Door opened without tools
 - Right Rear Door: Door remained closed and latched; Door opened without tools

- 19. Describe the contact points of the dummy with the interior of the vehicle.
 - Driver Dummy: Head to air bag and headrest; Chest to air bag; Knees to knee bolster.
 - Passenger Dummy: Head to air bag; Chest to air bag; Knees to glove box.

REMARKS:

I certify that I have read and performed each instruction.

Signature: 

Date: 04/26/05

DATA SHEET NO. 38

ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Nick Kosinski

NHTSA No.: C55107
 Test Date: 4/26/05

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	<input checked="" type="checkbox"/> 32 to 40 kmph	<input type="checkbox"/> 0 to 48 kmph	<input type="checkbox"/> 0 to 56 kmph
DRIVER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	
PASSENGER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	

Vehicle Year/Make/Model/Body Style:	2005 Toyota Highlander MPV
VIN:	JTEGP21A650062275
Wheelbase:	2709 mm
Build Date:	12/04
Vehicle Size Category:	3
Test Weight:	1814.4 kg
Front Overhang:	1034 mm
Overall Width:	1831 mm
Overall Length Center:	4666 mm

Accelerometer Data	
Location:	As per measurements on Data Sheet 31
Linearity:	>99.9%


Integration Algorithm:	Trapezoidal
Vehicle Impact Speed:	39.8 kmph
Time of Separation:	93.9 ms *
Velocity Change:	39.8 kmph *

*The accelerometers on the rear seat cross member during the moved impact.

CRUSH PROFILE

Collision Deformation Classification: 12FDEW6
 Midpoint of Damage: Vehicle Longitudinal Centerline
 Damage Region Length (mm): 1222
 Impact Mode: Frontal Barrier

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	4514	4340	174
C2	Crush zone 2 at left side	mm	4608	4342	266
C3	Crush zone 3 at left side	mm	4659	4366	293
C4	Crush zone 4 at right side	mm	4660	4383	277
C5	Crush zone 5 at right side	mm	4620	4347	273
C6	Crush zone 6 at right side	mm	4515	4334	181

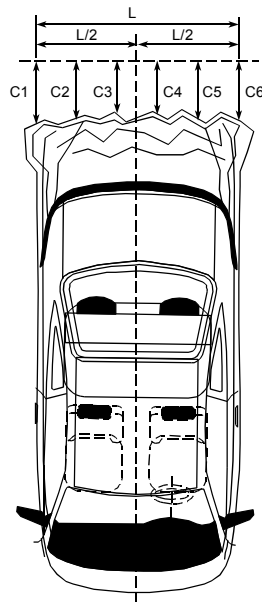

REMARKS:

I certify that I have read and performed each instruction.

Signature: *Nick Kosinski*

Date: 04/26/05

DATA SHEET 39
WINDSHIELD MOUNTING (FMVSS 212)

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Nick Kosinski

NHTSA No.: C55107
 Test Date: 4/26/05

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	<input checked="" type="checkbox"/> 32 to 40 kmph	<input type="checkbox"/> 0 to 48 kmph	<input type="checkbox"/> 0 to 56 kmph
DRIVER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	
PASSENGER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	


1. Pre-Crash
- 1.1 Describe from visual inspection how the windshield is mounted and describe any trim material.
- Retained with glue
Rubber and plastic trim
- 1.2 Mark the longitudinal centerline of the windshield
- 1.3 Measure pre-crash A, B, and C for the left side and record in the chart below.
- 1.4 Measure pre-crash C, D, and E for the right side and record in the chart below.
- 1.5 Measure from the edge of the retainer or molding to the edge of the windshield.
- Dimension G (mm): 17
2. Post Crash
- 2.1 Can a single thickness of copier type paper (as small a piece as necessary) slide between the windshield and the vehicle body?
- No – Pass. Skip to the table of measurements, complete it by repeating the pre-crash measurements in the post crash column, and calculate the retention percentage, which will be 100%.
- Yes, go to 2.2
- 2.2 Visibly mark the beginning and end of the portions of the periphery where the paper slides between the windshield and the vehicle body.
- 2.3 Measure and record post-crash A, B, C, D, E, and F such that the measurements do not include any of the parts of the windshield where the paper slides between the windshield and the vehicle body.
- 2.4 Calculate and record the percent retention for the right and left side of the windshield.
- 2.5 Is total right side percent retention less than 75%?
- Yes, Fail
- No, Pass
- 2.6 Is total left side percent retention less than 75%?
- Yes, Fail
- No, Pass

WINDSHIELD RETENTION MEASUREMENTS

	Dimension	Pre-Crash (mm)	Post-Crash (mm)	Percent Retention (Post-Test ÷ Pre-Crash)
Left Side	A	605	605	100%
	B	742	742	100%
	C	760	760	100%
	Total	2107	2107	100%
Right Side	D	605	605	100%
	E	742	742	100%
	F	760	760	100%
	Total	2107	2107	100%

Indicate area of mounting failure. NONE

FRONT VIEW OF WINDSHIELD

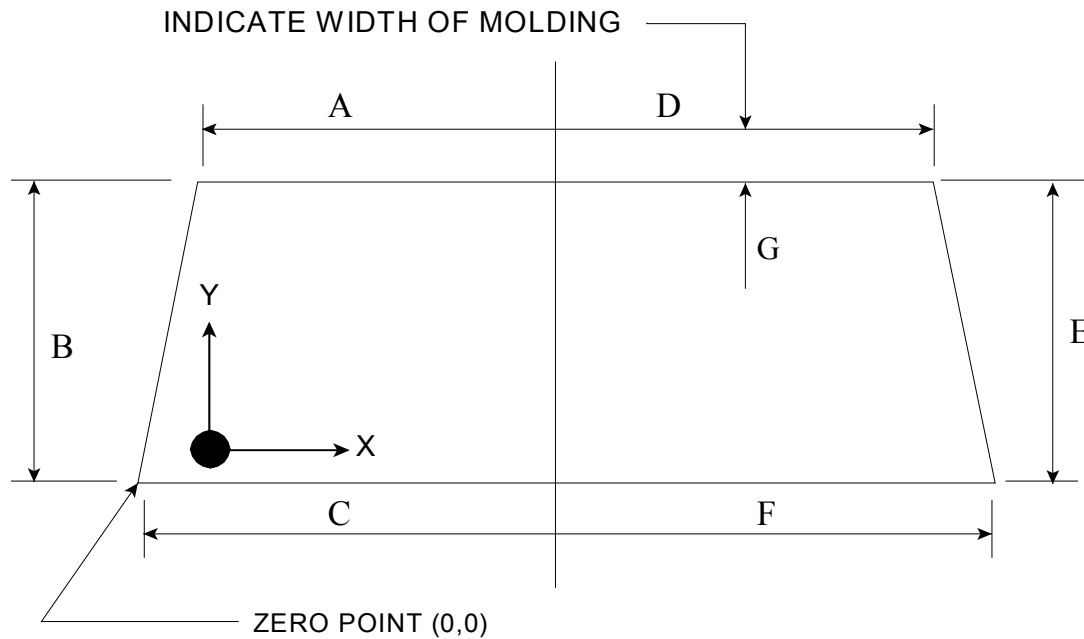

REMARKS:

I certify that I have read and performed each instruction.

Signature: *Tyck Kosinski*

Date: 04/26/05

DATA SHEET 40
WINDSHIELD ZONE INTRUSION (FMVSS 219)


Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance
 Test Technician: Nick Kosinski

NHTSA No.: C55107
 Test Date: 4/26/05

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants		
TEST SPEED:	<input checked="" type="checkbox"/> 32 to 40 kmph	<input type="checkbox"/> 0 to 48 kmph	<input type="checkbox"/> 0 to 56 kmph
DRIVER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	
PASSENGER DUMMY:	<input checked="" type="checkbox"/> 5 TH female	<input type="checkbox"/> 50 th Male	

- 1. Place a 165 mm diameter rigid sphere, with a mass of 6.8 kg on the instrument panel so that it is simultaneously touching the instrument panel and the windshield. (571.219 S6.1(a))
- 2. Roll the sphere from one side of the windshield to the other while marking on the windshield where the sphere contacts the windshield. (571.219 S6.1(b))
- 3. From the outermost contactable points on the windshield draw a horizontal line to the edges of the windshield. (571.219 S6.1(b))
- 4. Draw a line on the inner surface of the windshield that is 13 mm below the line determined in items 2 and 3
- 5. After the crash test, record any points where a part of the exterior of the vehicle has marked, penetrated, or broken the windshield.

Provide all dimensions necessary to reproduce the protected area.

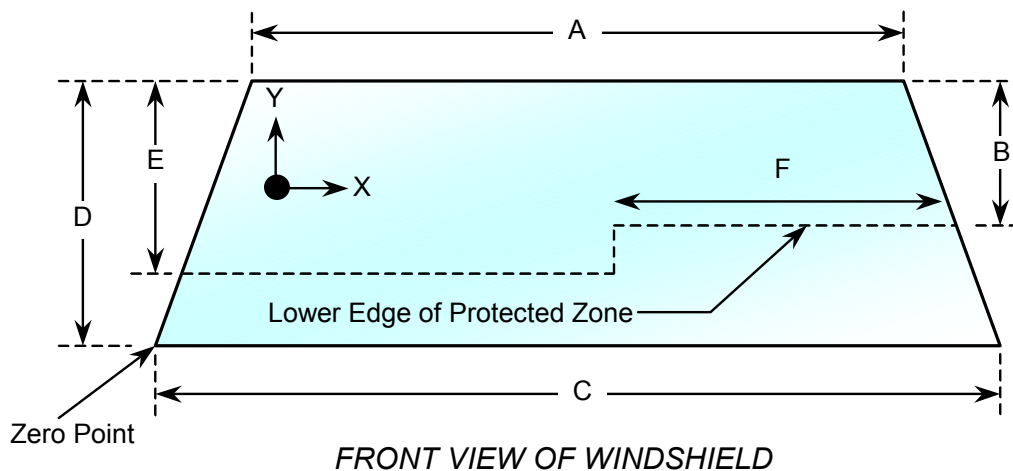

WINDSHIELD DIMENSIONS

Item	Units	Value
A	mm	1210
B	mm	480
C	mm	1520
D	mm	742
E	mm	485
F	mm	505

AREA OF PROTECTED ZONE FAILURES:

- B. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one which is normally in contact with the windshield.

X	Y
NONE	

- C. Provide coordinates of the area beneath the protected zone template that the inner surface of the windshield was penetrated by a vehicle component.

X	Y
NONE	

REMARKS:

I certify that I have read and performed each instruction.

Signature: *Alick Kosinski*

Date: 04/26/05

DATA SHEET 41

FUEL SYSTEM INTEGRITY (FMVSS 301)

Test Vehicle: 2005 Toyota Highlander MPV
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C55107
Test Date: 4/26/05

TYPE OF IMPACT:	25 mph Unbelted Flat Frontal
-----------------	------------------------------


Stoddard Solvent Spillage Measurements

- A. From impact until vehicle motion ceases: 0 grams
(Maximum Allowable = 28 grams)
- B. For the 5 minute period after motion ceases: 0 grams
(Maximum Allowable = 142 grams)
- C. For the following 25 minutes: 0 grams
(Maximum Allowable = 28 grams/minute)
- D. Spillage: 0

DATA SHEET NO. 41
FMVSS 301 STATIC ROLLOVER DATA

Test Vehicle: 2005 Toyota Highlander MPV
 Test Program: FMVSS 208 Compliance

NHTSA No.: C55107
 Test Date: 4/26/05

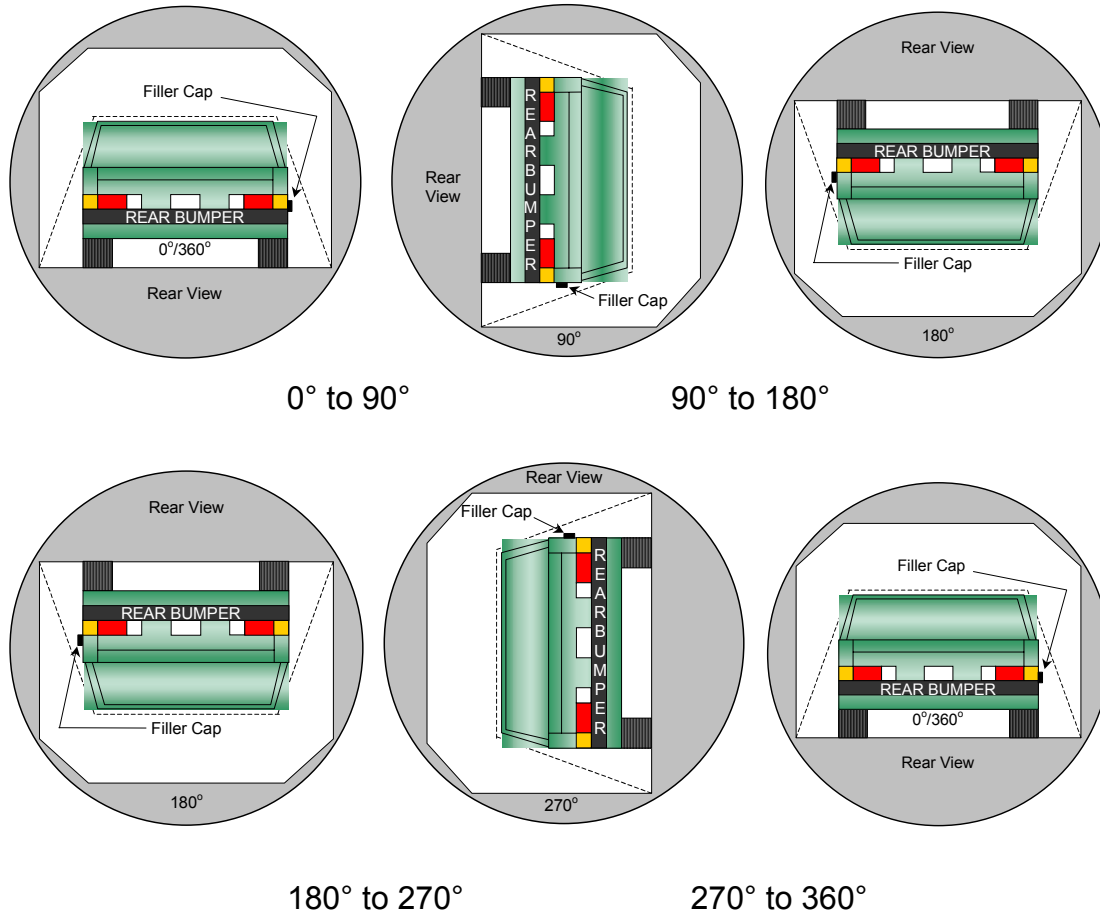

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage locations:

Test Phase	Rotation Time (sec.)	Hold Time (sec.)	Spillage (grams)
0° to 90°	161	300	0
90° to 180°	149	300	0
180° to 270°	145	300	0
270° to 360°	166	300	0





APPENDIX A
CRASH TEST DATA




TABLE OF DATA PLOTS





		<u>Page No.</u>
Figure No. 1.	Driver Head X Acceleration vs. Time	A-1
Figure No. 2.	Driver Head Y Acceleration vs. Time	A-1
Figure No. 3.	Driver Head Z Acceleration vs. Time	A-1
Figure No. 4.	Driver Head Resultant Acceleration vs. Time	A-1
Figure No. 5.	Driver Head X Velocity vs. Time	A-2
Figure No. 6.	Driver Head Y Velocity vs. Time	A-2
Figure No. 7.	Driver Head Z Velocity vs. Time	A-2
Figure No. 8.	Driver Neck Force X vs. Time	A-3
Figure No. 9.	Driver Neck Force Y vs. Time	A-3
Figure No. 10.	Driver Neck Force Z vs. Time	A-3
Figure No. 11.	Driver Neck Force Resultant vs. Time	A-3
Figure No. 12.	Driver Neck Moment X vs. Time	A-4
Figure No. 13.	Driver Neck Moment Y vs. Time	A-4
Figure No. 14.	Driver Neck Moment Z vs. Time	A-4
Figure No. 15.	Driver Neck Moment Resultant vs. Time	A-4
Figure No. 16.	Driver Chest X Acceleration vs. Time	A-5
Figure No. 17.	Driver Chest Y Acceleration vs. Time	A-5
Figure No. 18.	Driver Chest Z Acceleration vs. Time	A-5
Figure No. 19.	Driver Chest Resultant Acceleration vs. Time	A-5
Figure No. 20.	Driver Chest X Velocity vs. Time	A-6
Figure No. 21.	Driver Chest Y Velocity vs. Time	A-6
Figure No. 22.	Driver Chest Z Velocity vs. Time	A-6
Figure No. 23.	Driver Chest Displacement vs. Time	A-6
Figure No. 24.	Driver Left Femur Force vs. Time	A-7
Figure No. 25.	Driver Right Femur Force vs. Time	A-7
Figure No. 26.	Passenger Head X Acceleration vs. Time	A-8
Figure No. 27.	Passenger Head Y Acceleration vs. Time	A-8
Figure No. 28.	Passenger Head Z Acceleration vs. Time	A-8
Figure No. 29.	Passenger Head Resultant Acceleration vs. Time	A-8





	<u>Page No.</u>	
Figure No. 30.	Passenger Head X Velocity vs. Time	A-9
Figure No. 31.	Passenger Head Y Velocity vs. Time	A-9
Figure No. 32.	Passenger Head Z Velocity vs. Time	A-9
Figure No. 33.	Passenger Neck Force X vs. Time	A-10
Figure No. 34.	Passenger Neck Force Y vs. Time	A-10
Figure No. 35.	Passenger Neck Force Z vs. Time	A-10
Figure No. 36.	Passenger Neck Force Resultant vs. Time	A-10
Figure No. 37.	Passenger Neck Moment X vs. Time	A-11
Figure No. 38.	Passenger Neck Moment Y vs. Time	A-11
Figure No. 39.	Passenger Neck Moment Z vs. Time	A-11
Figure No. 40.	Passenger Neck Moment Resultant vs. Time	A-11
Figure No. 41.	Passenger Chest X Acceleration vs. Time	A-12
Figure No. 42.	Passenger Chest Y Acceleration vs. Time	A-12
Figure No. 43.	Passenger Chest Z Acceleration vs. Time	A-12
Figure No. 44.	Passenger Chest Resultant Acceleration vs. Time	A-12
Figure No. 45.	Passenger Chest X Velocity vs. Time	A-13
Figure No. 46.	Passenger Chest Y Velocity vs. Time	A-13
Figure No. 47.	Passenger Chest Z Velocity vs. Time	A-13
Figure No. 48.	Passenger Chest Displacement vs. Time	A-13
Figure No. 49.	Passenger Left Femur Force vs. Time	A-14
Figure No. 50.	Passenger Right Femur Force vs. Time	A-14
Figure No. 51.	Driver Nij (N_{TF}) vs. Time	A-15
Figure No. 52.	Driver Nij (N_{TE}) vs. Time	A-15
Figure No. 53.	Driver Nij (N_{CF}) vs. Time	A-15
Figure No. 54.	Driver Nij (N_{CE}) vs. Time	A-15
Figure No. 55.	Passenger Nij (N_{TF}) vs. Time	A-16
Figure No. 56.	Passenger Nij (N_{TE}) vs. Time	A-16
Figure No. 57.	Passenger Nij (N_{CF}) vs. Time	A-16
Figure No. 58.	Passenger Nij (N_{CE}) vs. Time	A-16
Figure No. 59.	Driver Occipital Condyle Moment vs. Time	A-17





		<u>Page No.</u>
Figure No. 60.	Passenger Occipital Condyle Moment vs. Time	A-17
Figure No. 61.	Left Rear Seat Crossmember X Acceleration vs. Time	A-18
Figure No. 62.	Left Rear Seat Crossmember X Velocity vs. Time	A-18
Figure No. 63.	Right Rear Seat Crossmember X Acceleration vs. Time	A-18
Figure No. 64.	Right Rear Seat Crossmember X Velocity vs. Time	A-18
Figure No. 65.	Top of Engine X Acceleration vs. Time	A-19
Figure No. 66.	Top of Engine X Velocity vs. Time	A-19
Figure No. 67.	Bottom of Engine X Acceleration vs. Time	A-19
Figure No. 68.	Bottom of Engine X Velocity vs. Time	A-19
Figure No. 69.	Left Brake Caliper X Acceleration vs. Time	A-20
Figure No. 70.	Left Brake Caliper X Velocity vs. Time	A-20
Figure No. 71.	Right Brake Caliper X Acceleration vs. Time	A-20
Figure No. 72.	Right Brake Caliper X Velocity vs. Time	A-20
Figure No. 73.	Instrument Panel X Acceleration vs. Time	A-21
Figure No. 74.	Instrument Panel X Velocity vs. Time	A-21
Figure No. 75.	Trunk Z Acceleration vs. Time	A-21
Figure No. 76.	Trunk Z Velocity vs. Time	A-21
Figure No. 77.	Barrier Sum Row 1 vs. Time	A-22
Figure No. 78.	Barrier Sum Row 2 vs. Time	A-22
Figure No. 79.	Barrier Sum Row 3 vs. Time	A-22
Figure No. 80.	Barrier Sum Row 4 vs. Time	A-22
Figure No. 81.	Barrier Sum Row 5 vs. Time	A-23
Figure No. 82.	Barrier Sum Row 6 vs. Time	A-23
Figure No. 83.	Barrier Sum Row 7 vs. Time	A-23
Figure No. 84.	Barrier Sum Row 8 vs. Time	A-23
Figure No. 85.	Barrier Sum Row 9 vs. Time	A-24
Figure No. 86.	Barrier Total Force vs. Time	A-24
Figure No. 87.	Barrier Rows 1 to 9 vs. Time	A-25
Figure No. 88.	Barrier Total Force vs. Time	A-25

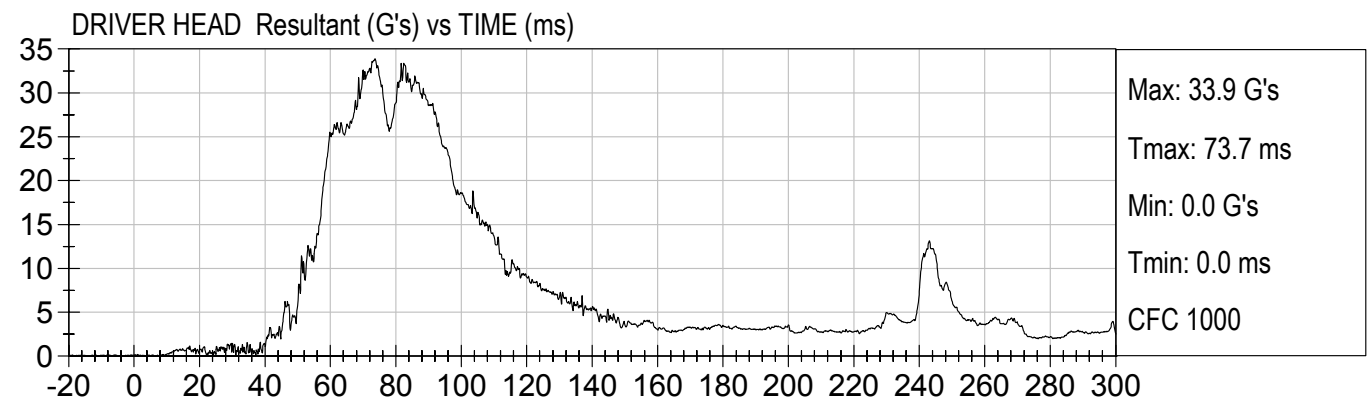
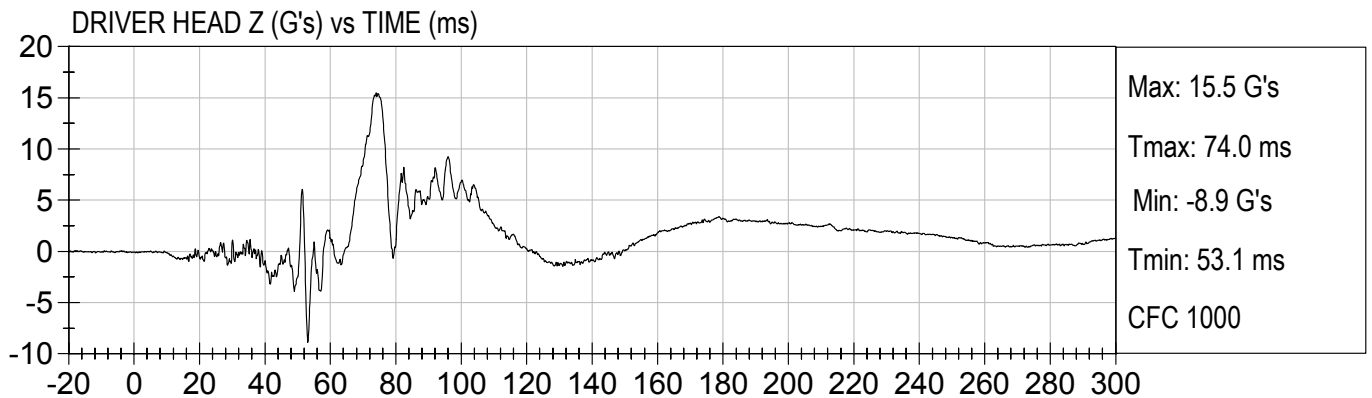
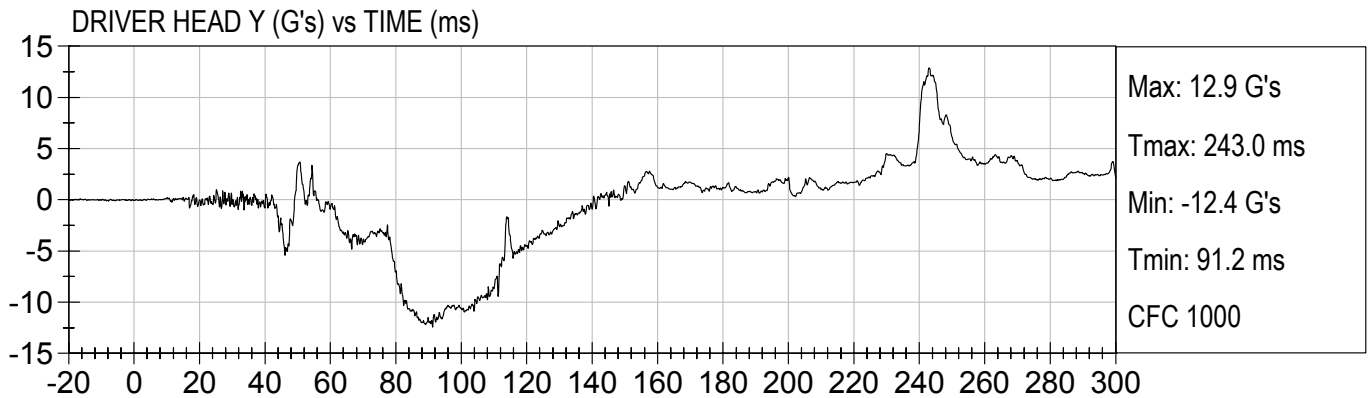
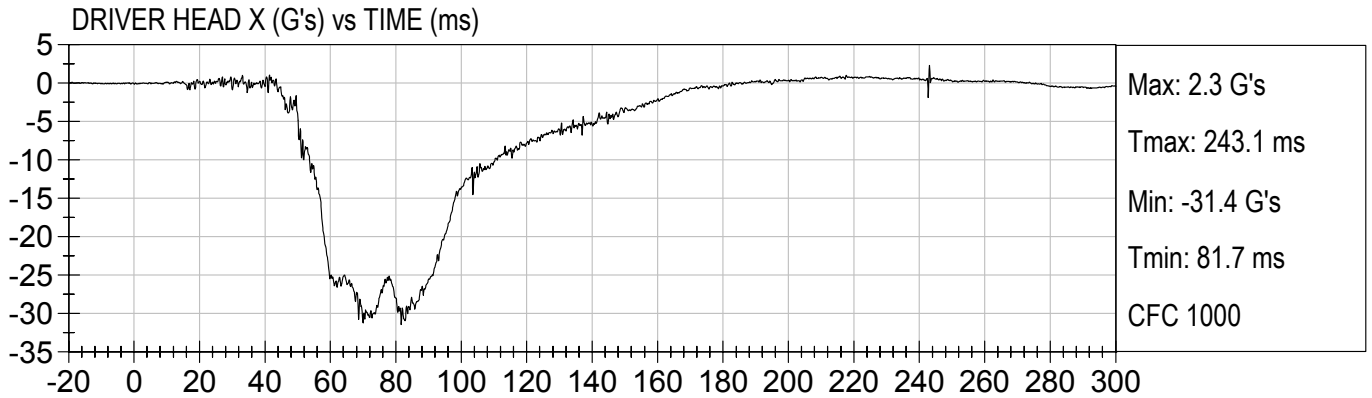


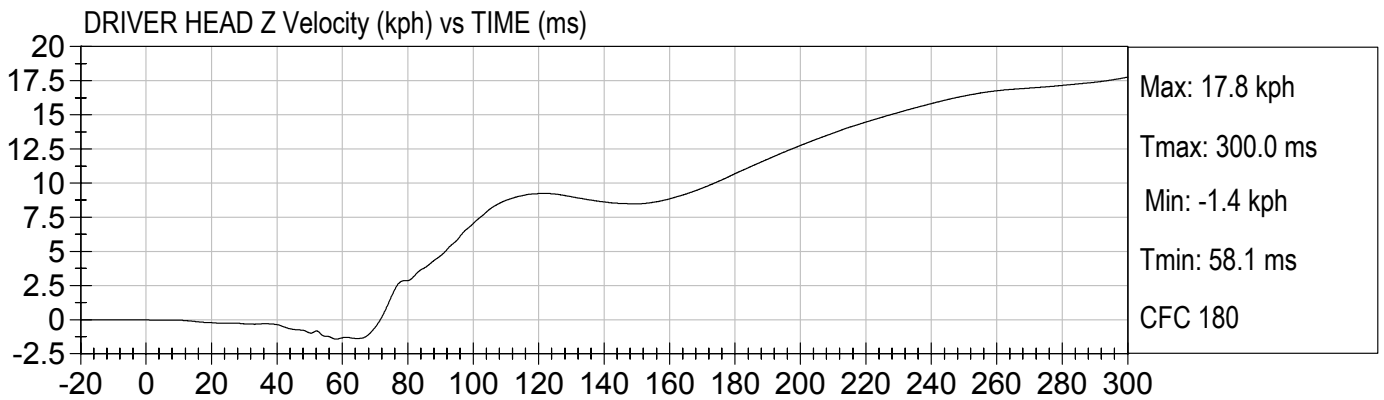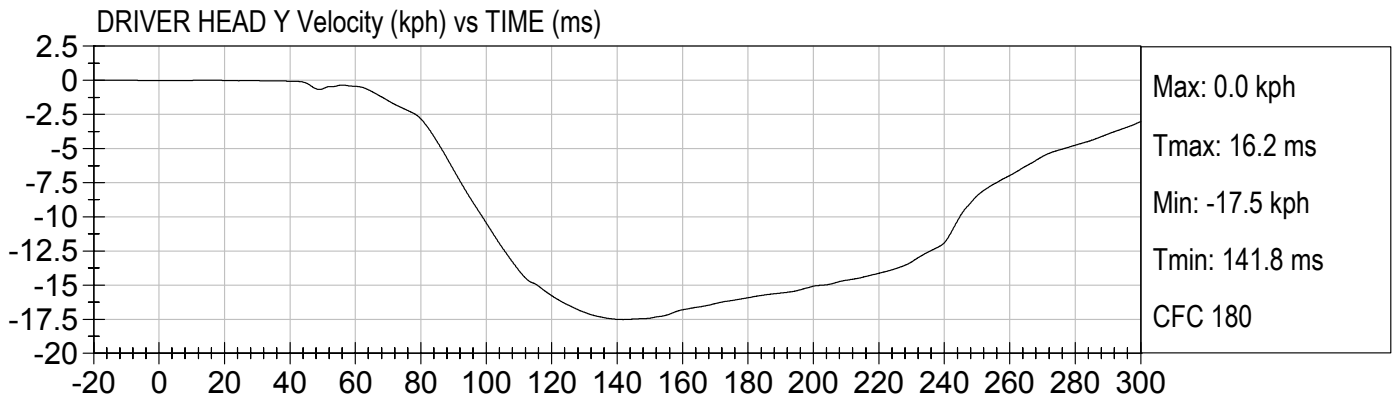
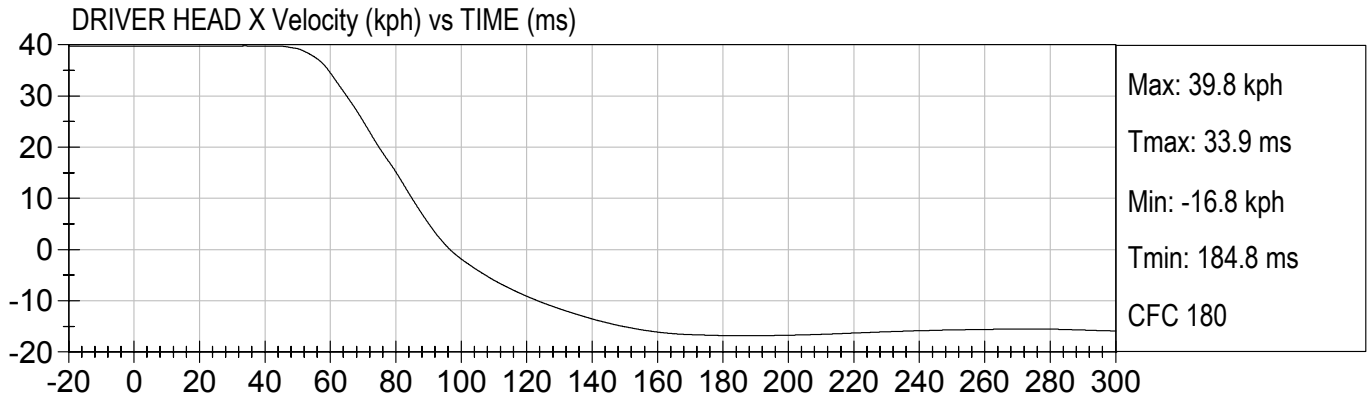


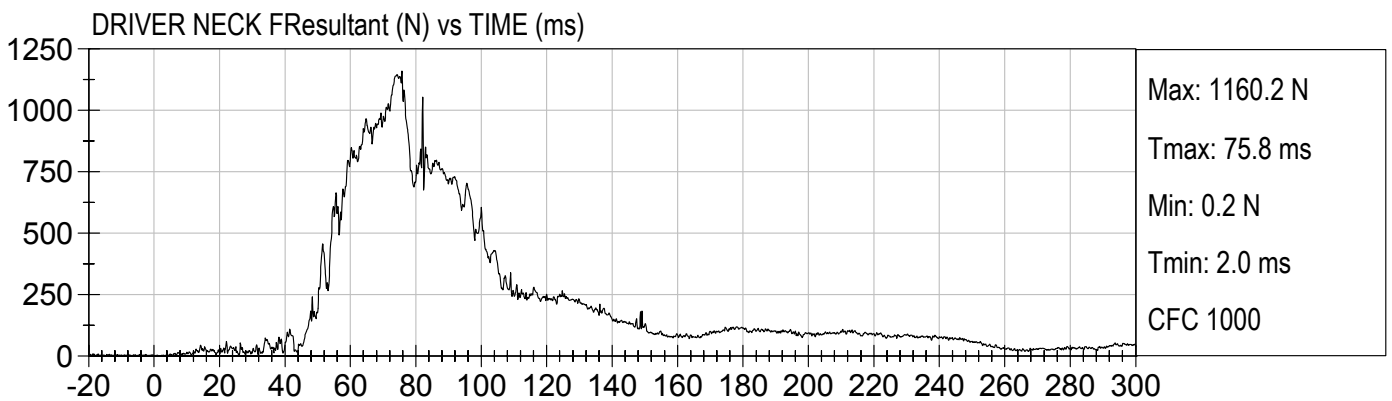
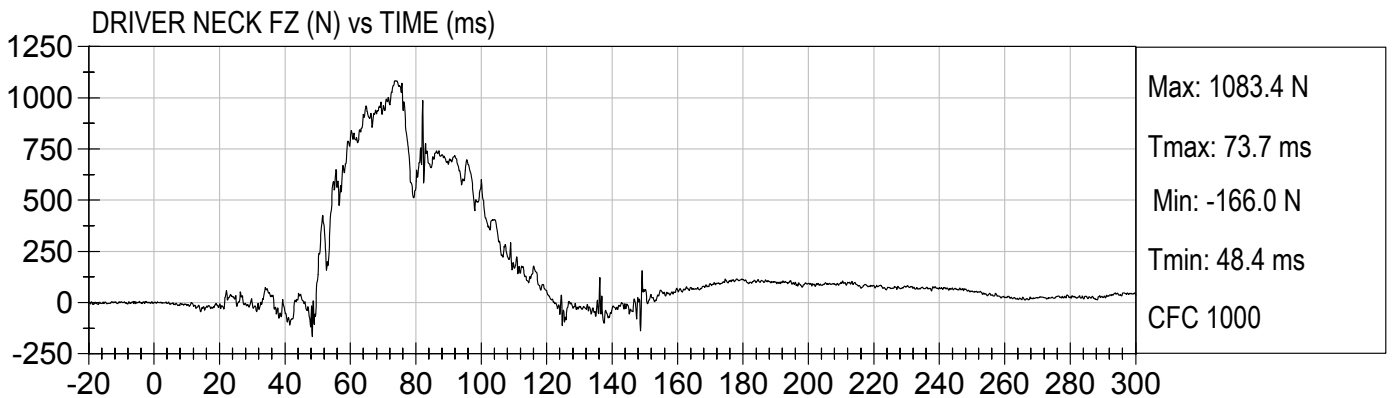
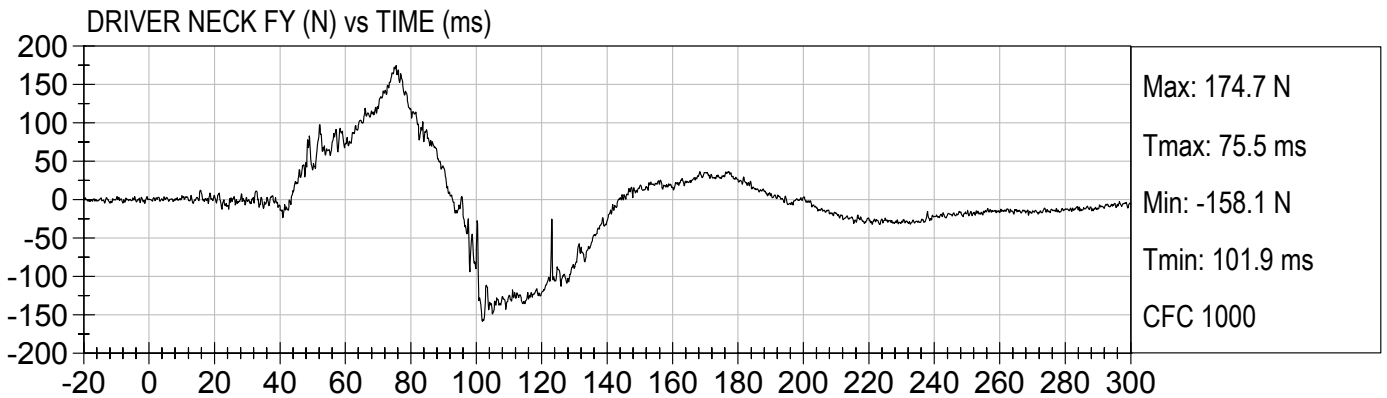
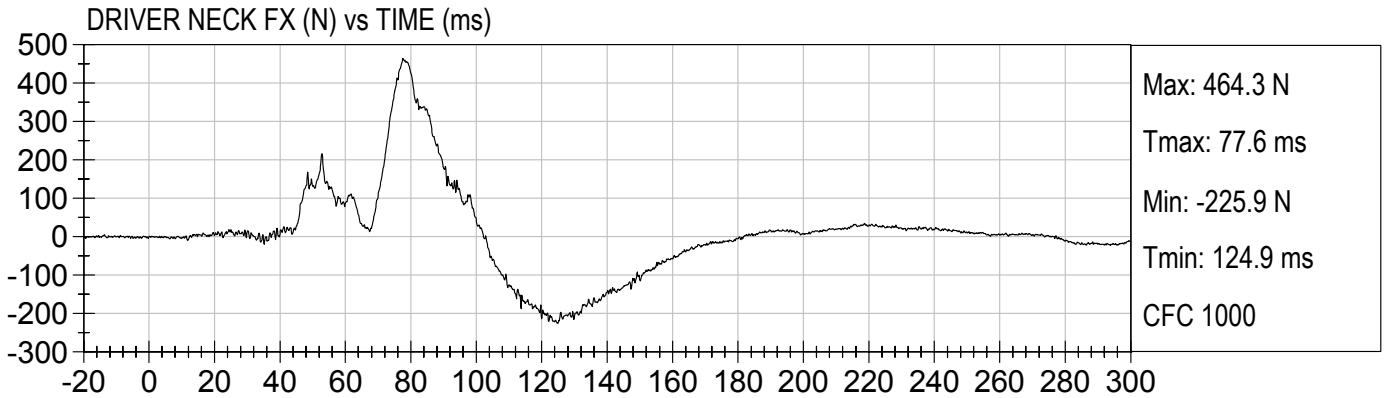


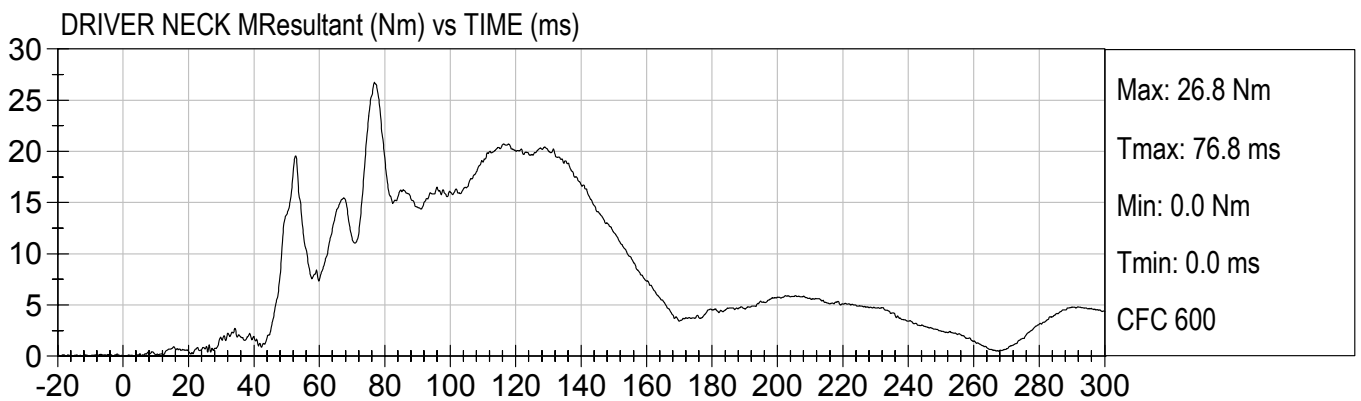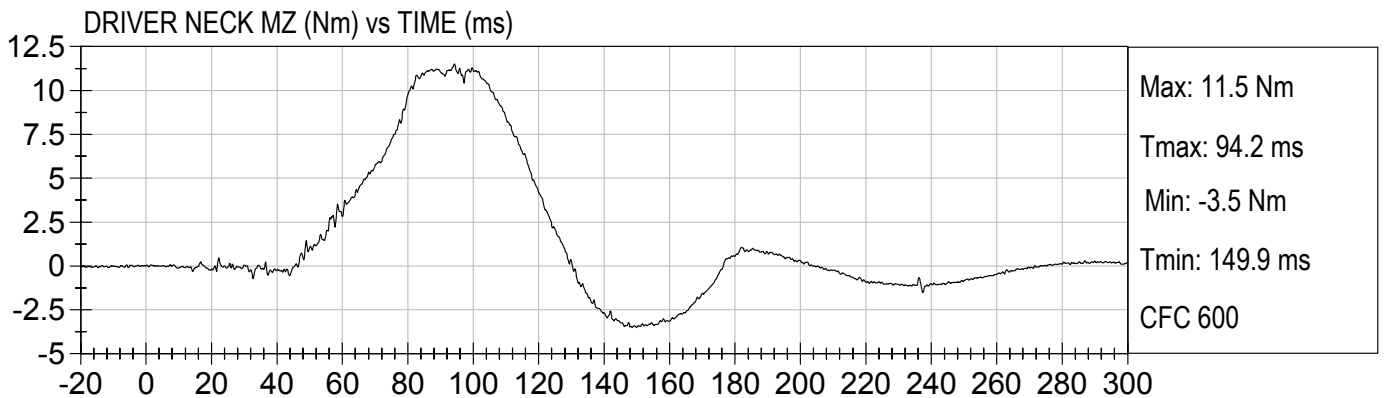
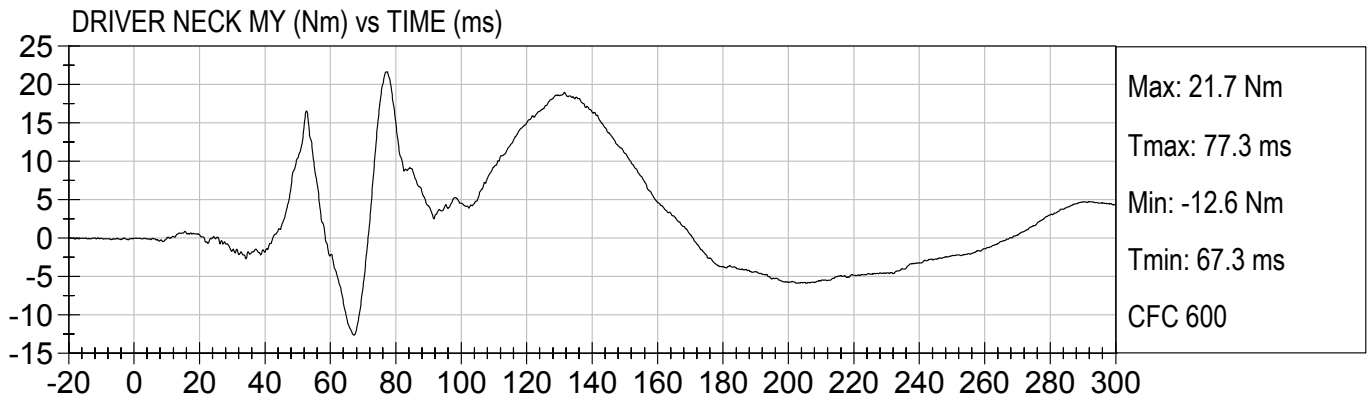
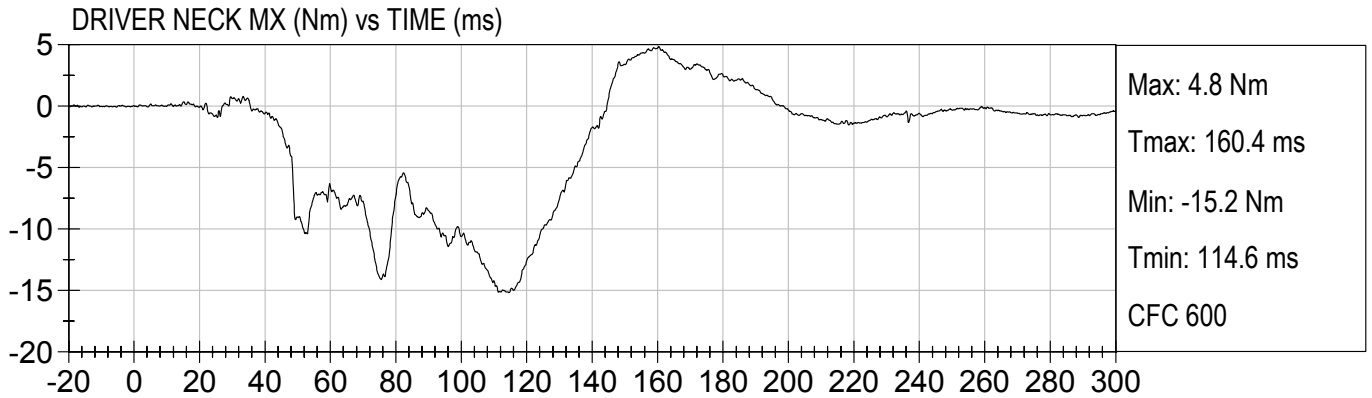


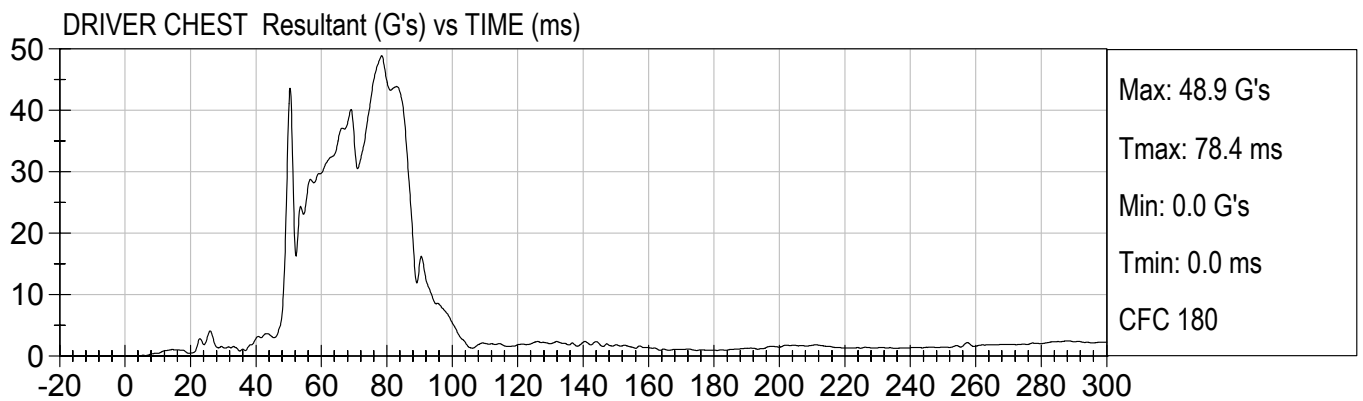
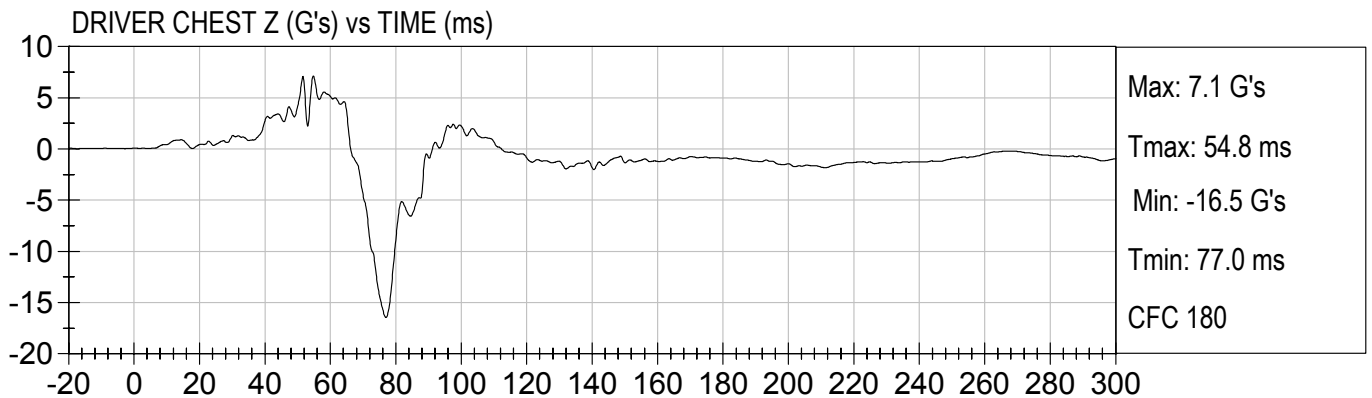
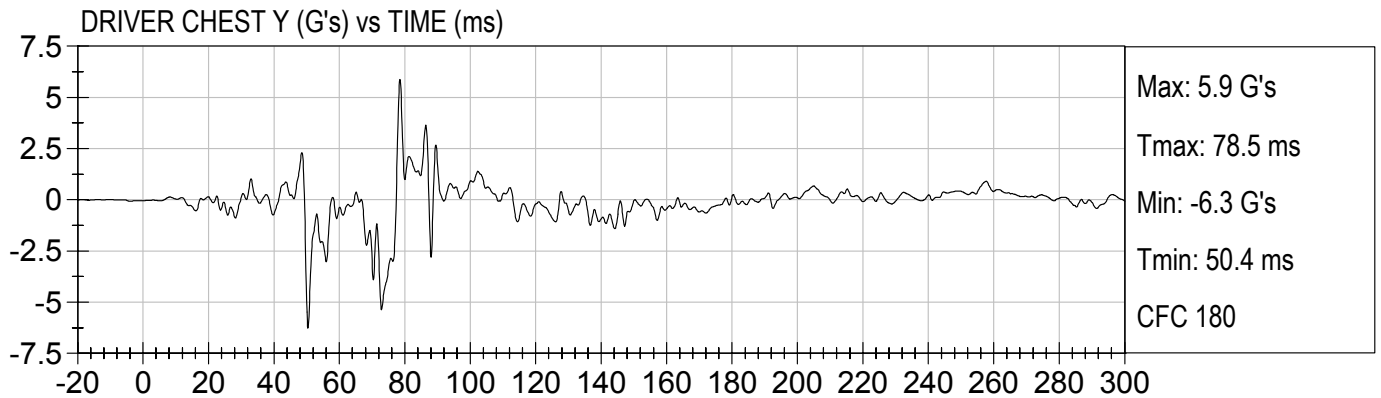
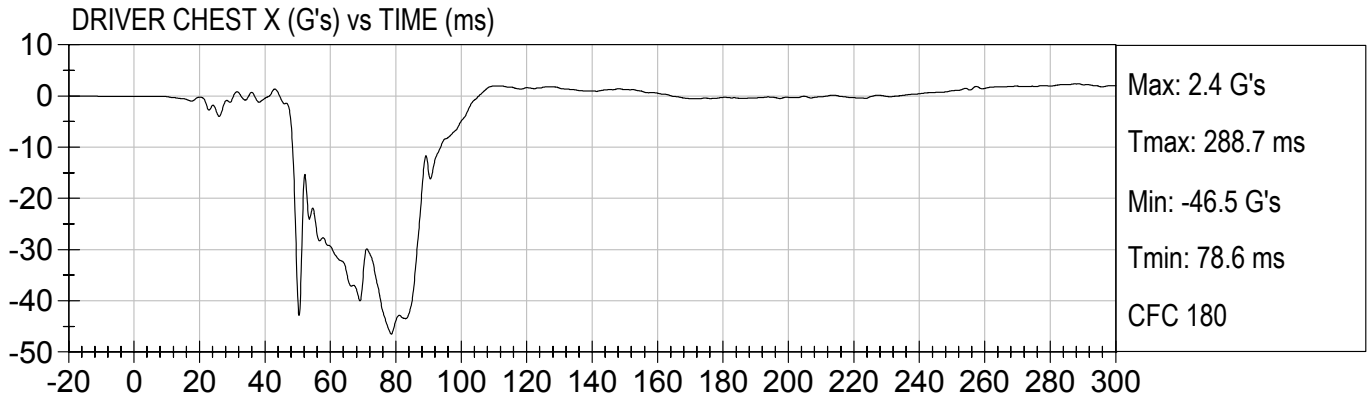


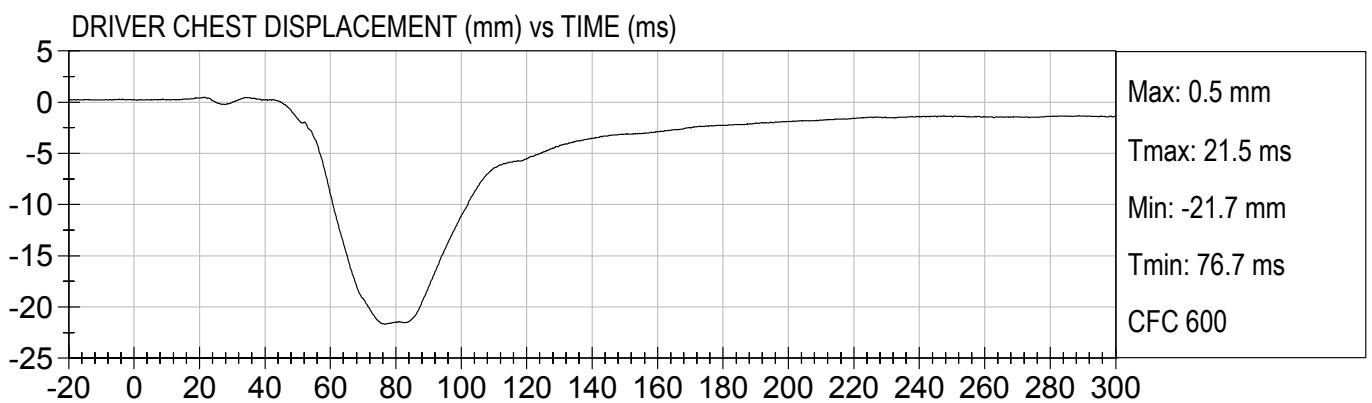
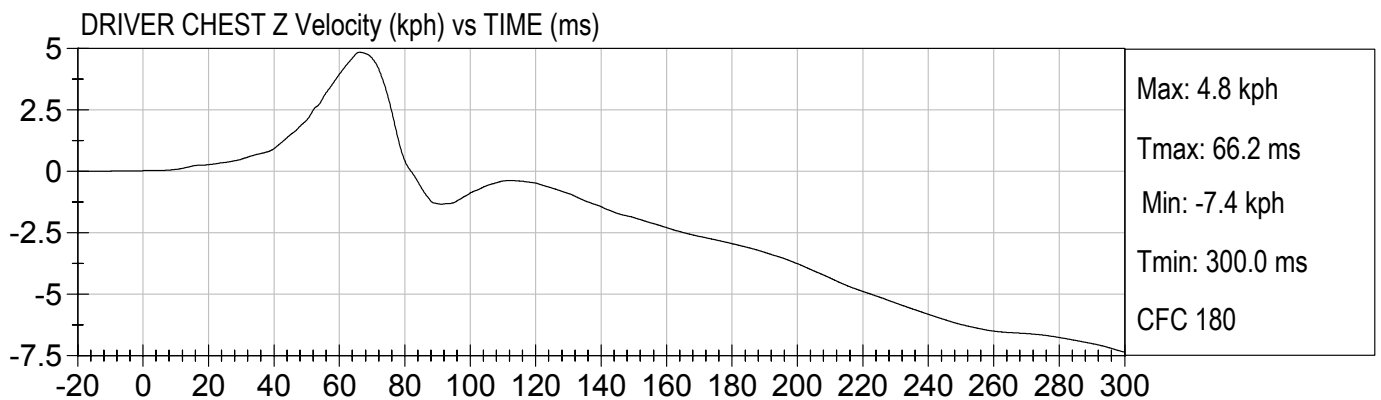
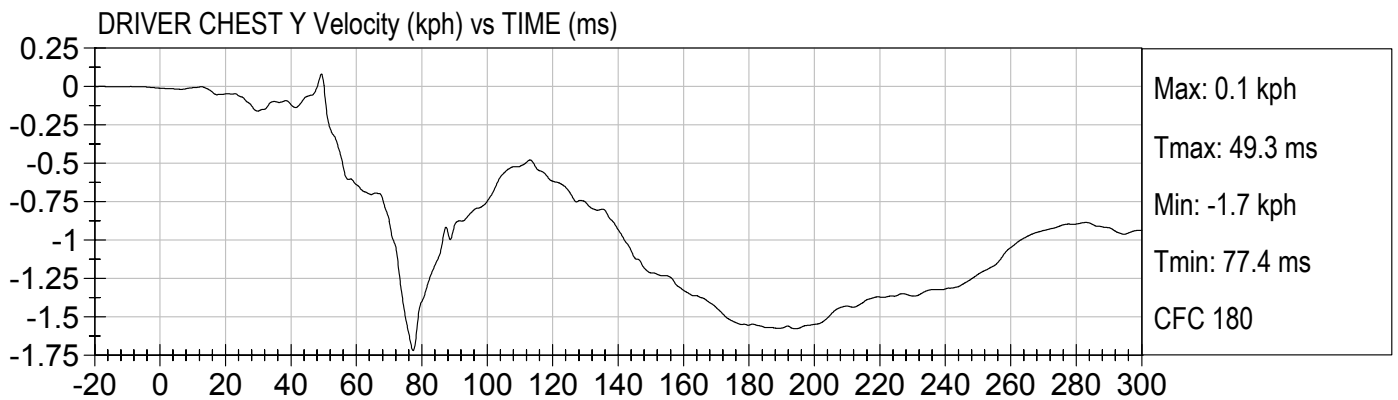
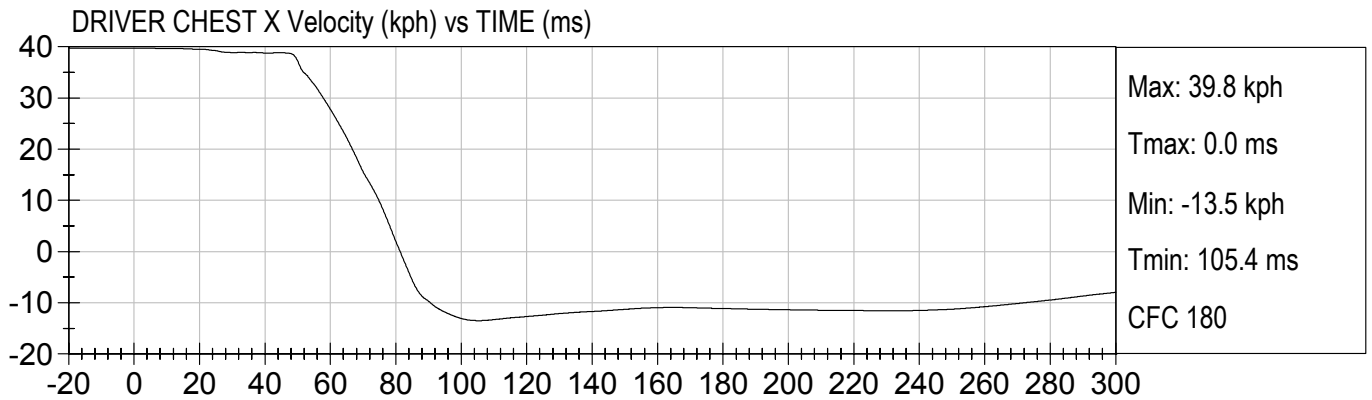




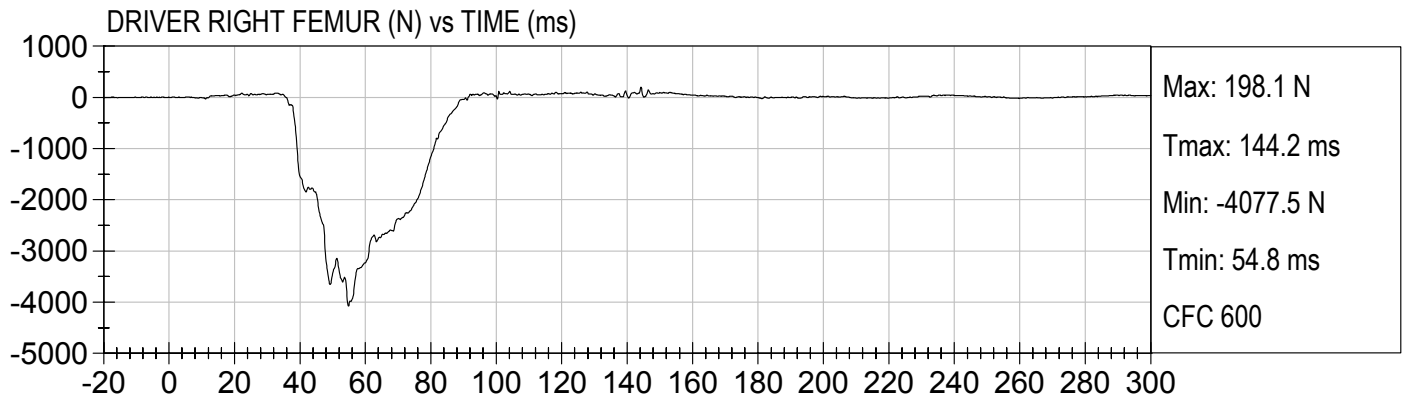
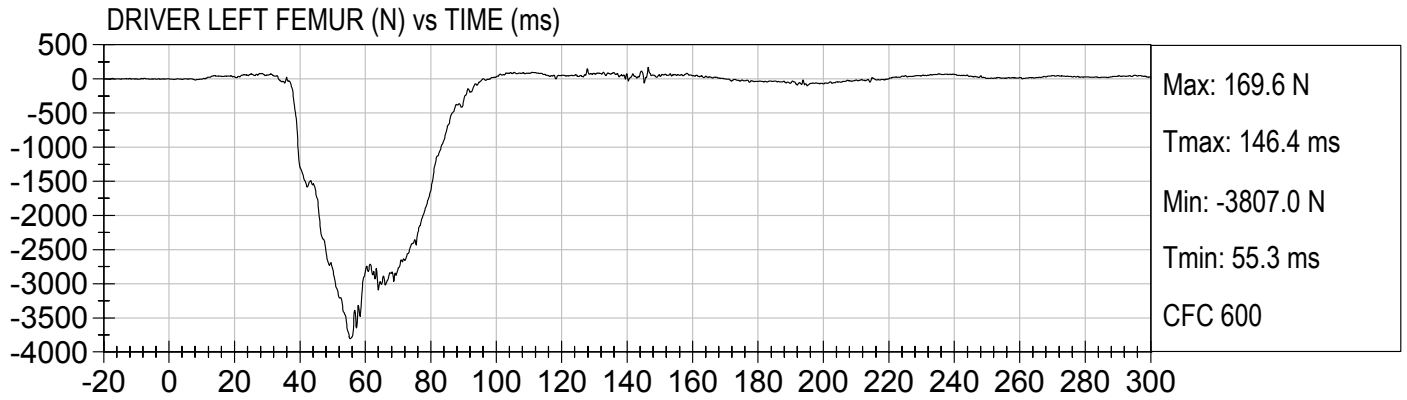


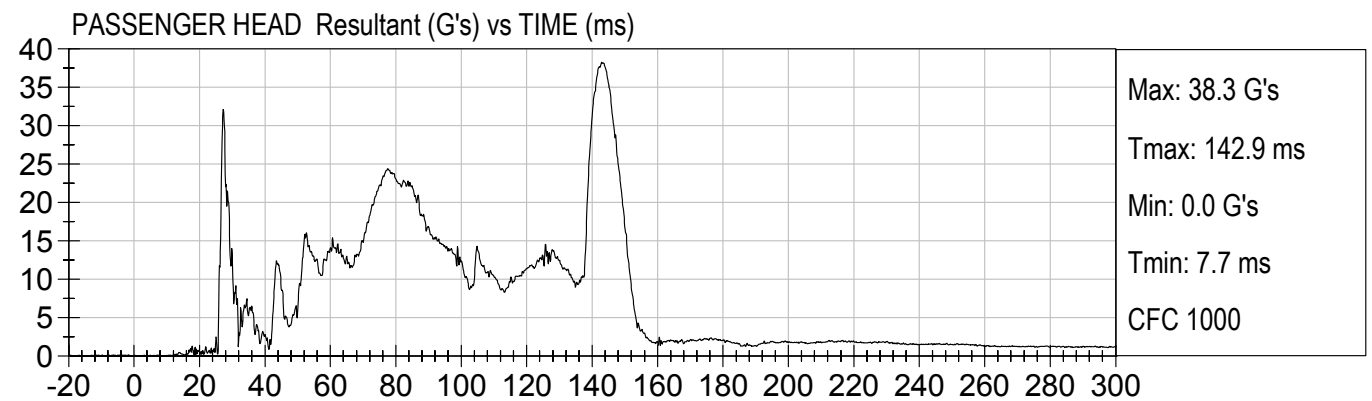
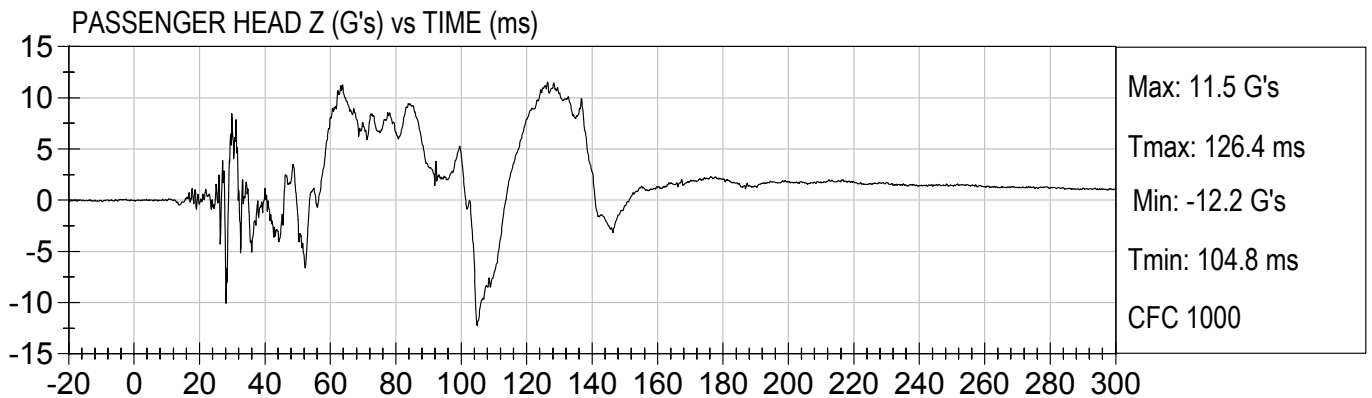
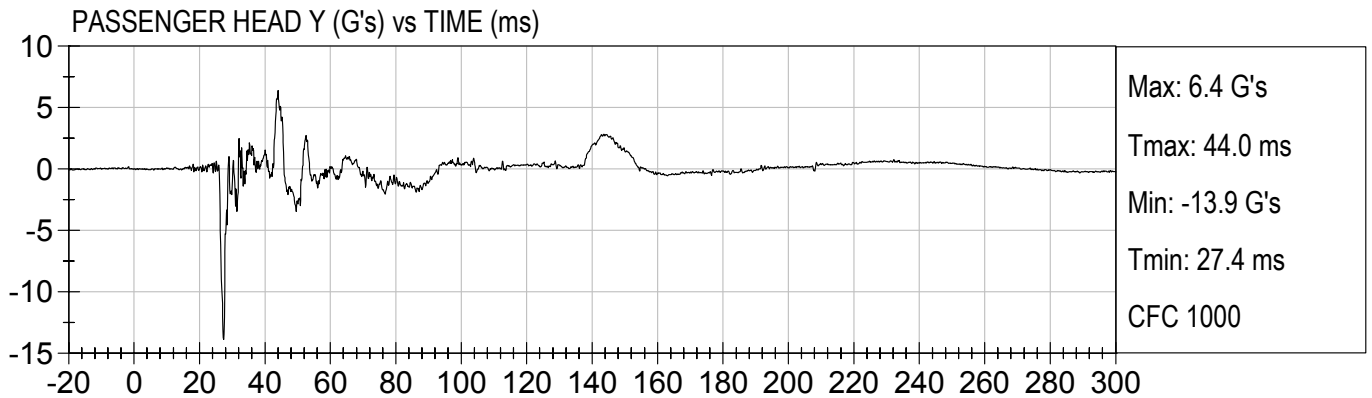
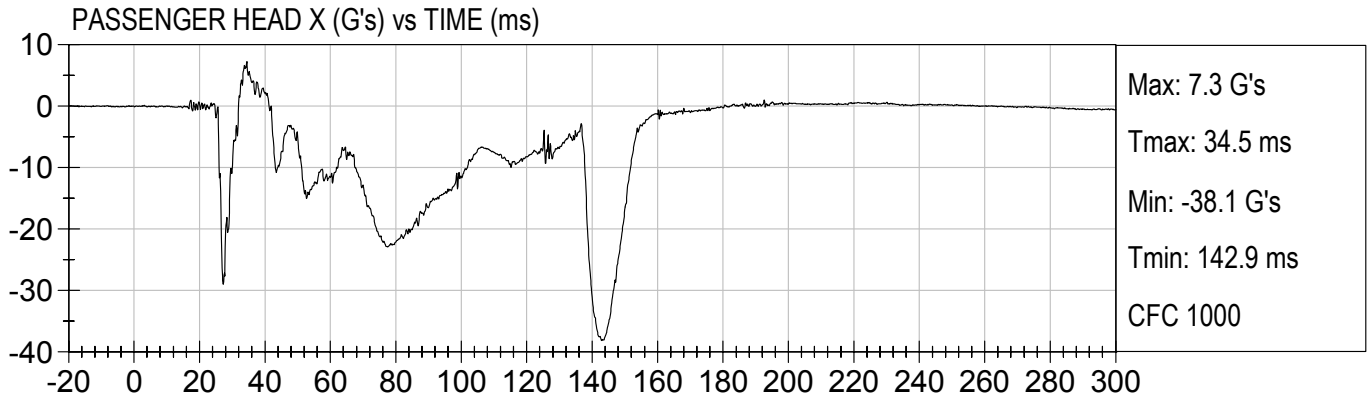


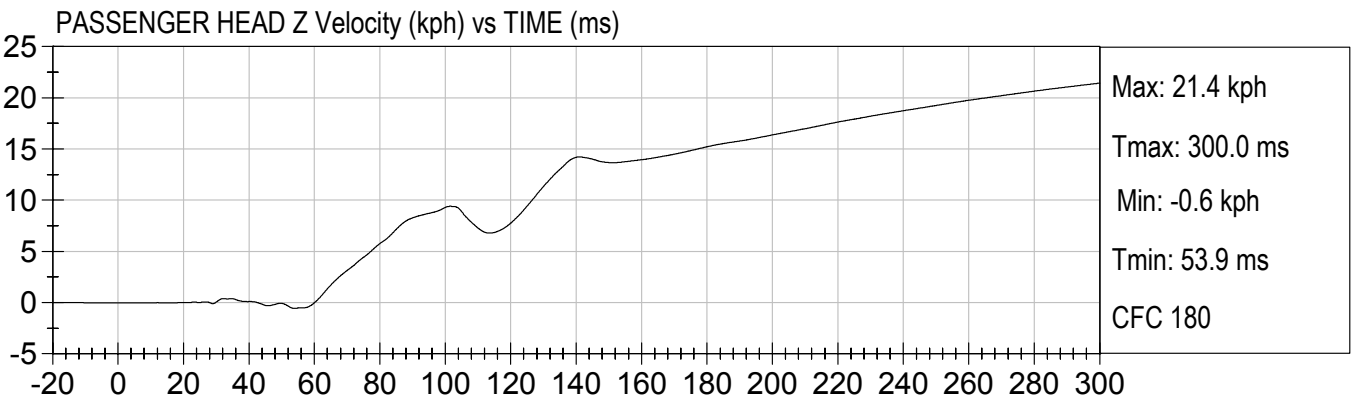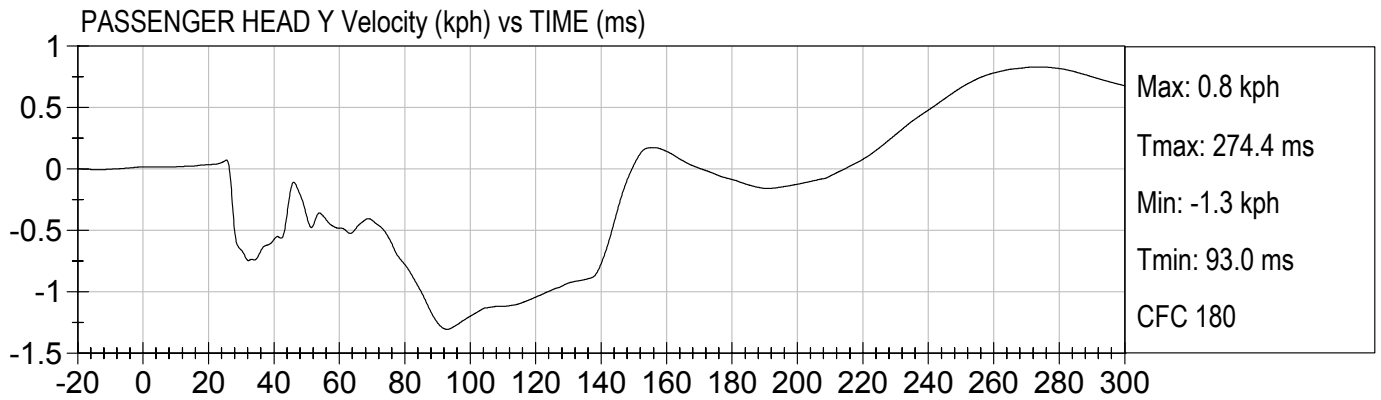
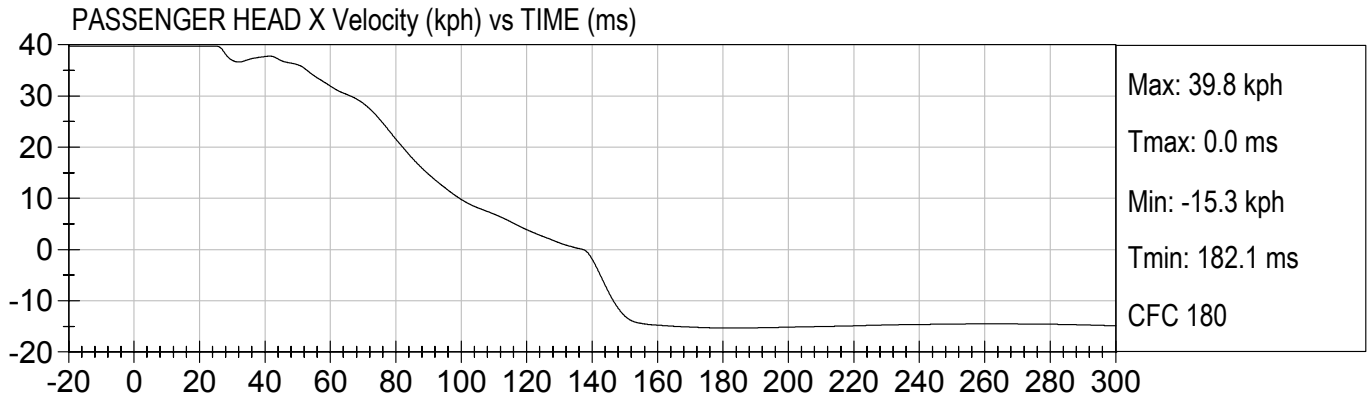


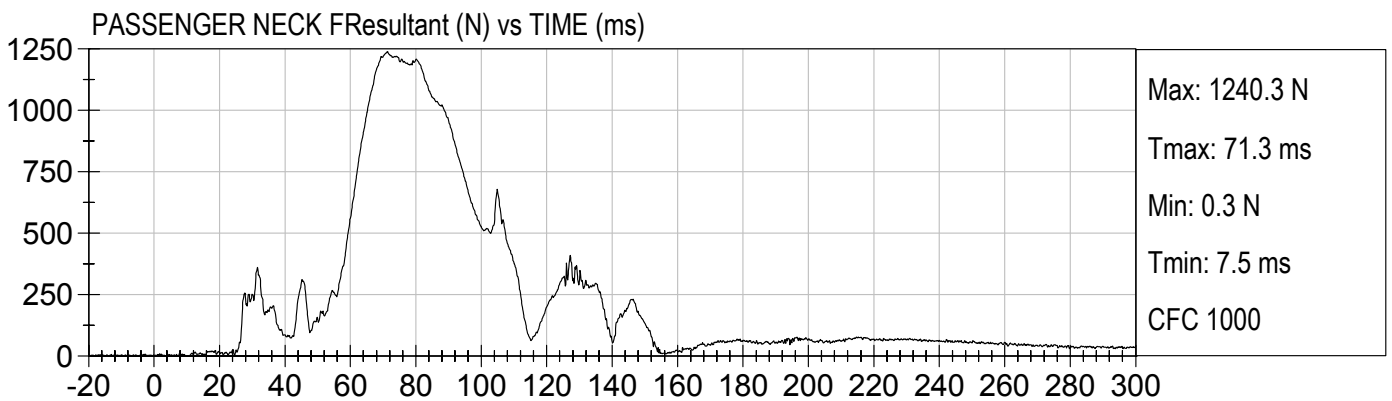
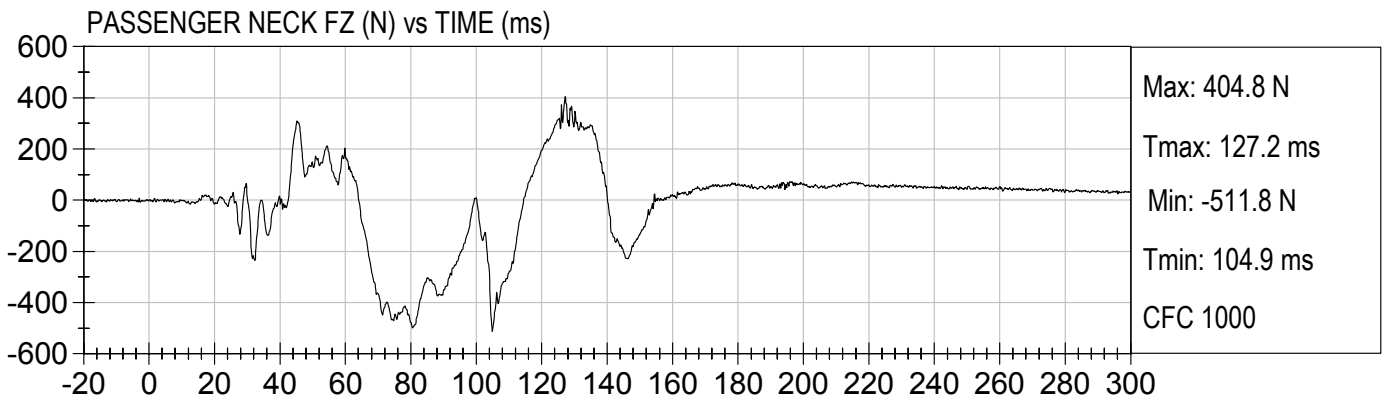
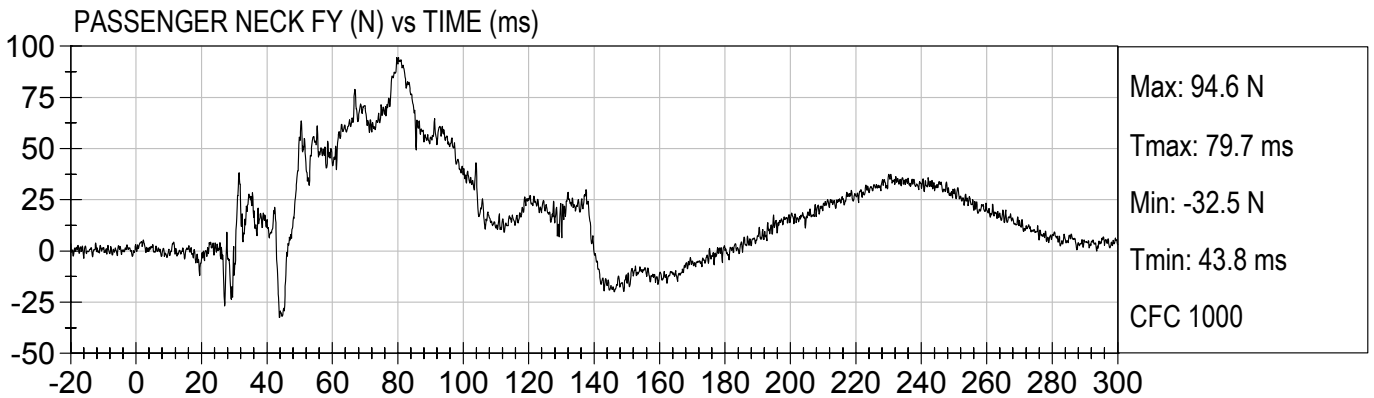
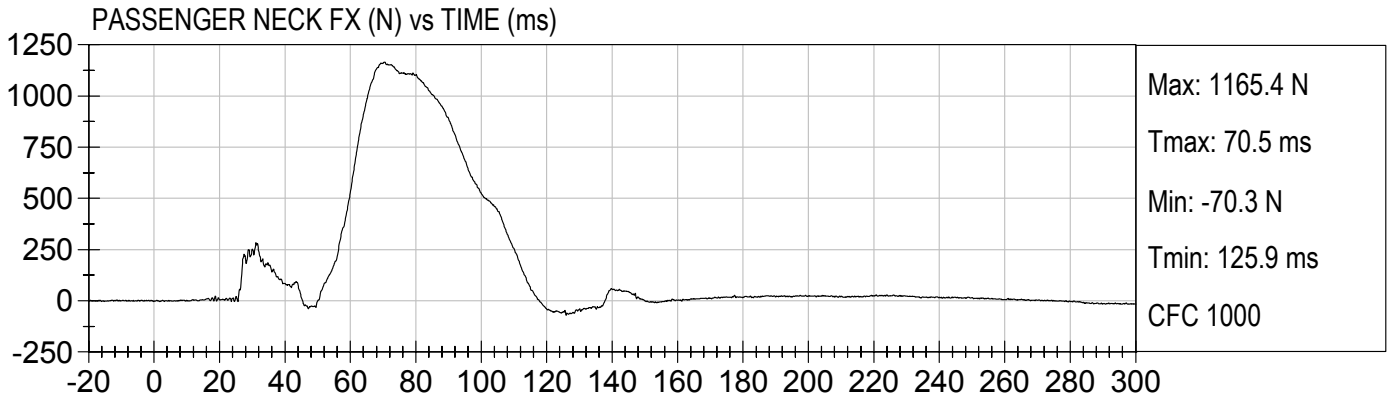


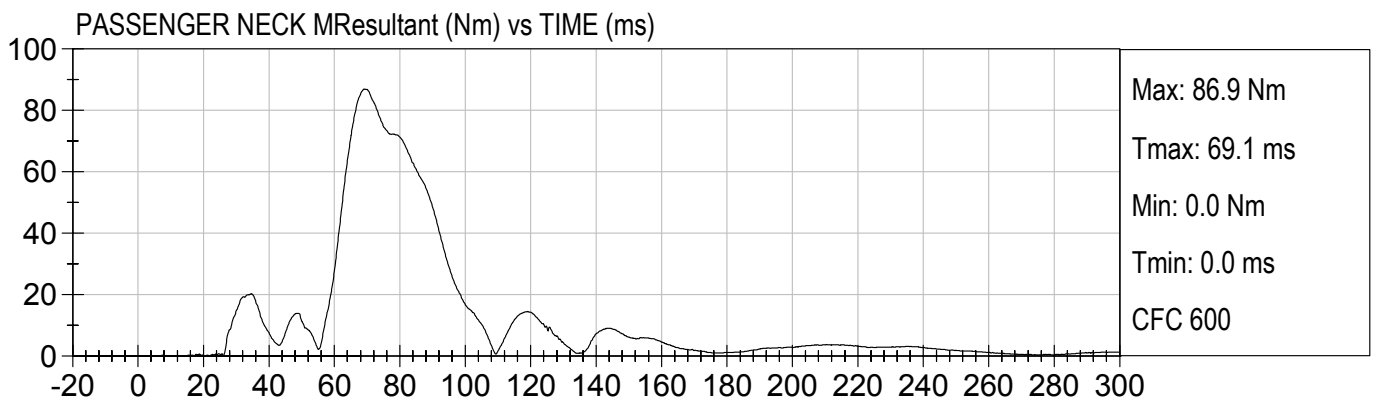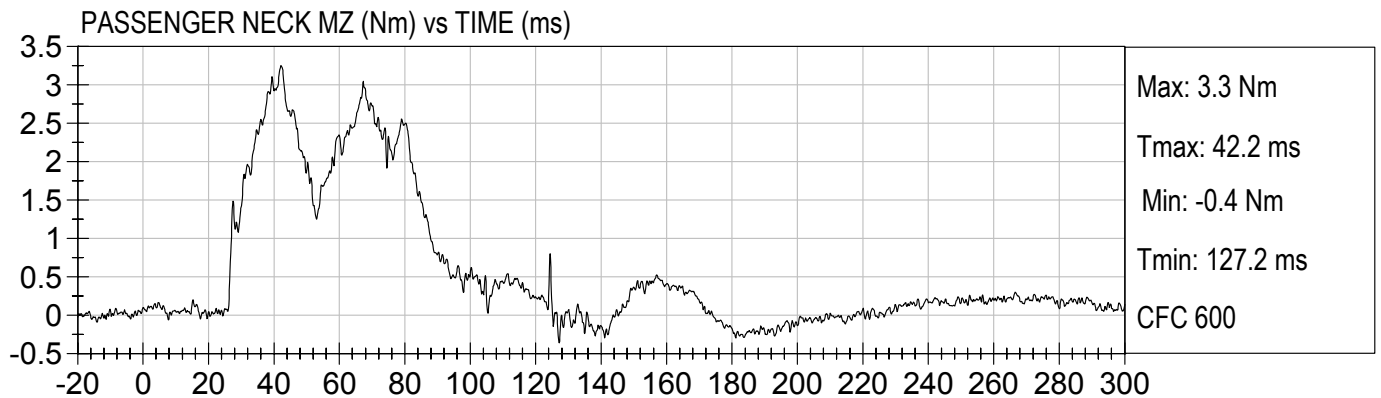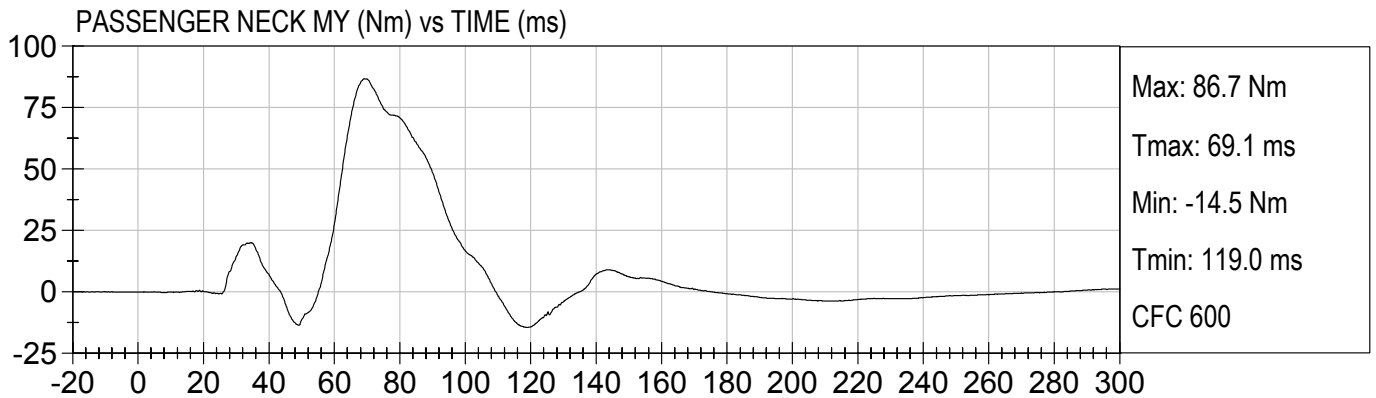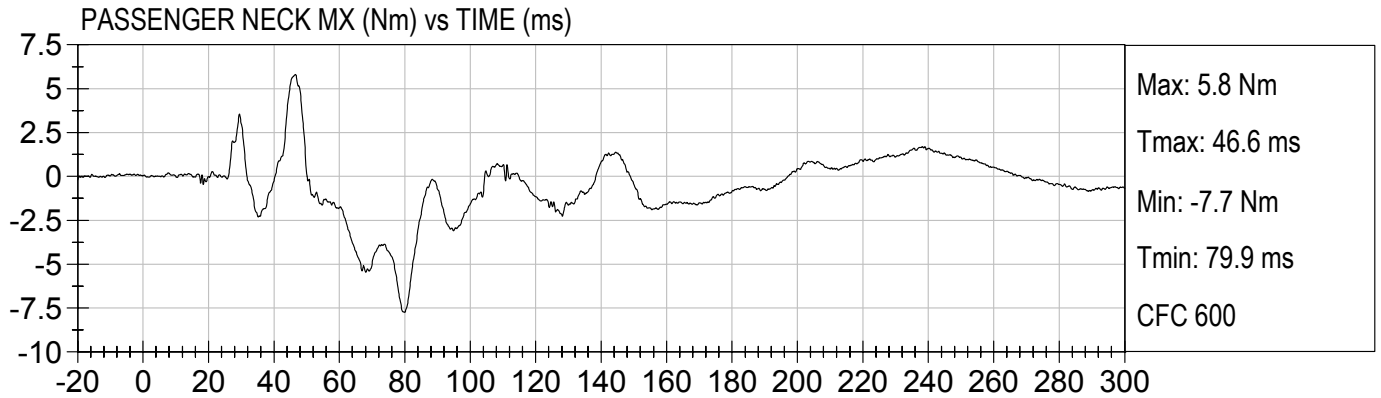

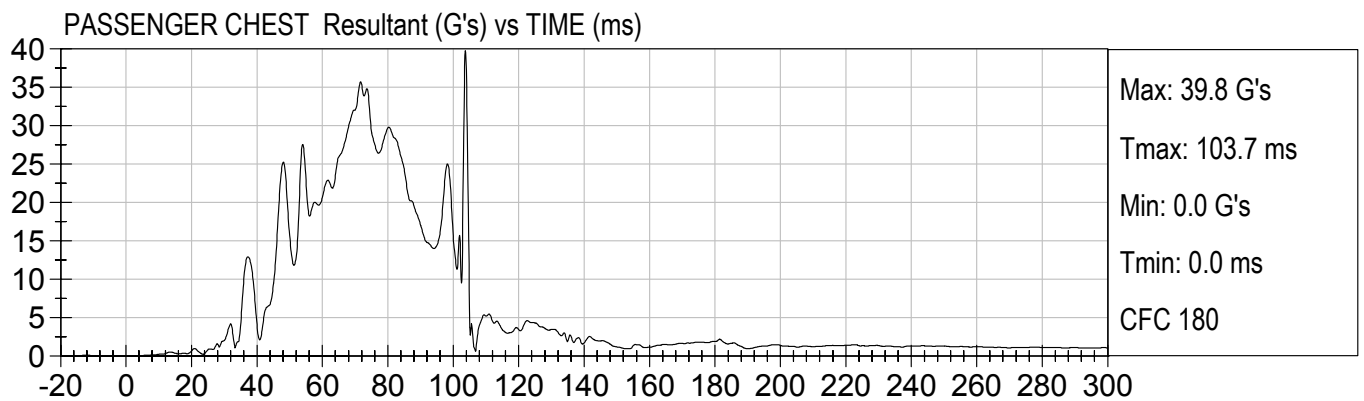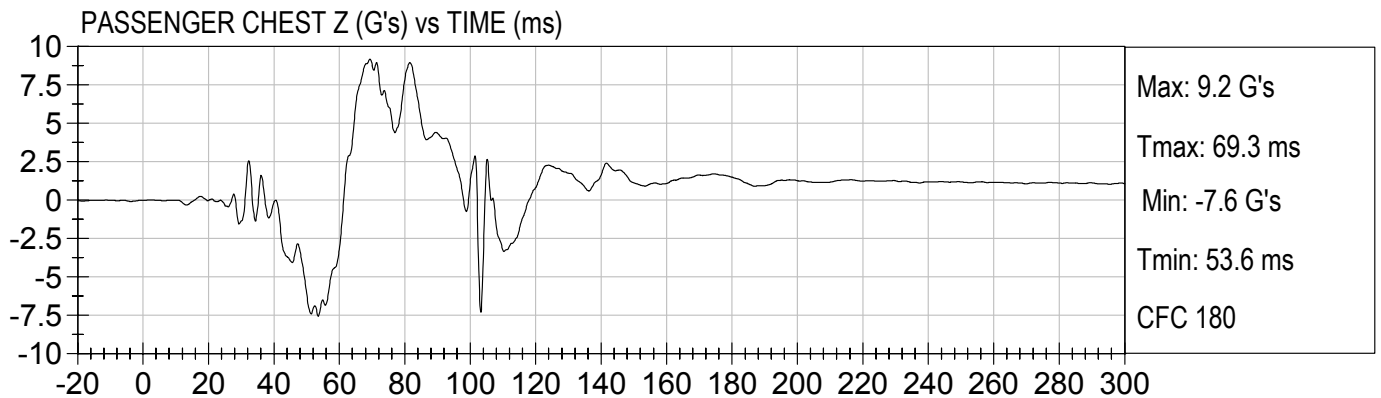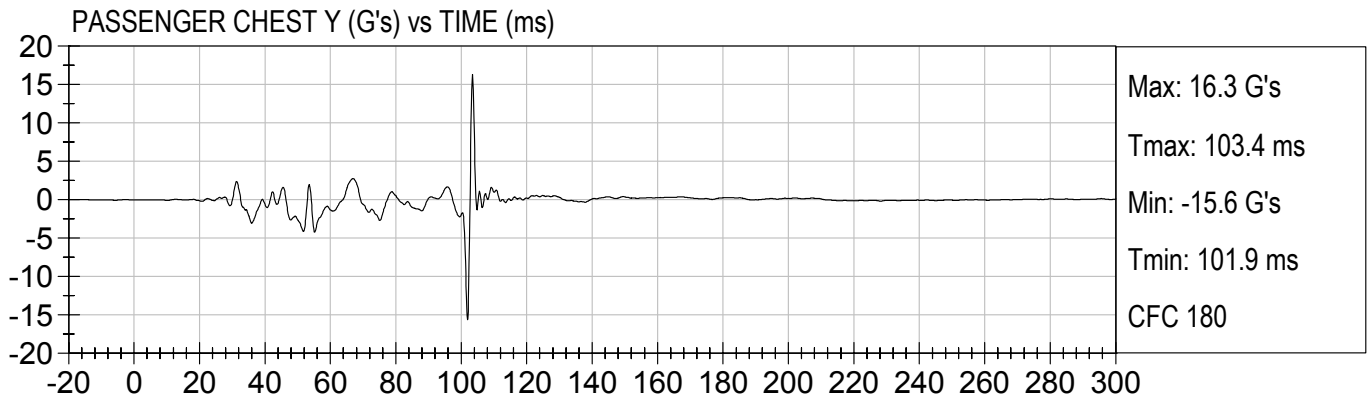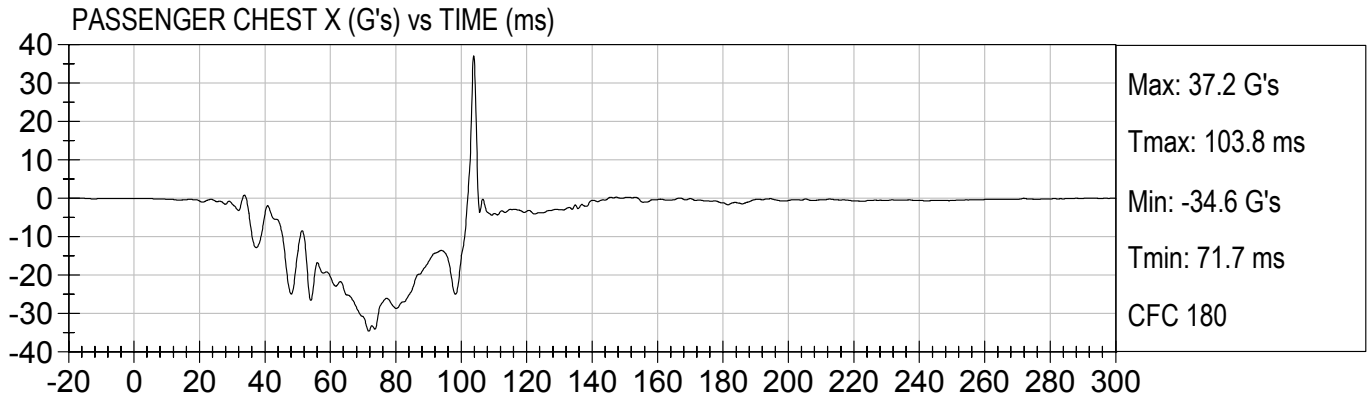

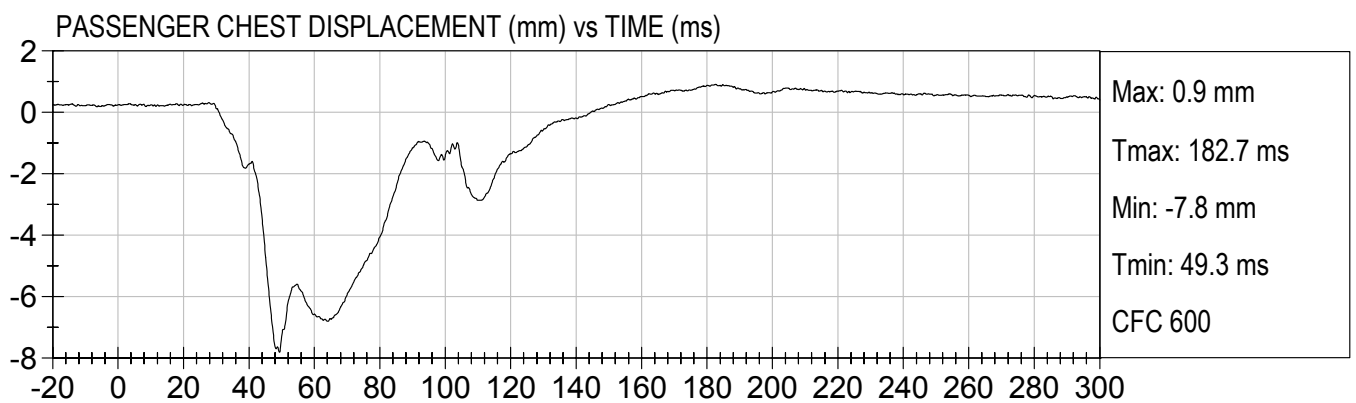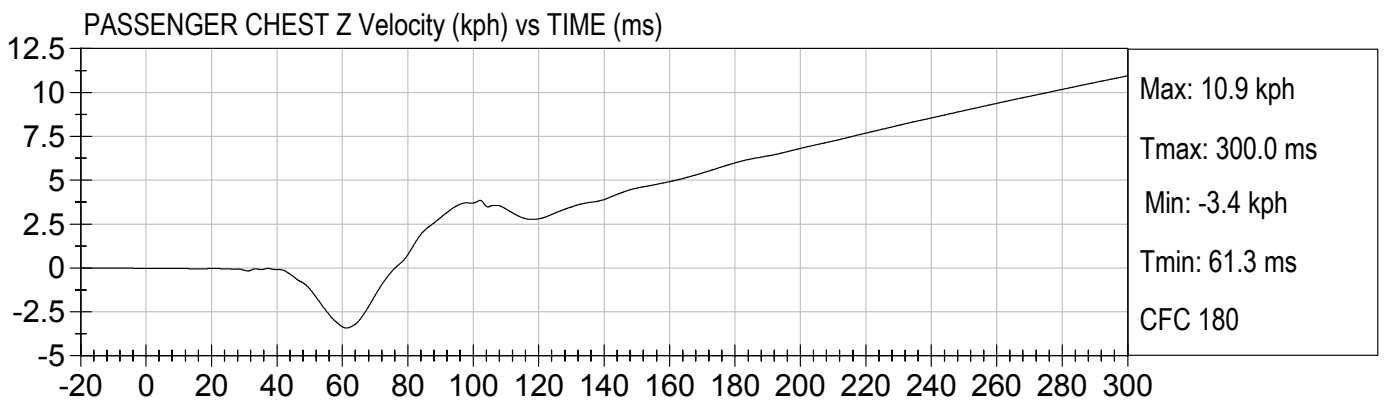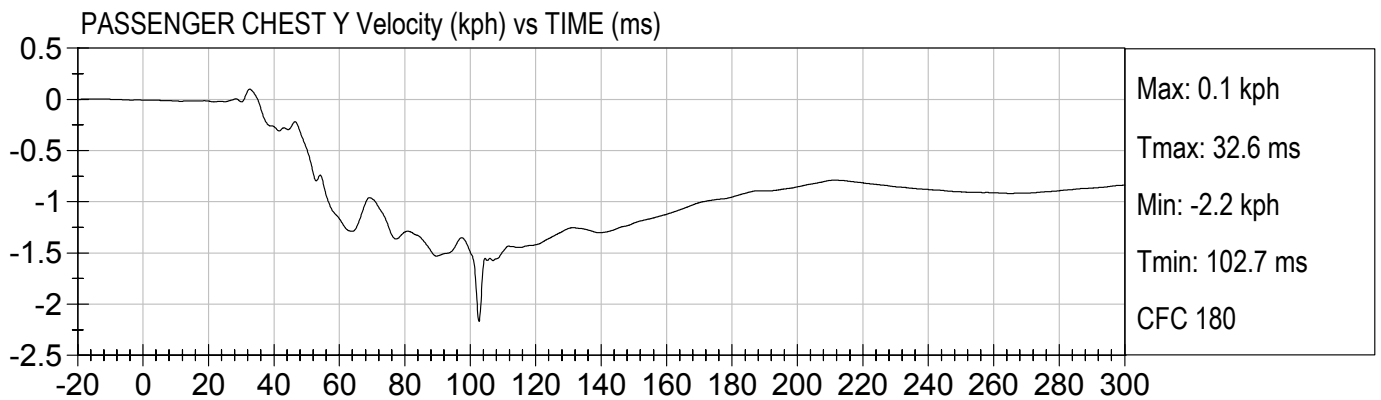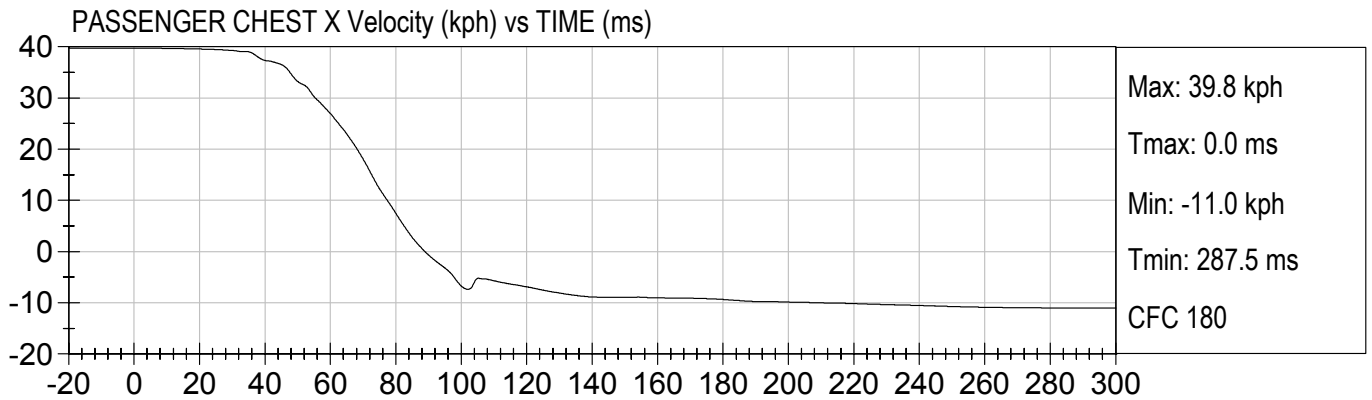


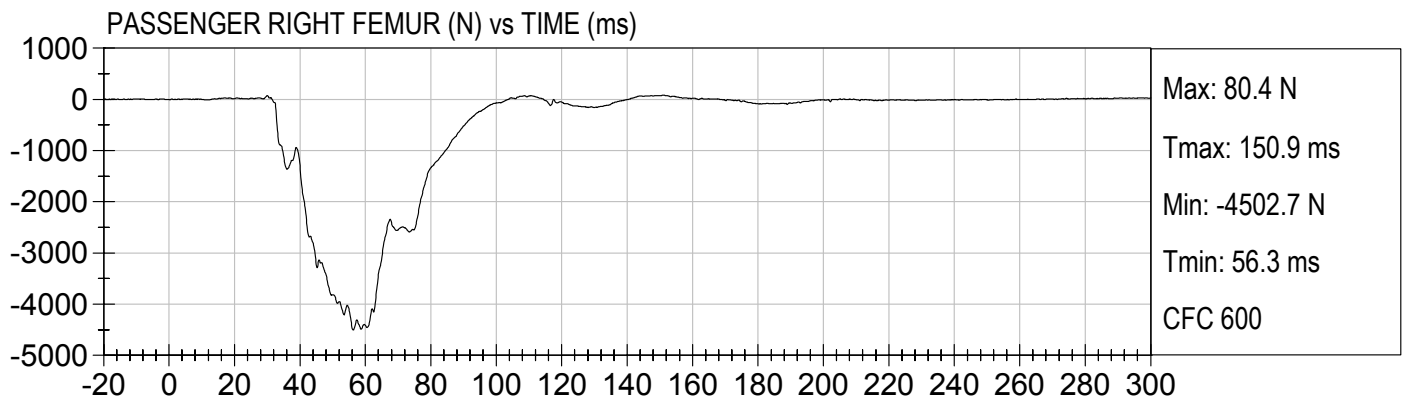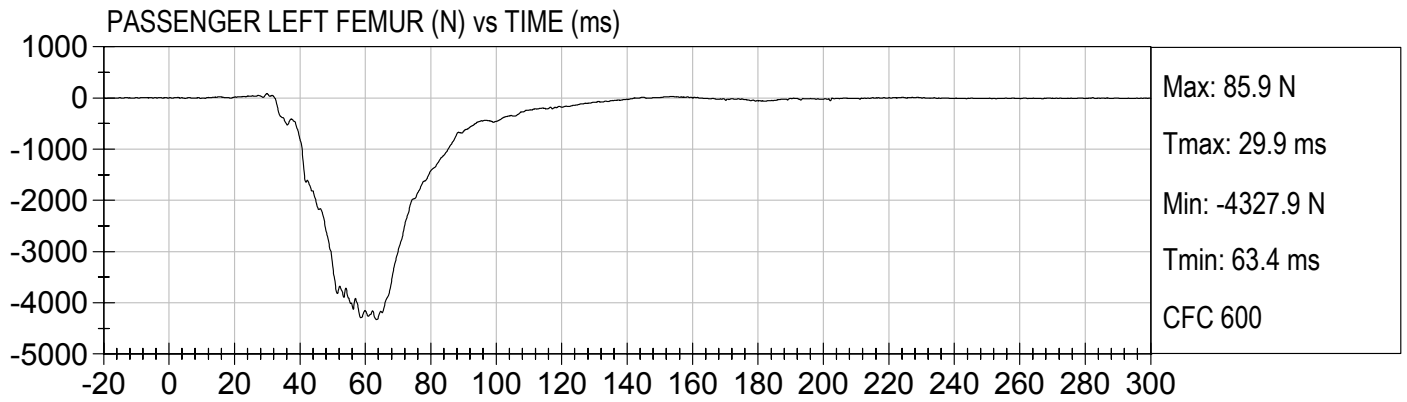

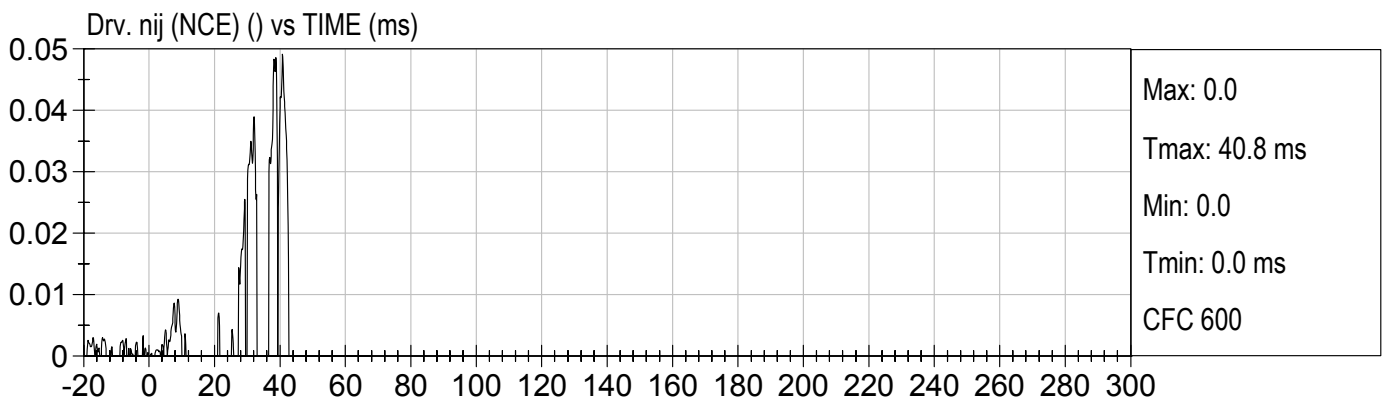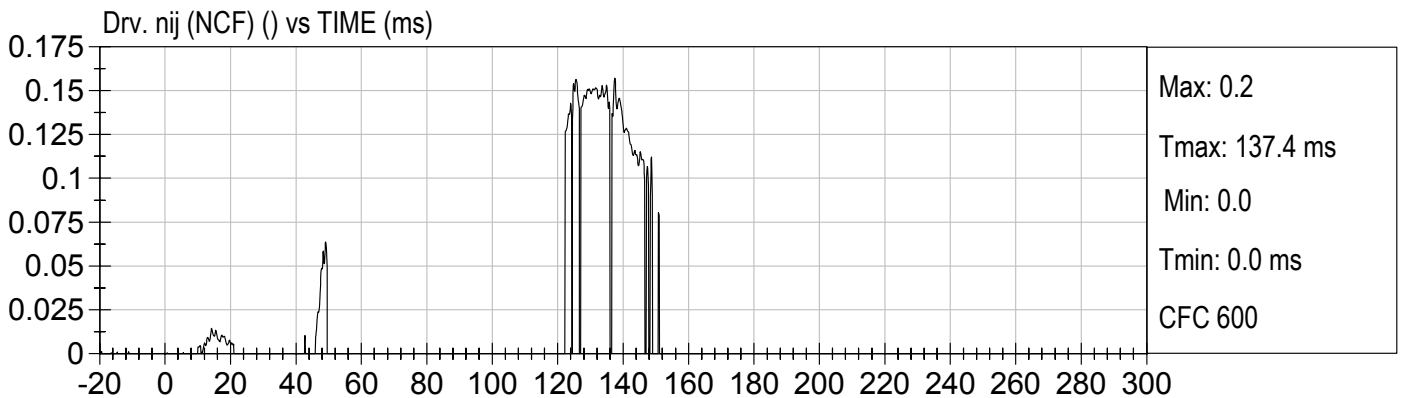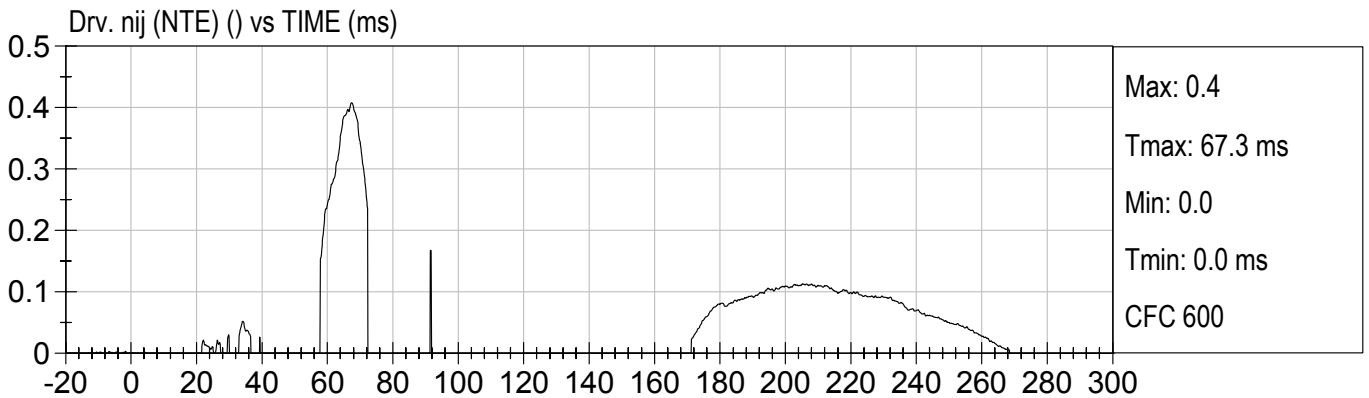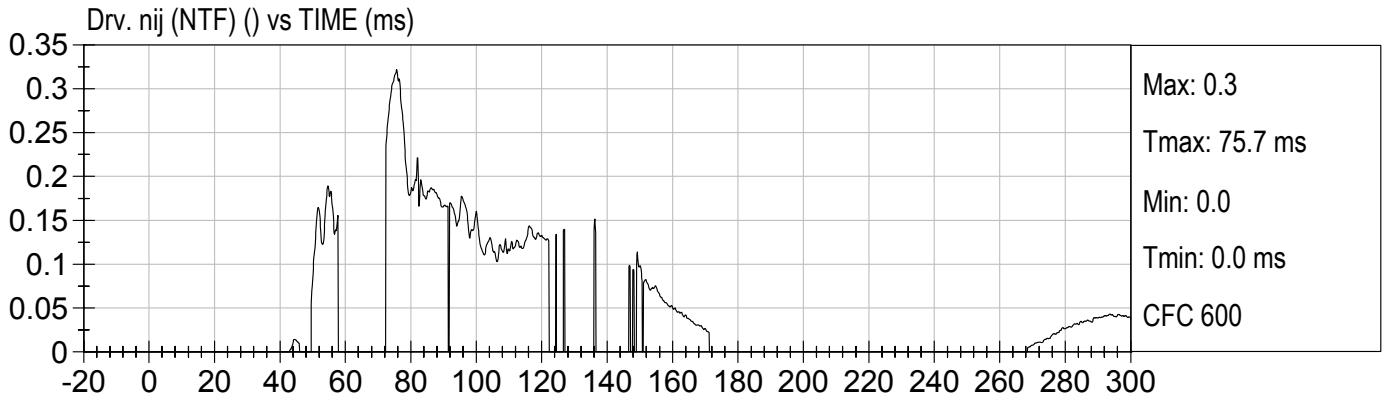





Pass. nij (NTF) () vs TIME (ms)

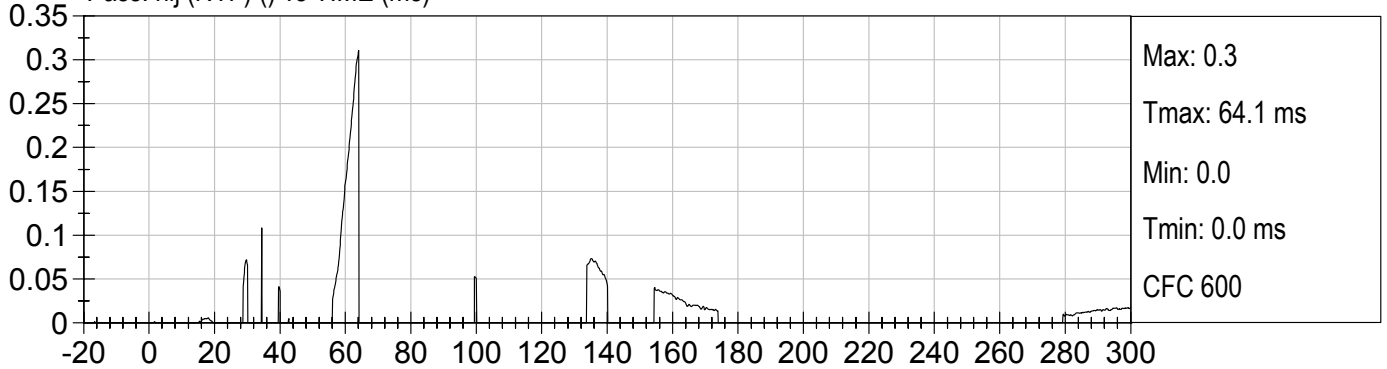


Pass. nij (NTE) () vs TIME (ms)


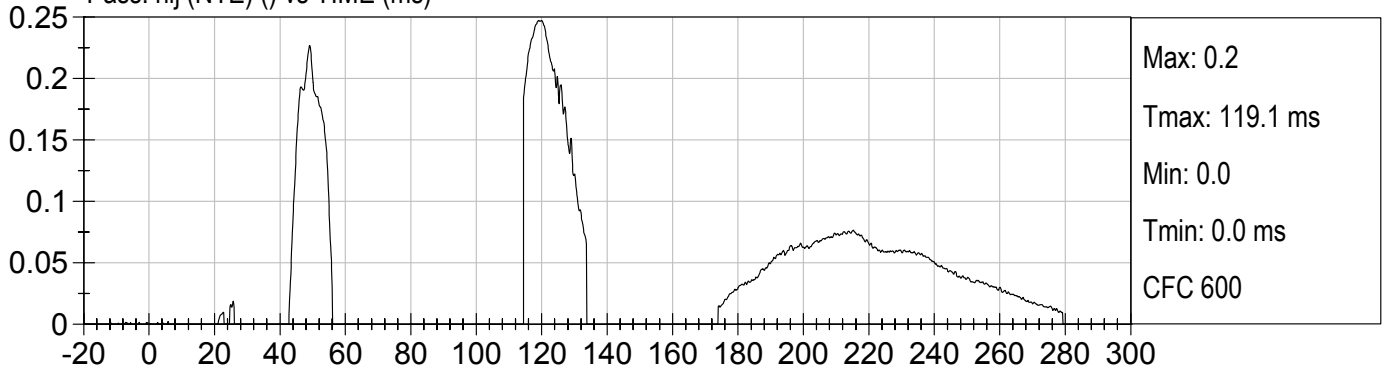






Pass. nij (NCF) () vs TIME (ms)




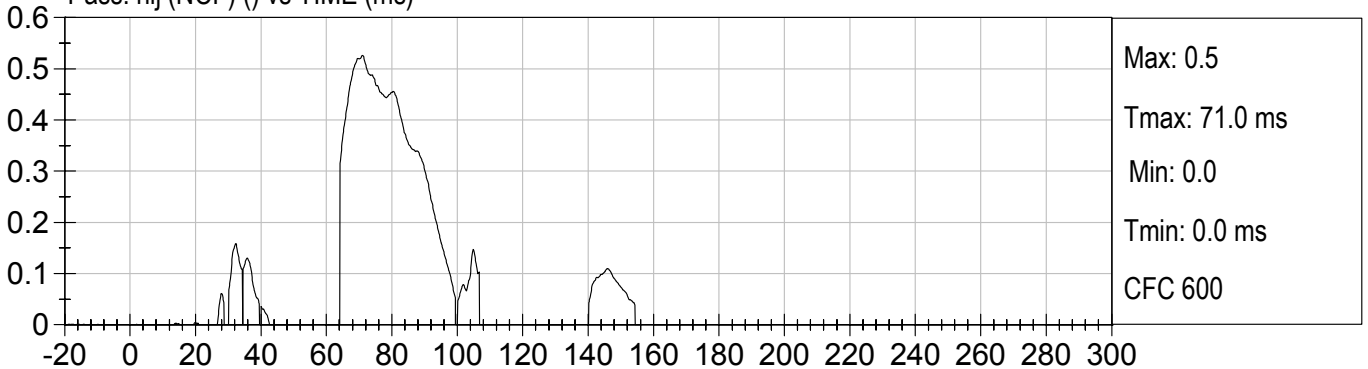






Pass. nij (NCE) () vs TIME (ms)




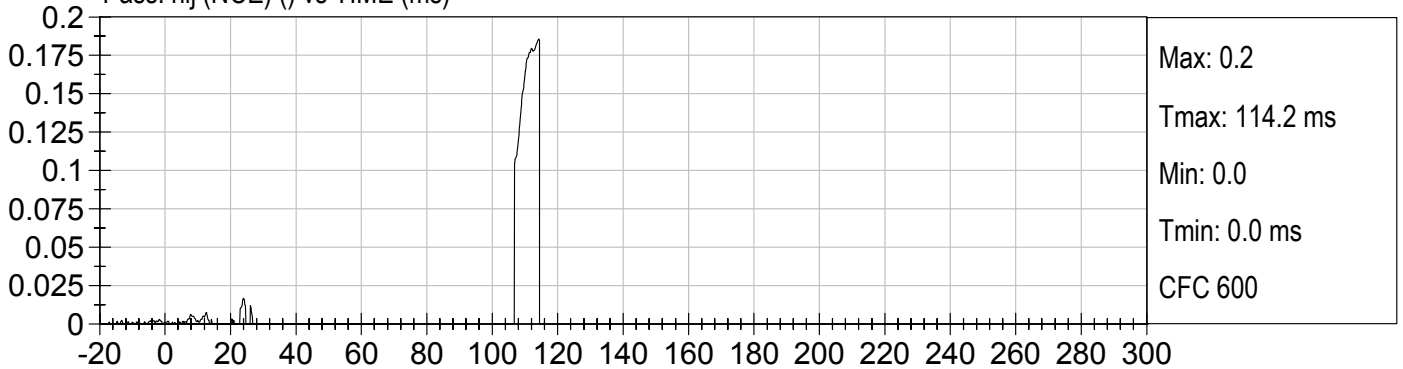




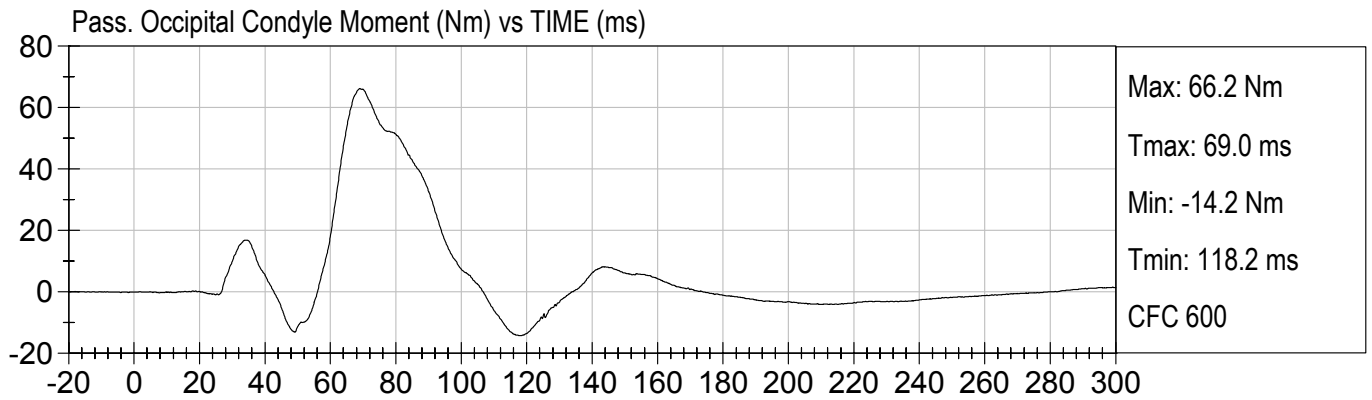
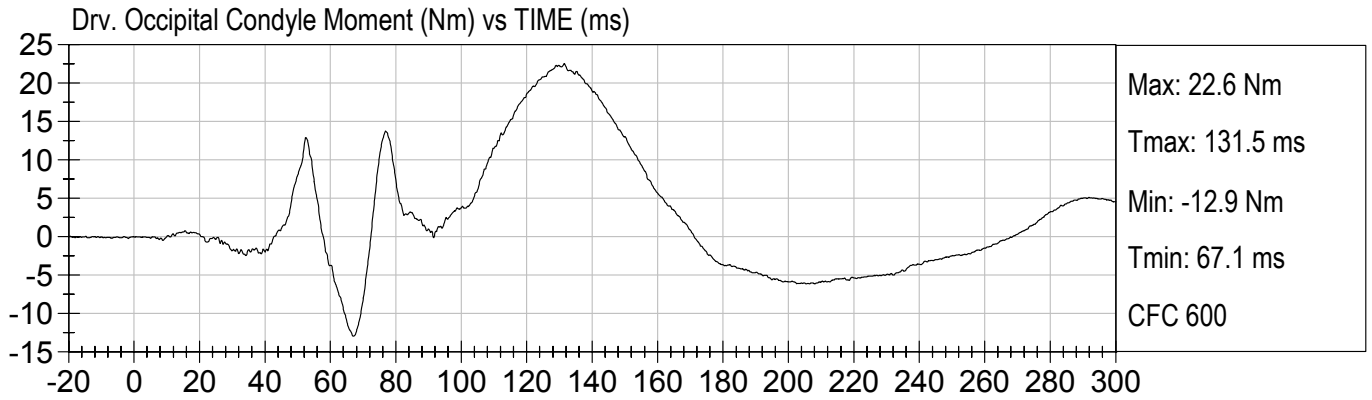


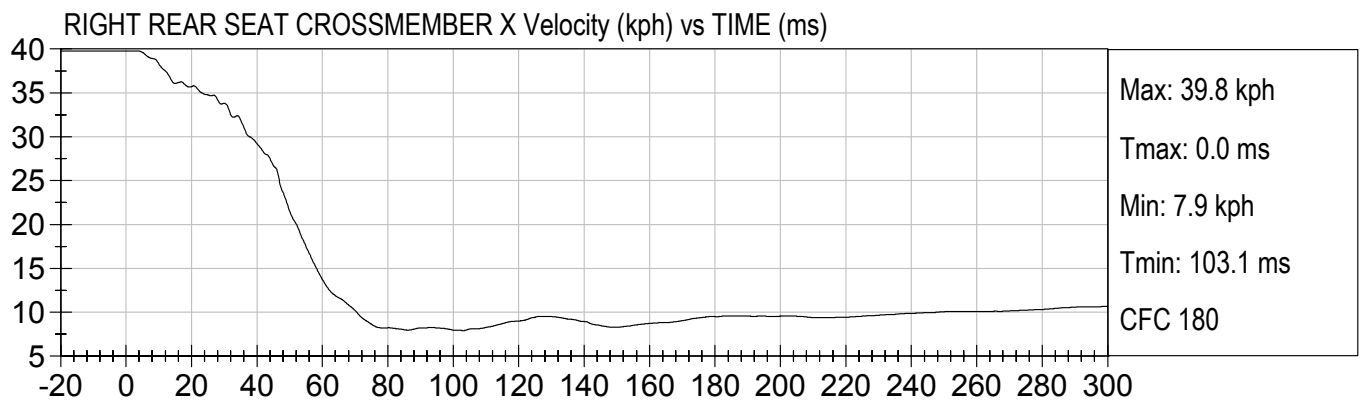
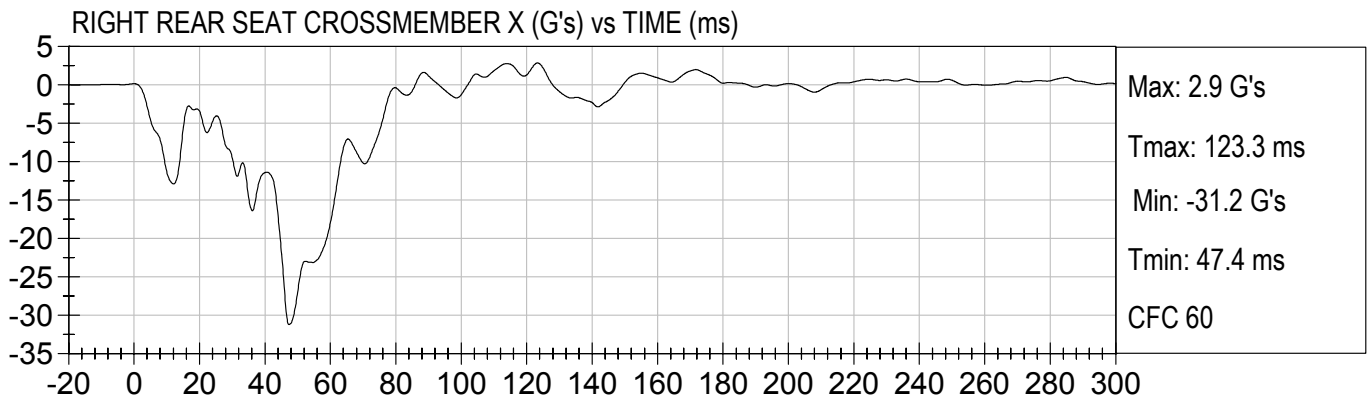
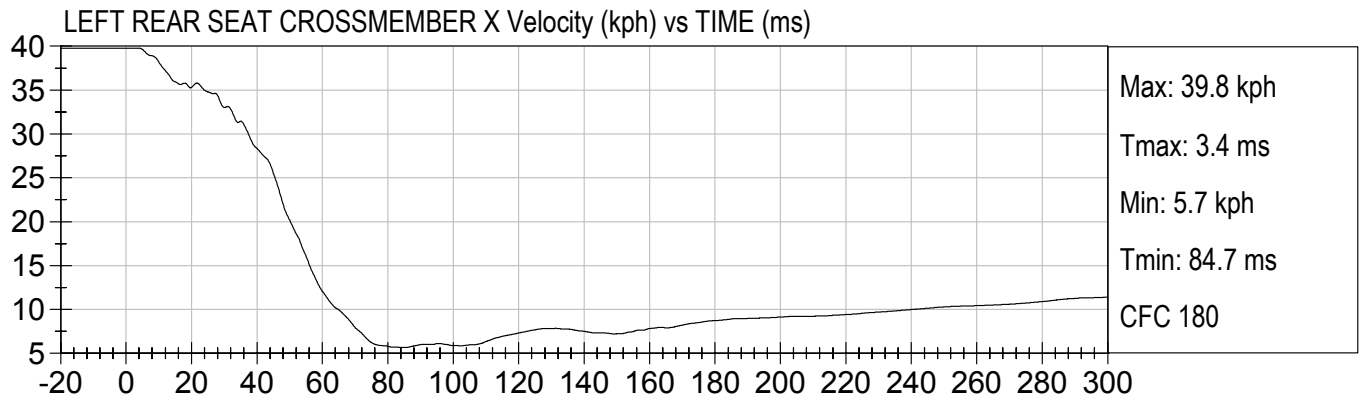
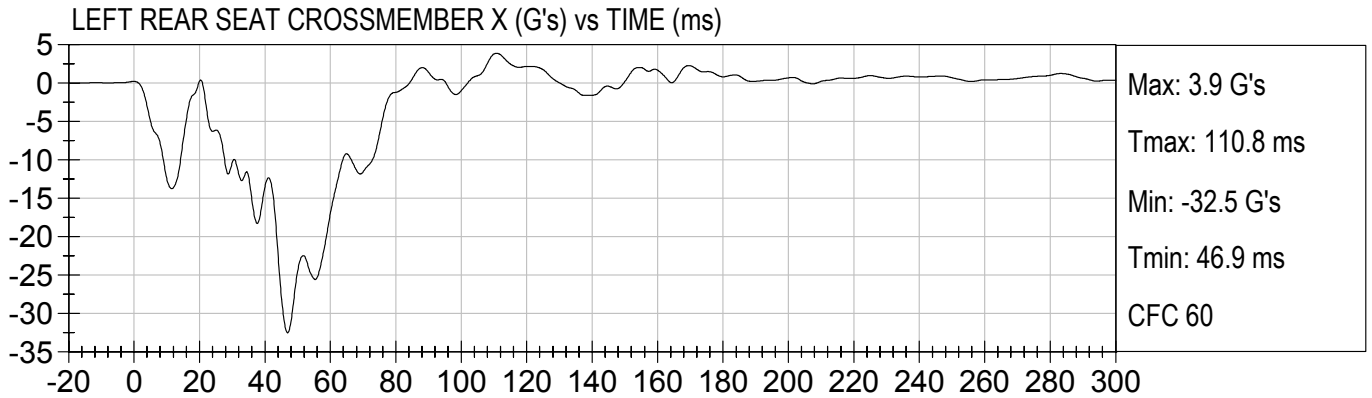


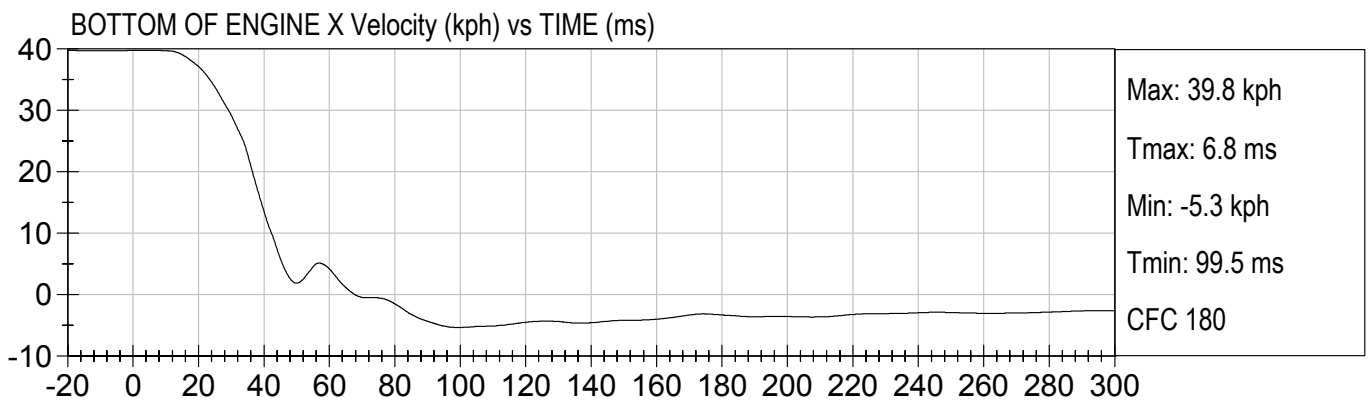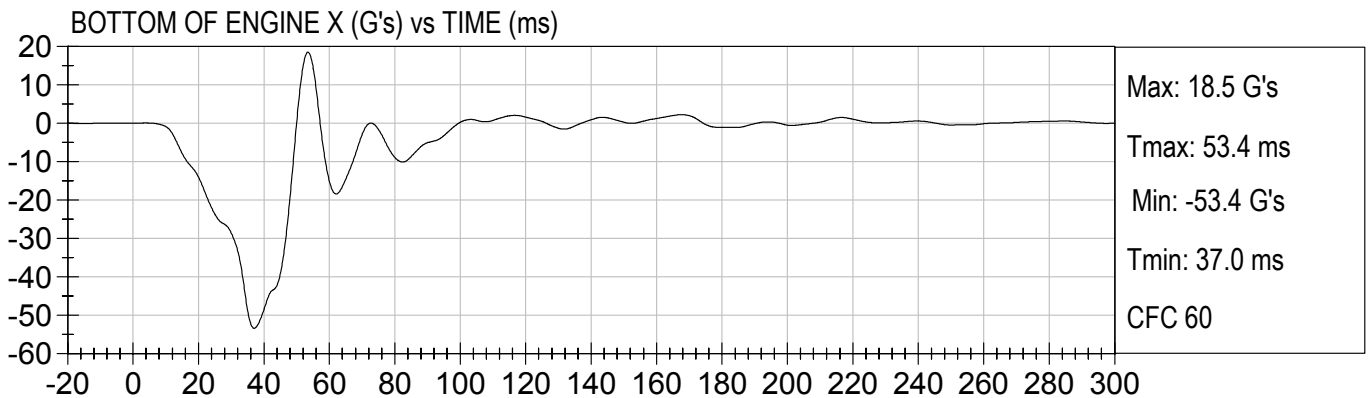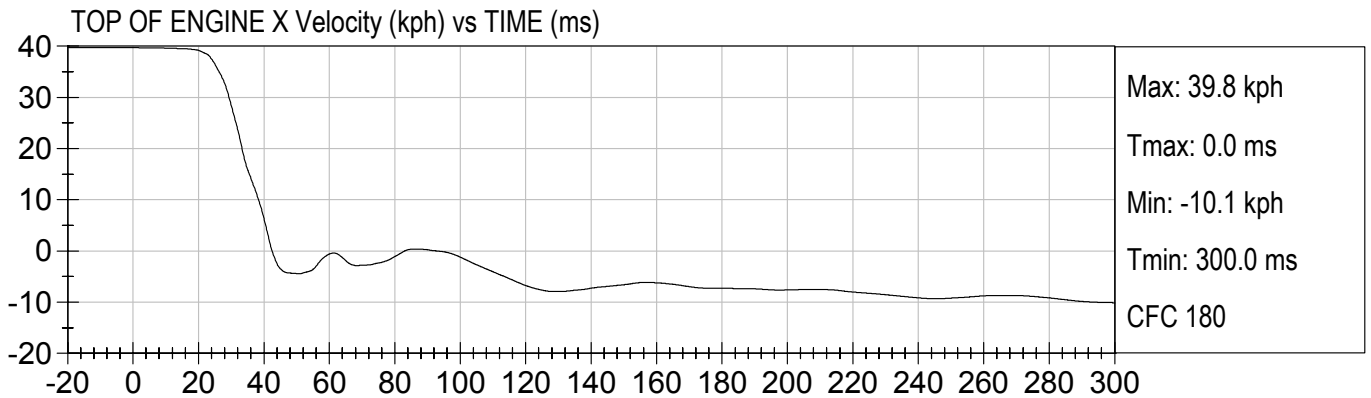
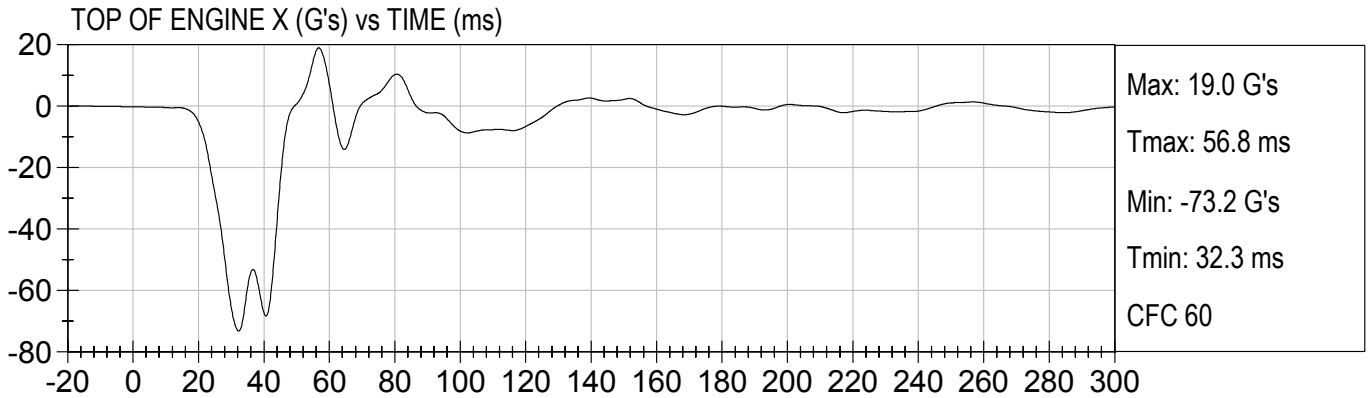


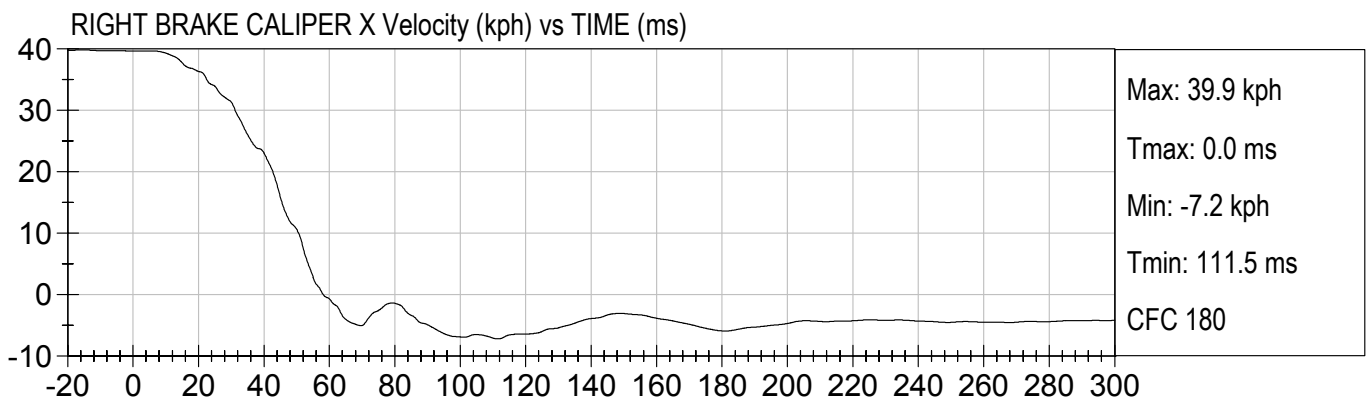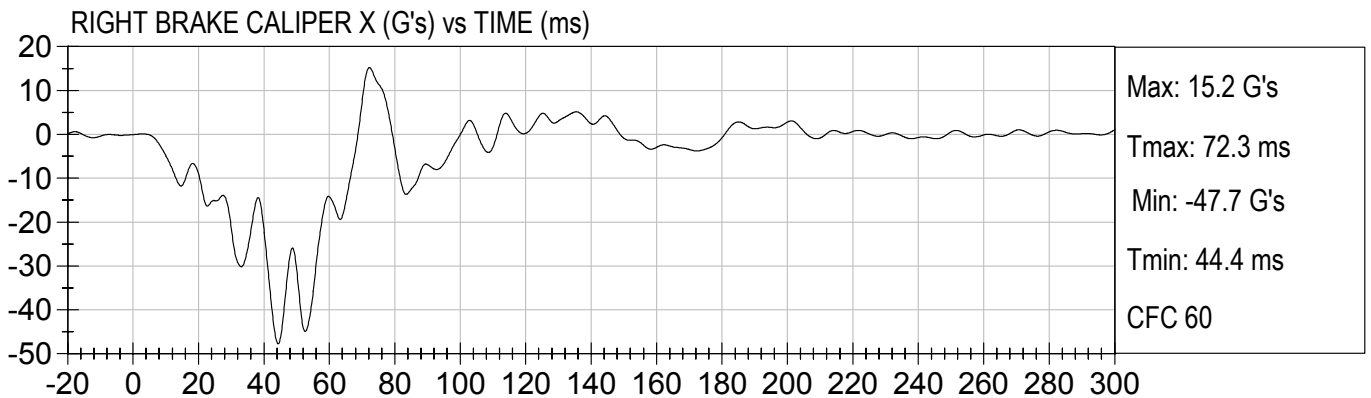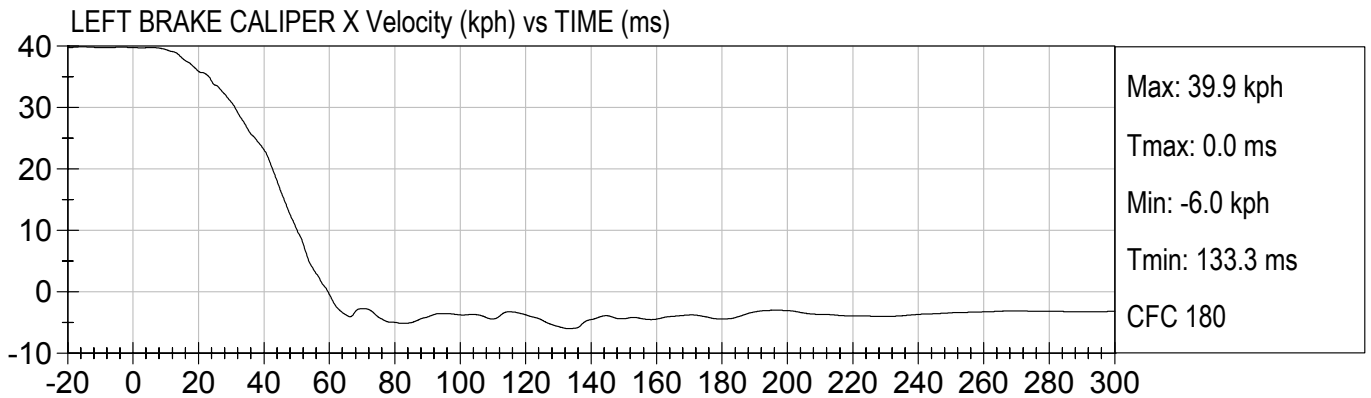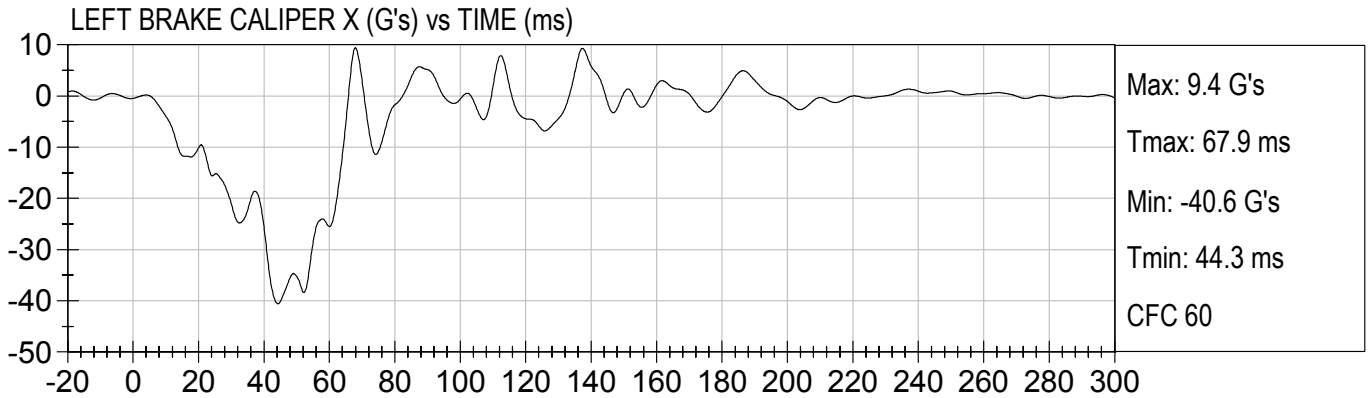

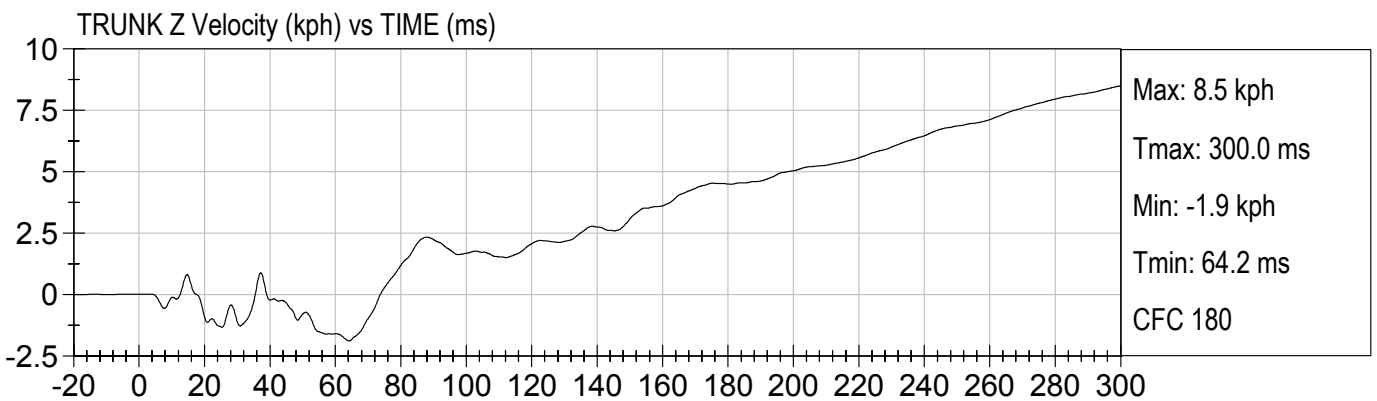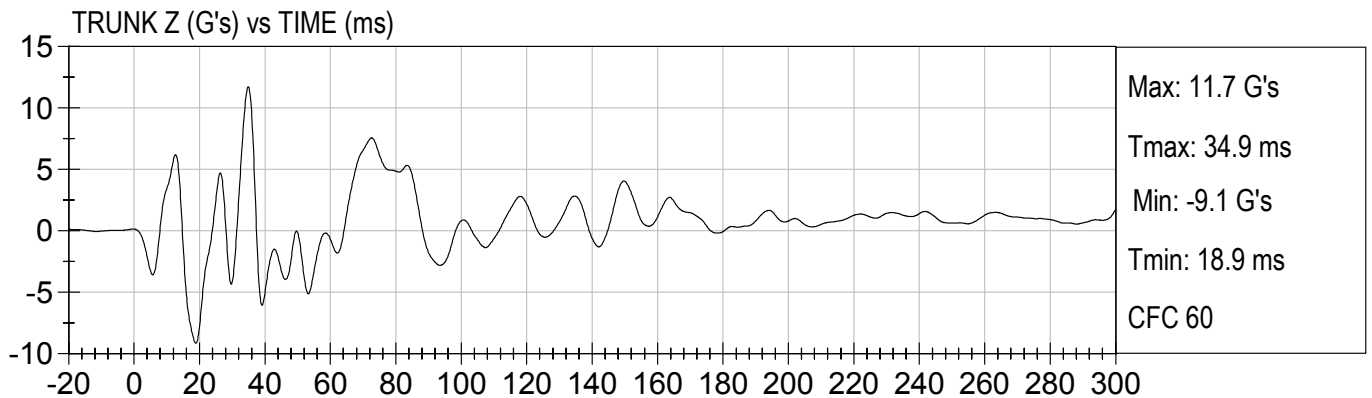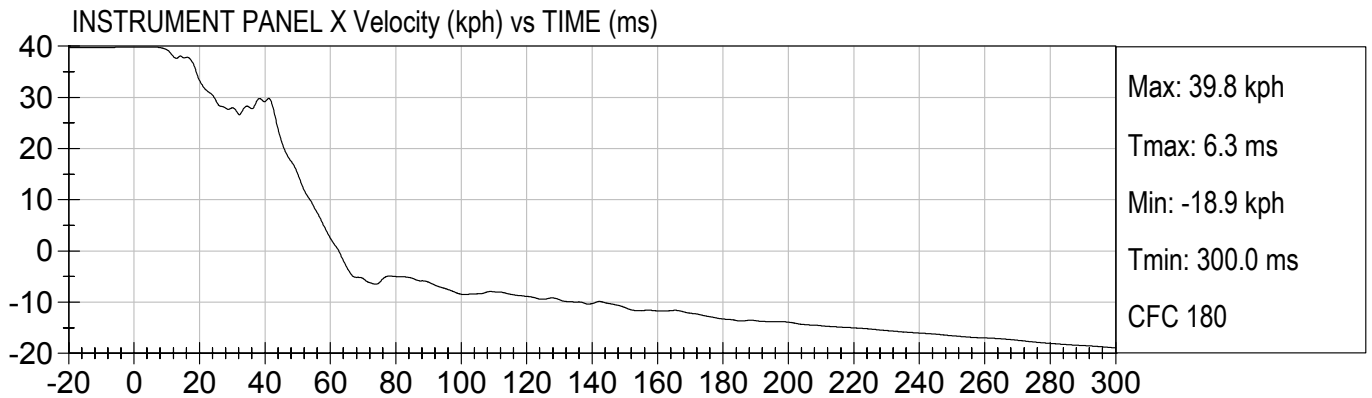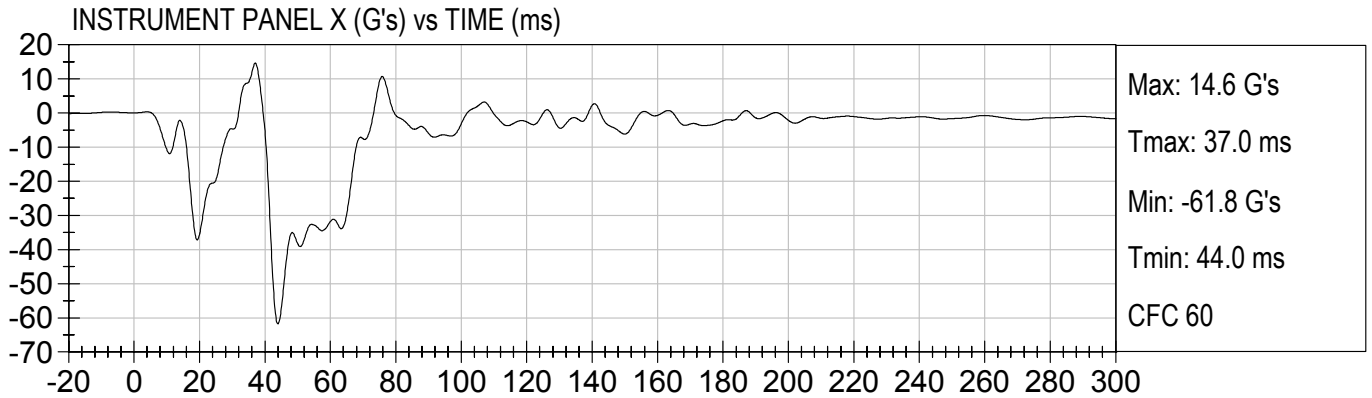

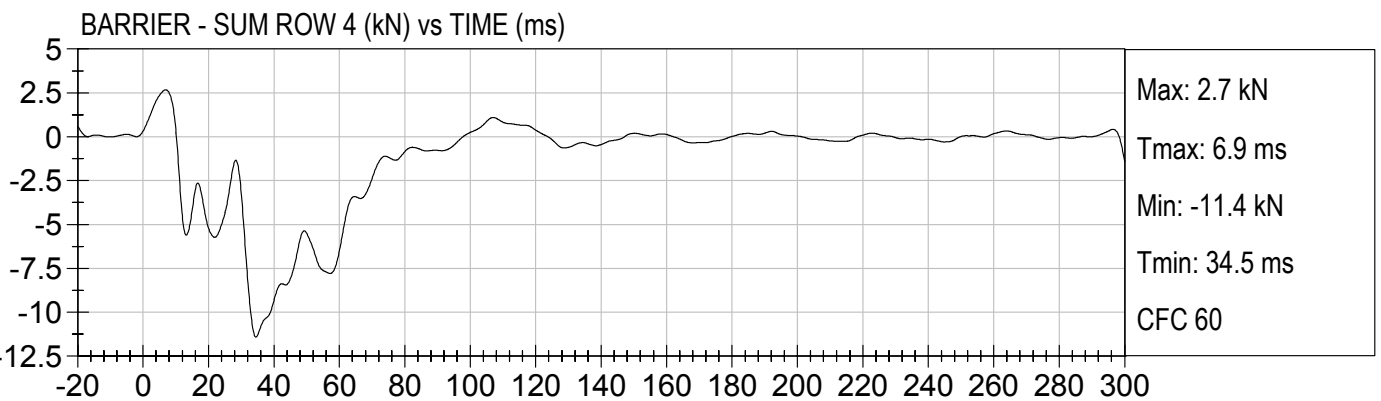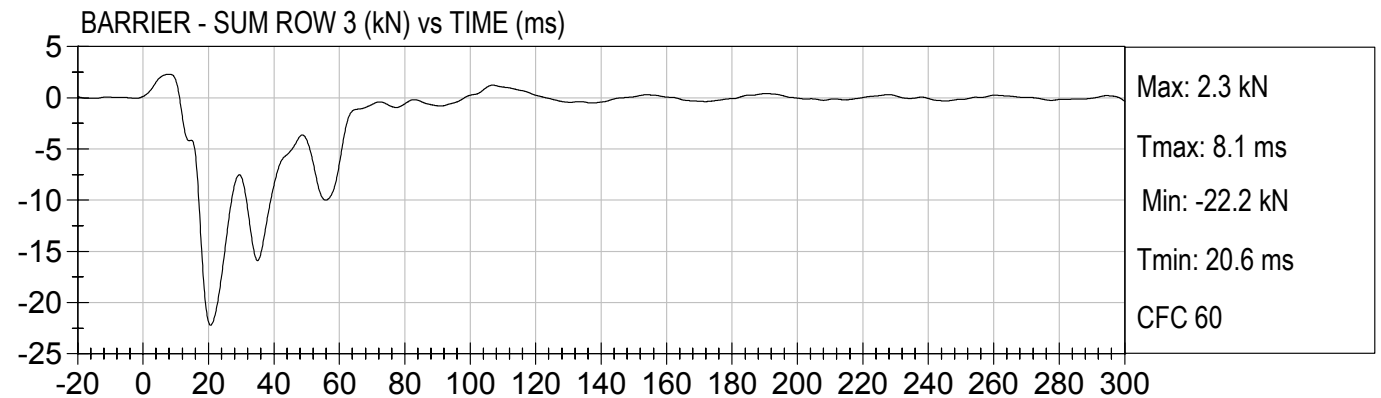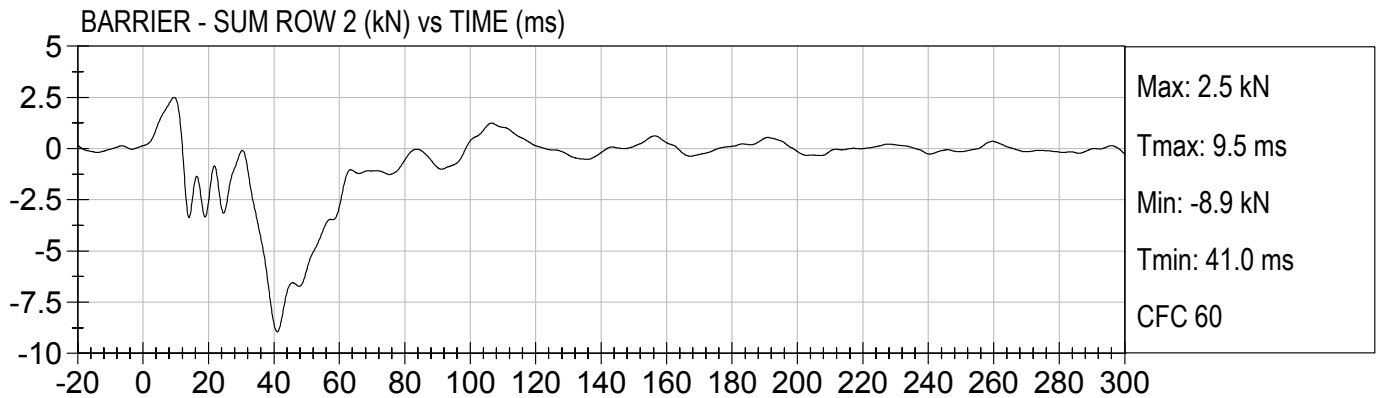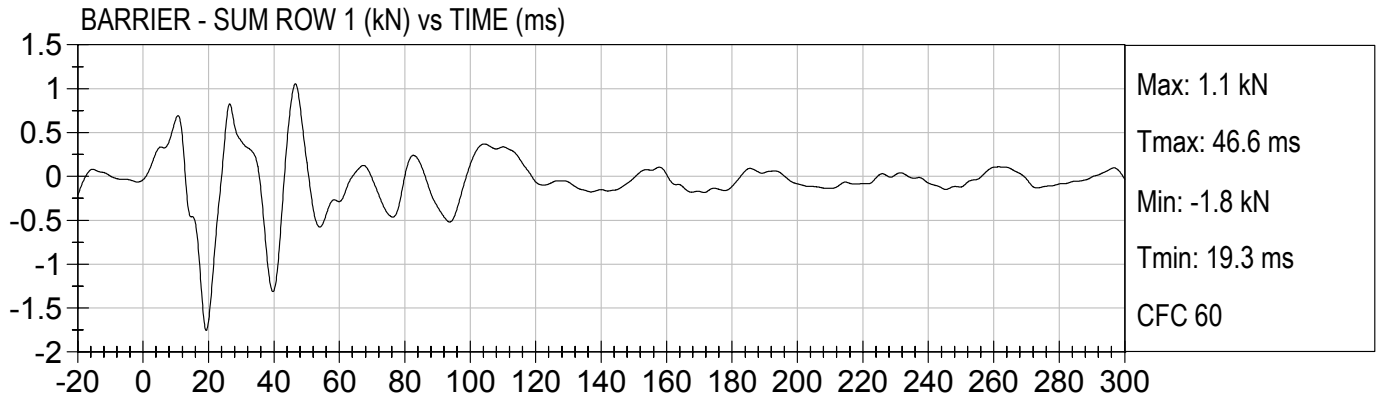

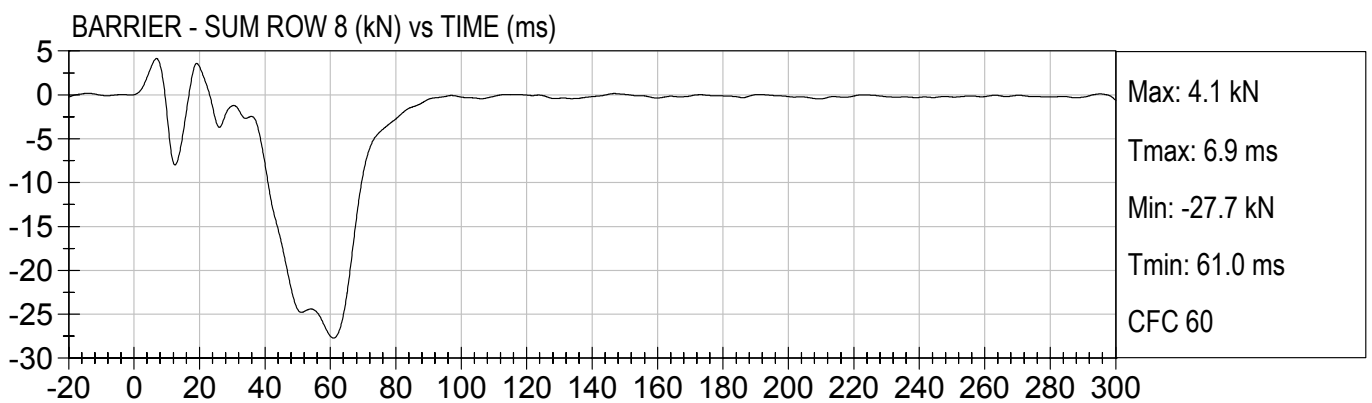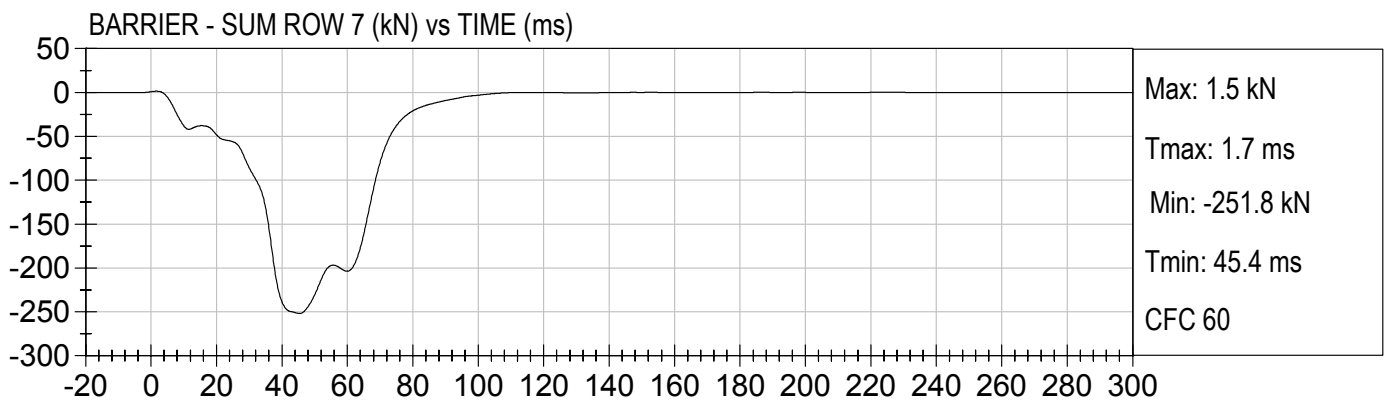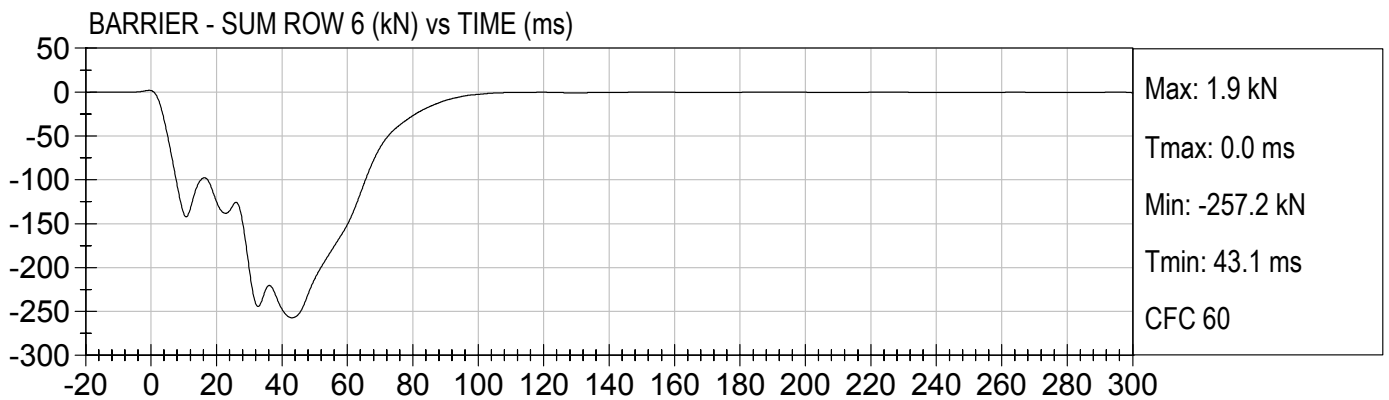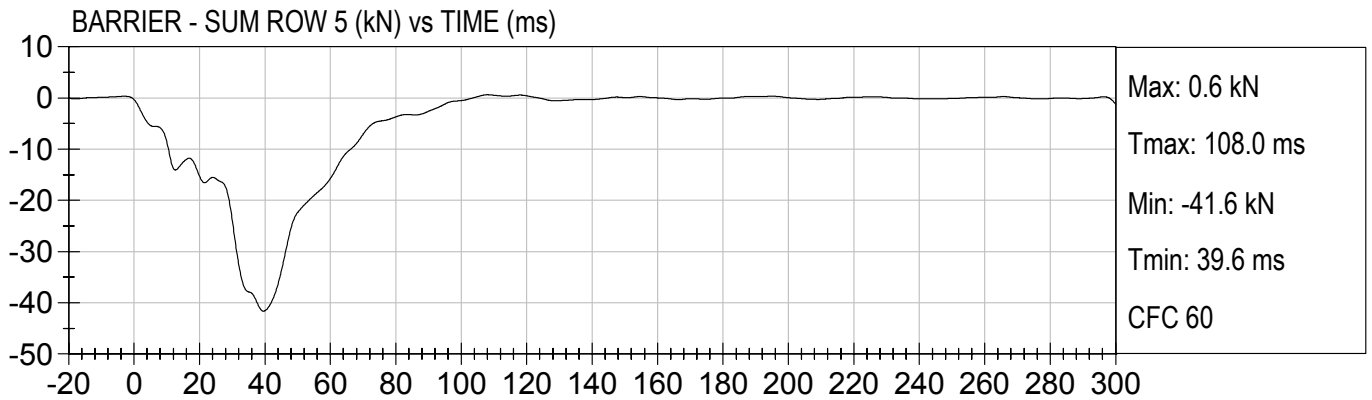

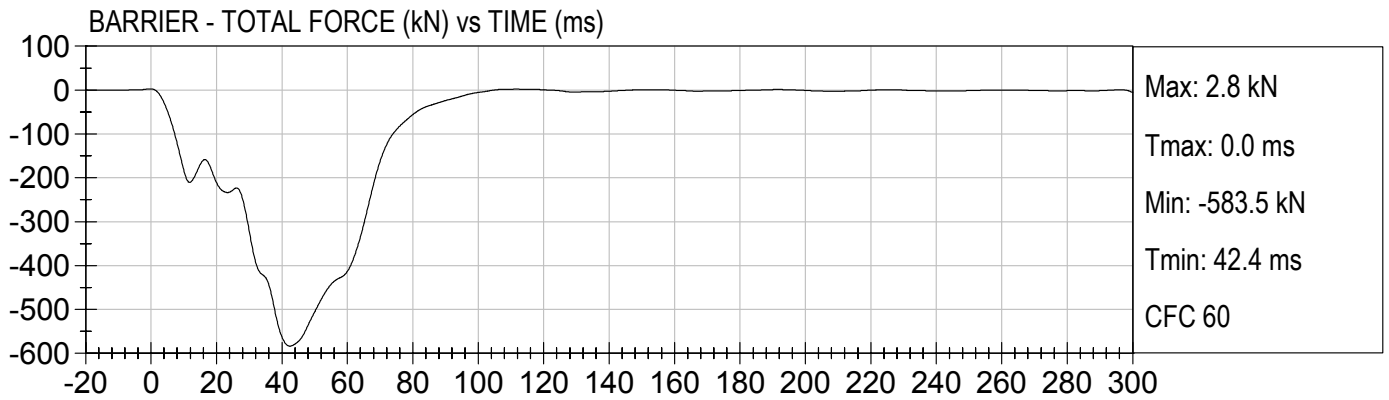
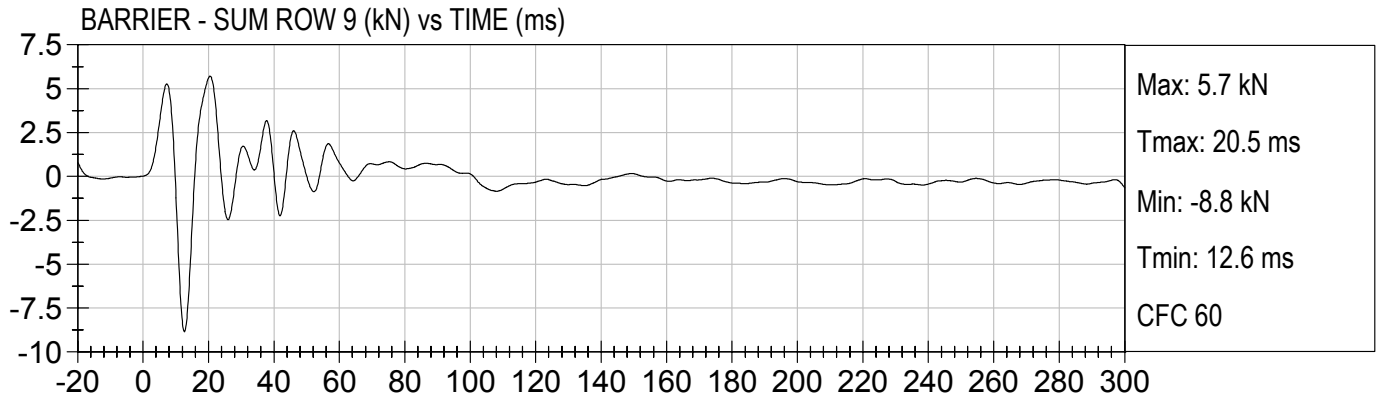




25MPH FRONTAL UNBELTED
2005 TOYOTA HIGHLANDER (C55107)

Test Date: 04/26/05
Speed: 24.7 mph (39.8 km/h)

THE VEHICLE IMPACTED THE BARRIER 4mm HIGHER THAN
THE INITIAL TARGET.

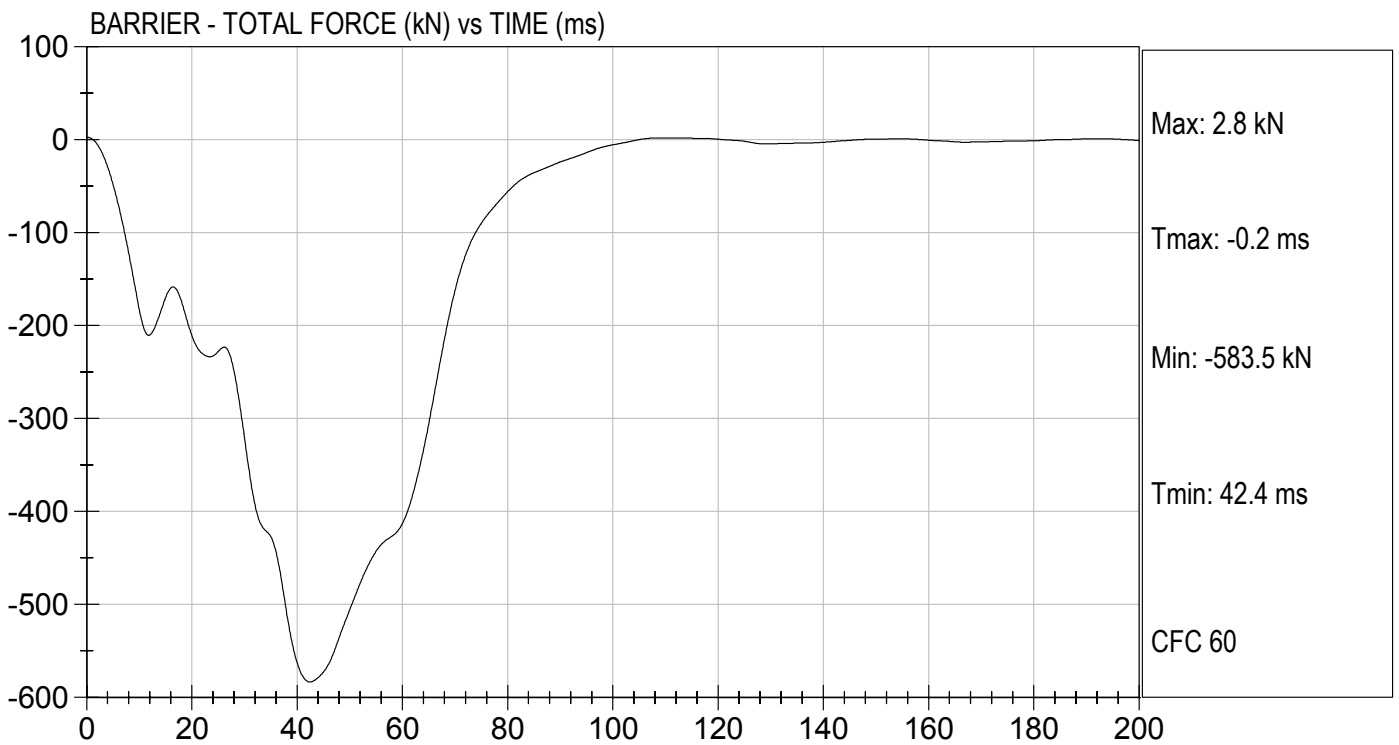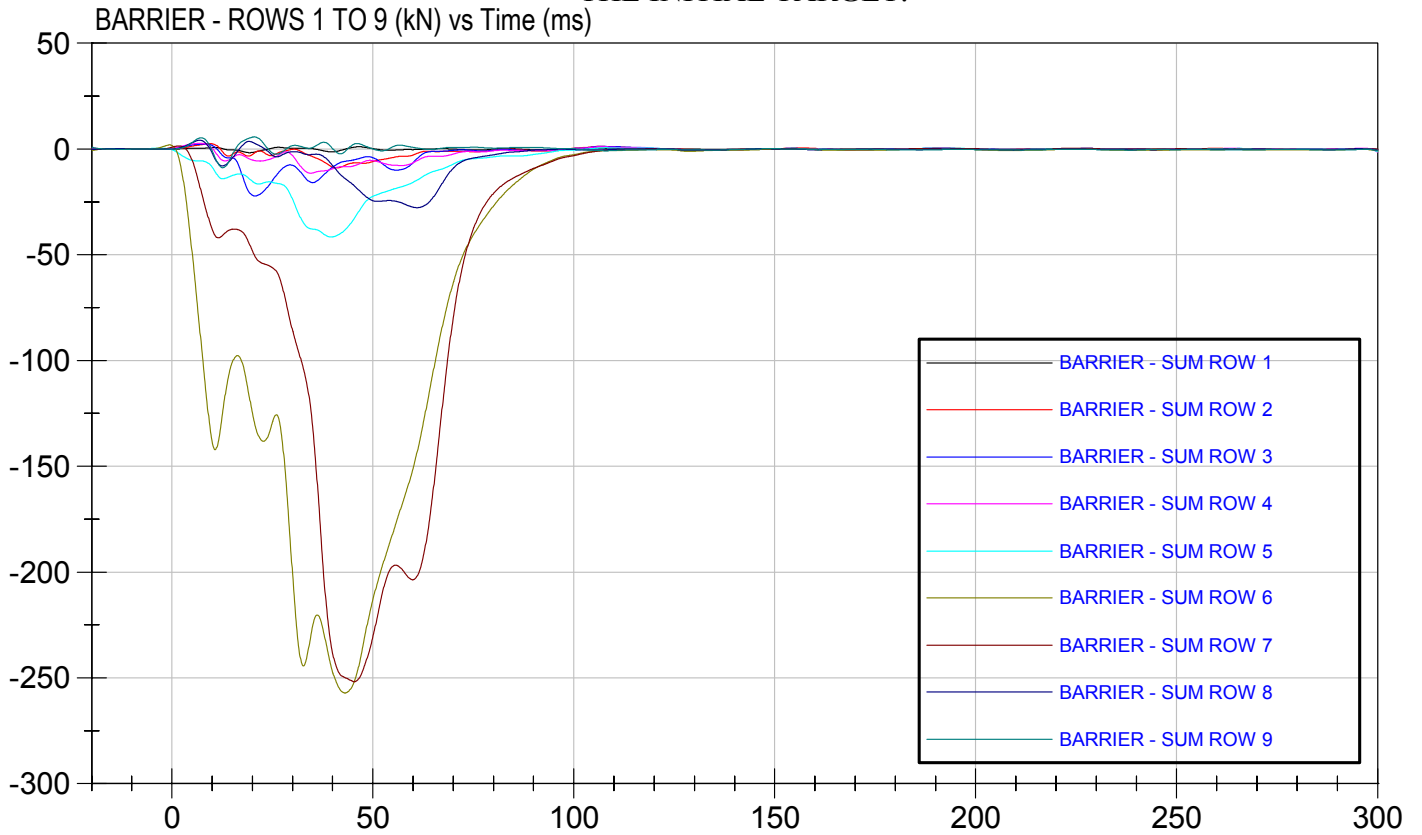

APPENDIX B
CRASH TEST PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

		<u>Page No.</u>
Photo No. 1.	Vehicle Certification Label	B-1
Photo No. 2.	Tire Placard	B-2
Photo No. 3.	Pre-Test Front View of Test Vehicle	B-3
Photo No. 4.	Post-Test Front View of Test Vehicle	B-4
Photo No. 5.	Pre-Test Left Side View of Test Vehicle	B-5
Photo No. 6.	Post-Test Left Side View of Test Vehicle	B-6
Photo No. 7.	Pre-Test Right Side View of Test Vehicle	B-7
Photo No. 8.	Post-Test Right Side View of Test Vehicle	B-8
Photo No. 9.	Pre-Test Right Front Three-Quarter View of Test Vehicle	B-9
Photo No. 10.	Post-Test Right Front Three-Quarter View of Test Vehicle	B-10
Photo No. 11.	Pre-Test Left Front Three-Quarter View of Test Vehicle	B-11
Photo No. 12.	Post-Test Left Front Three-Quarter View of Test Vehicle	B-12
Photo No. 13.	Pre-Test Right Rear Three-Quarter View of Test Vehicle	B-13
Photo No. 14.	Post-Test Right Rear Three-Quarter View of Test Vehicle	B-14
Photo No. 15.	Pre-Test Left Rear Three-Quarter View of Test Vehicle	B-15
Photo No. 16.	Post-Test Left Rear Three-Quarter View of Test Vehicle	B-16
Photo No. 17.	Pre-Test Rear View of Test Vehicle	B-17
Photo No. 18.	Post-Test Rear View of Test Vehicle	B-18
Photo No. 19.	Pre-Test Windshield View	B-19
Photo No. 20.	Post-Test Windshield View	B-20
Photo No. 21.	Pre-Test Engine Compartment View	B-21
Photo No. 22.	Post-Test Engine Compartment View	B-22
Photo No. 23.	Pre-Test Fuel Filler Cap View	B-23
Photo No. 24.	Post-Test Fuel Filler Cap View	B-24
Photo No. 25.	Pre-Test Front Underbody View	B-25
Photo No. 26.	Post-Test Front Underbody View	B-26

Page No.

Photo No. 27.	Pre-Test Mid Underbody View	B-27
Photo No. 28.	Post-Test Mid Underbody View	B-28
Photo No. 29.	Pre-Test Rear Underbody View	B-29
Photo No. 30.	Post-Test Rear Underbody View	B-30
Photo No. 31.	Pre-Test Driver Dummy Front View (head position)	B-31
Photo No. 32.	Post-Test Driver Dummy Front View (head position)	B-32
Photo No. 33.	Pre-Test Driver Dummy Position Left Side View	B-33
Photo No. 34.	Post-Test Driver Dummy Position Left Side View	B-34
Photo No. 35.	Pre-Test Driver Dummy Position Left Side View (Door Open)	B-35
Photo No. 36.	Post-Test Driver Dummy Position Left Side View (Door Open)	B-36
Photo No. 37.	Pre-Test Driver Dummy Seat Position	B-37
Photo No. 38.	Post-Test Driver Dummy Seat Position	B-38
Photo No. 39.	Pre-Test Driver Dummy Feet Position	B-39
Photo No. 40.	Post-Test Driver Dummy Feet Position	B-40
Photo No. 41.	Pre-Test Driver Side Knee Bolster View	B-41
Photo No. 42.	Post-Test Driver Side Knee Bolster View	B-42
Photo No. 43.	Post-Test Driver Dummy Head Contact (headrest)	B-43
Photo No. 44.	Post-Test Driver Knee Contact	B-44
Photo No. 45.	Post-Test Driver Dummy Airbag Contact	B-45
Photo No. 46.	Pre-Test Passenger Dummy Front View (head position)	B-46
Photo No. 47.	Post-Test Passenger Dummy Front View (head position)	B-47
Photo No. 48.	Pre-Test Passenger Dummy Position Right Side View	B-48
Photo No. 49.	Post-Test Passenger Dummy Position Right Side View	B-49
Photo No. 50.	Pre-Test Passenger Dummy Position Right Side View (Door Open)	B-50
Photo No. 51.	Post-Test Passenger Dummy Position Right Side View (Door Open)	B-51
Photo No. 52.	Pre-Test Passenger Dummy Seat Position	B-52
Photo No. 53.	Post-Test Passenger Dummy Seat Position	B-53
Photo No. 54.	Pre-Test Passenger Dummy Feet Position	B-54

Page No.

Photo No. 55.	Post-Test Passenger Dummy Feet Position	B-55
Photo No. 56.	Pre-Test Passenger Side Knee Bolster View	B-56
Photo No. 57.	Post-Test Passenger Side Knee Bolster View	B-57
Photo No. 58.	Post-Test Passenger Dummy Knee Contact	B-58
Photo No. 59.	Post-Test Passenger Dummy Airbag Contact	B-59
Photo No. 60.	Rollover 90 Degrees	B-60
Photo No. 61.	Rollover 180 Degrees	B-61
Photo No. 62.	Rollover 270 Degrees	B-62
Photo No. 63.	Rollover 360 Degrees	B-63
Photo No. 64.	Vehicle Impact	B-64
Photo No. 65.	Temperature Plot	B-65
Photo No. 66.	Vehicle in Relation to The Load Cell Grid	B-66

12/04

MFD. BY: TOYOTA MOTOR CORPORATION

GVWR: 2430KG (5360LB)

GAWR: FRT. 1300KG (2865LB) WITH P225/70R16 TIRES.

16X6 1/2JJ RIMS, AT 210KPA (30PSI) COLD.

RR. 1340KG (2950LB) WITH P225/70R16 TIRES.

16X6 1/2JJ RIMS, AT 210KPA (30PSI) COLD.

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR
VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON
THE DATE OF MANUFACTURE SHOWN ABOVE.

JTEGP21A650062275 MPV



C/TR: 040/FA03

MCU23L-BWANKA

067

A/TM: -04A/U151E

MADE IN JAPAN

J

EMENT

ERE 3
ent ne
b.

ROID
PSI
PSI

E

B-1

Vehicle Certification Label



TIRE AND LOADING INFORMATION

SEATING CAPACITY: TOTAL 5
FRONT 2: REAR 3

The combined weight of occupants and cargo should never exceed 390 kg or 860 lbs.

ORIGINAL TIRE SIZE	COLD TIRE INFLATION PRESSURE	
P225/70R16	FRONT	210kPa, 30PSI
	REAR	210kPa, 30PSI

SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION

48200

INFORMATION SUR LES PNEUS ET LE CHARGEMENT

NOMBRE DE PLACES ASSISES : TOTAL 5
AVANT 2 : ARRIERE 3

Le poids total des occupants et du chargement ne doit jamais être supérieur à 390 kg ou 860 lb.

DIMENSION DES PNEUS D'ORIGINE	PRESSION DE GONFLAGE À FROID	
P225/70R16	AVANT	210kPa, 30PSI
	ARRIERE	210kPa, 30PSI

POUR DE PLUS AMPLES INFORMATIONS, VOIR LE MANUEL DU PROPRIÉTAIRE

4 E


B-2

MFD
GVW
GAW

TH
VF
T



Pre-Test Front View of Test Vehicle

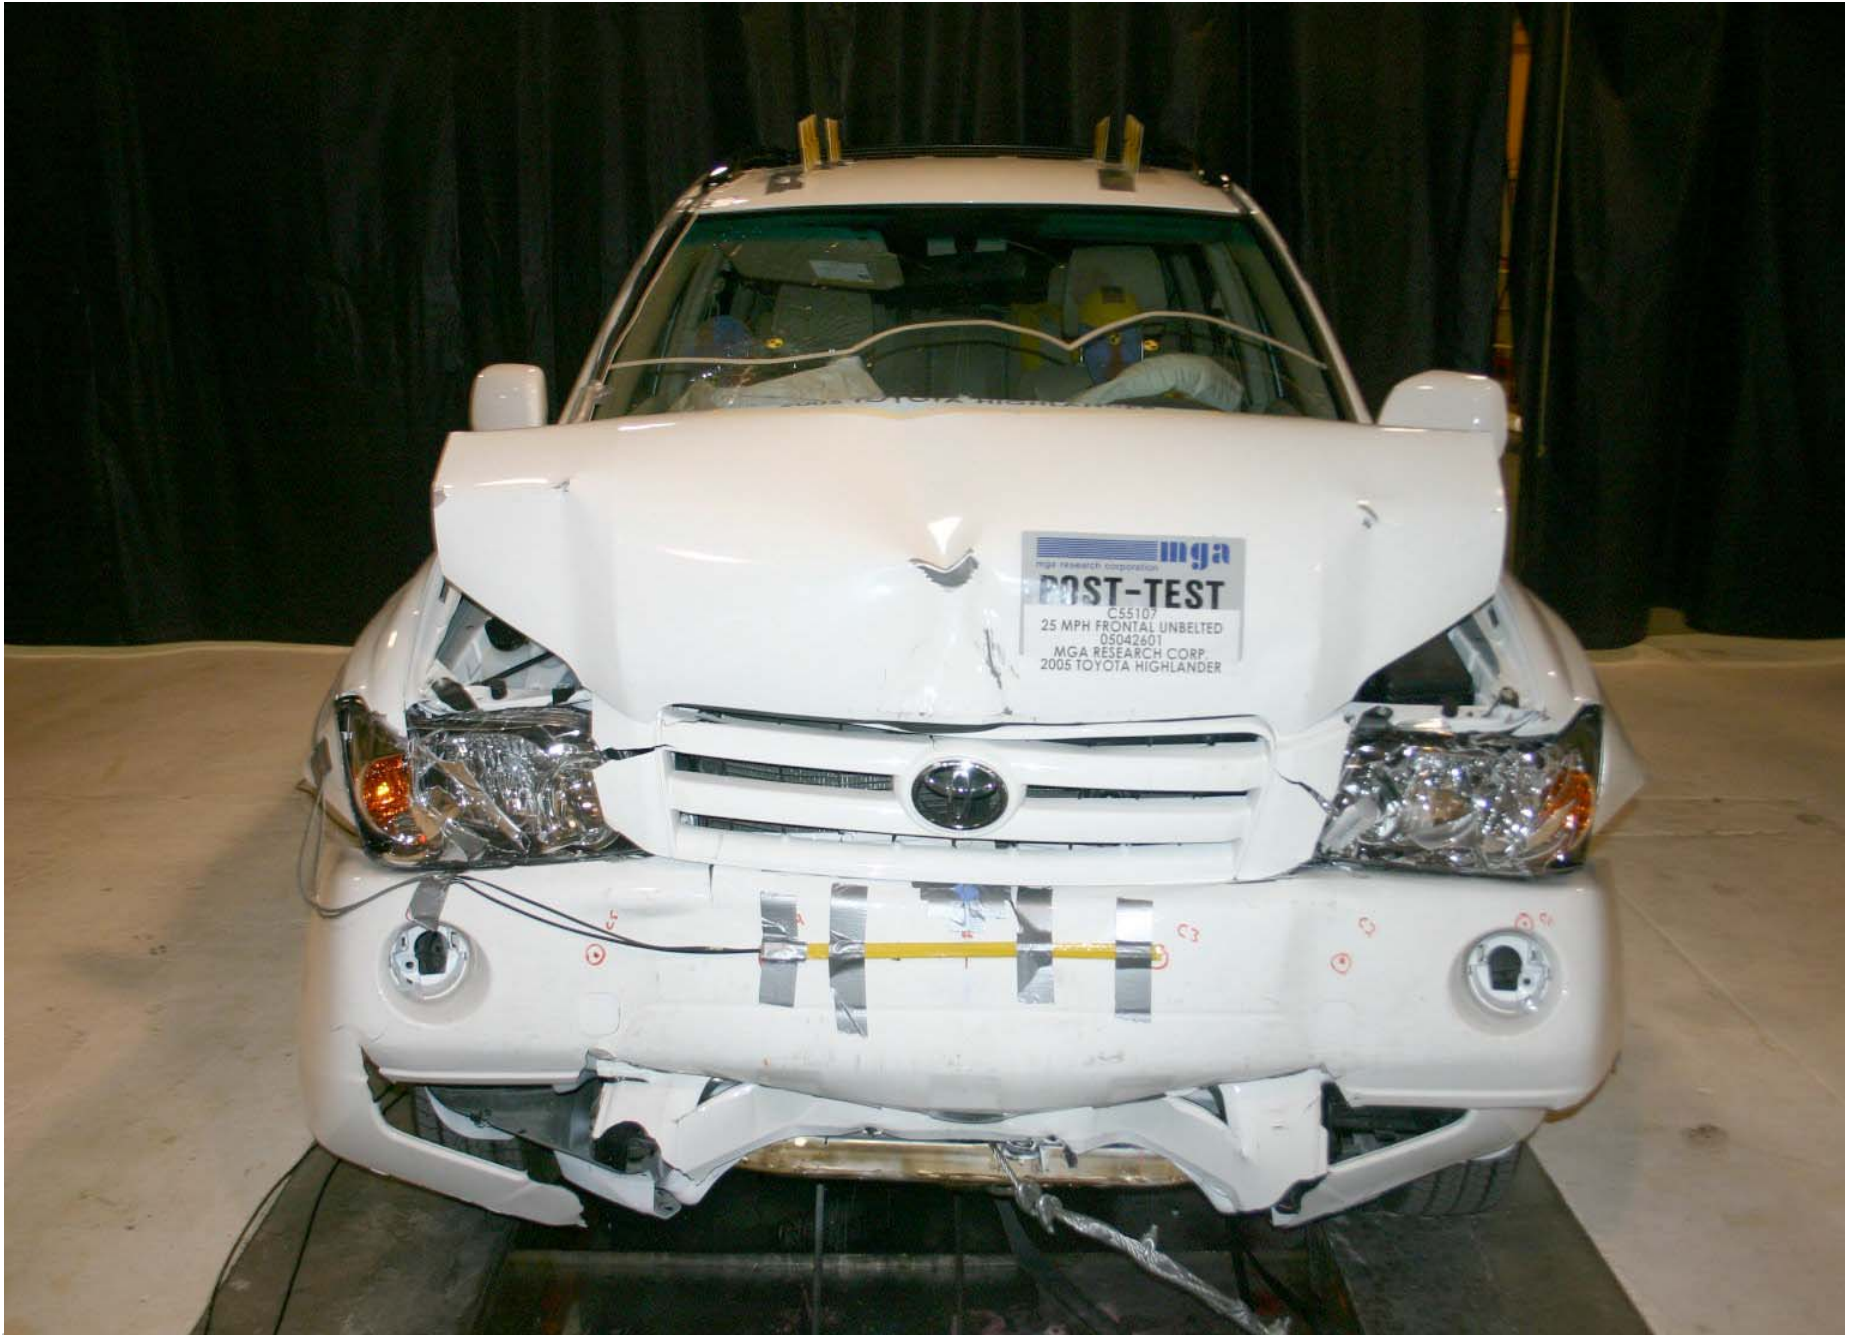

Post-Test Front View of Test Vehicle



Pre-Test Left Side View of Test Vehicle



Post-Test Left Side View of Test Vehicle



Pre-Test Right Side View of Test Vehicle



Post-Test Right Side View of Test Vehicle



Pre-Test Right Front Three-Quarter View of Test Vehicle



Post-Test Right Front Three-Quarter View of Test Vehicle



Pre-Test Left Front Three-Quarter View of Test Vehicle



Post-Test Left Front Three-Quarter View of Test Vehicle



Pre-Test Right Rear Three-Quarter View of Test Vehicle



Post-Test Right Rear Three-Quarter View of Test Vehicle



Pre-Test Left Rear Three-Quarter View of Test Vehicle



Post-Test Left Rear Three-Quarter View of Test Vehicle



Pre-Test Rear View of Test Vehicle



Post-Test Rear View of Test Vehicle




Pre-Test Windshield View



Post-Test Windshield View



Pre-Test Engine Compartment View

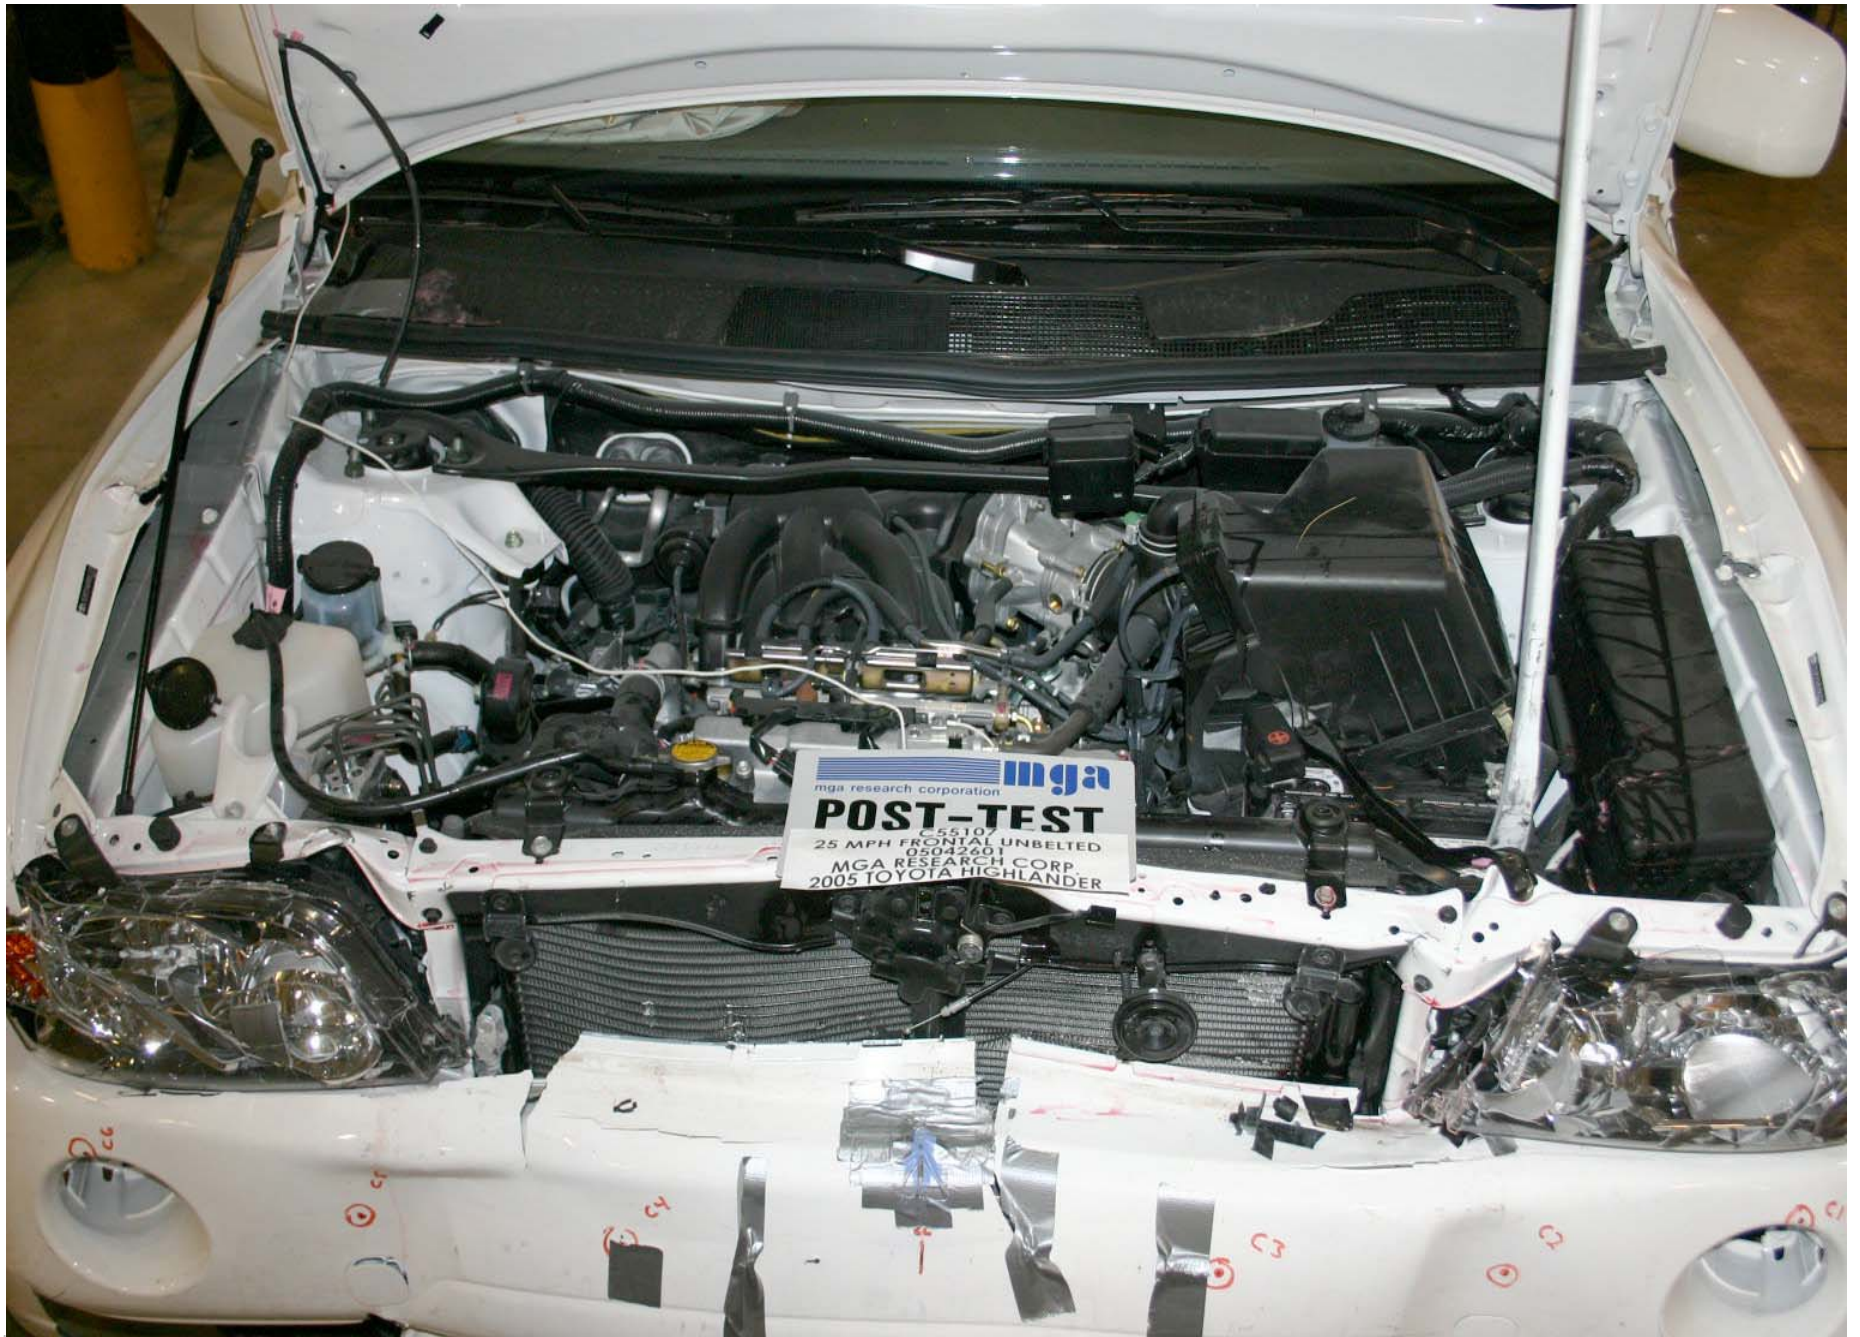


Post-Test Engine Compartment View




Pre-Test Fuel Filler Cap View




Post-Test Fuel Filler Cap View

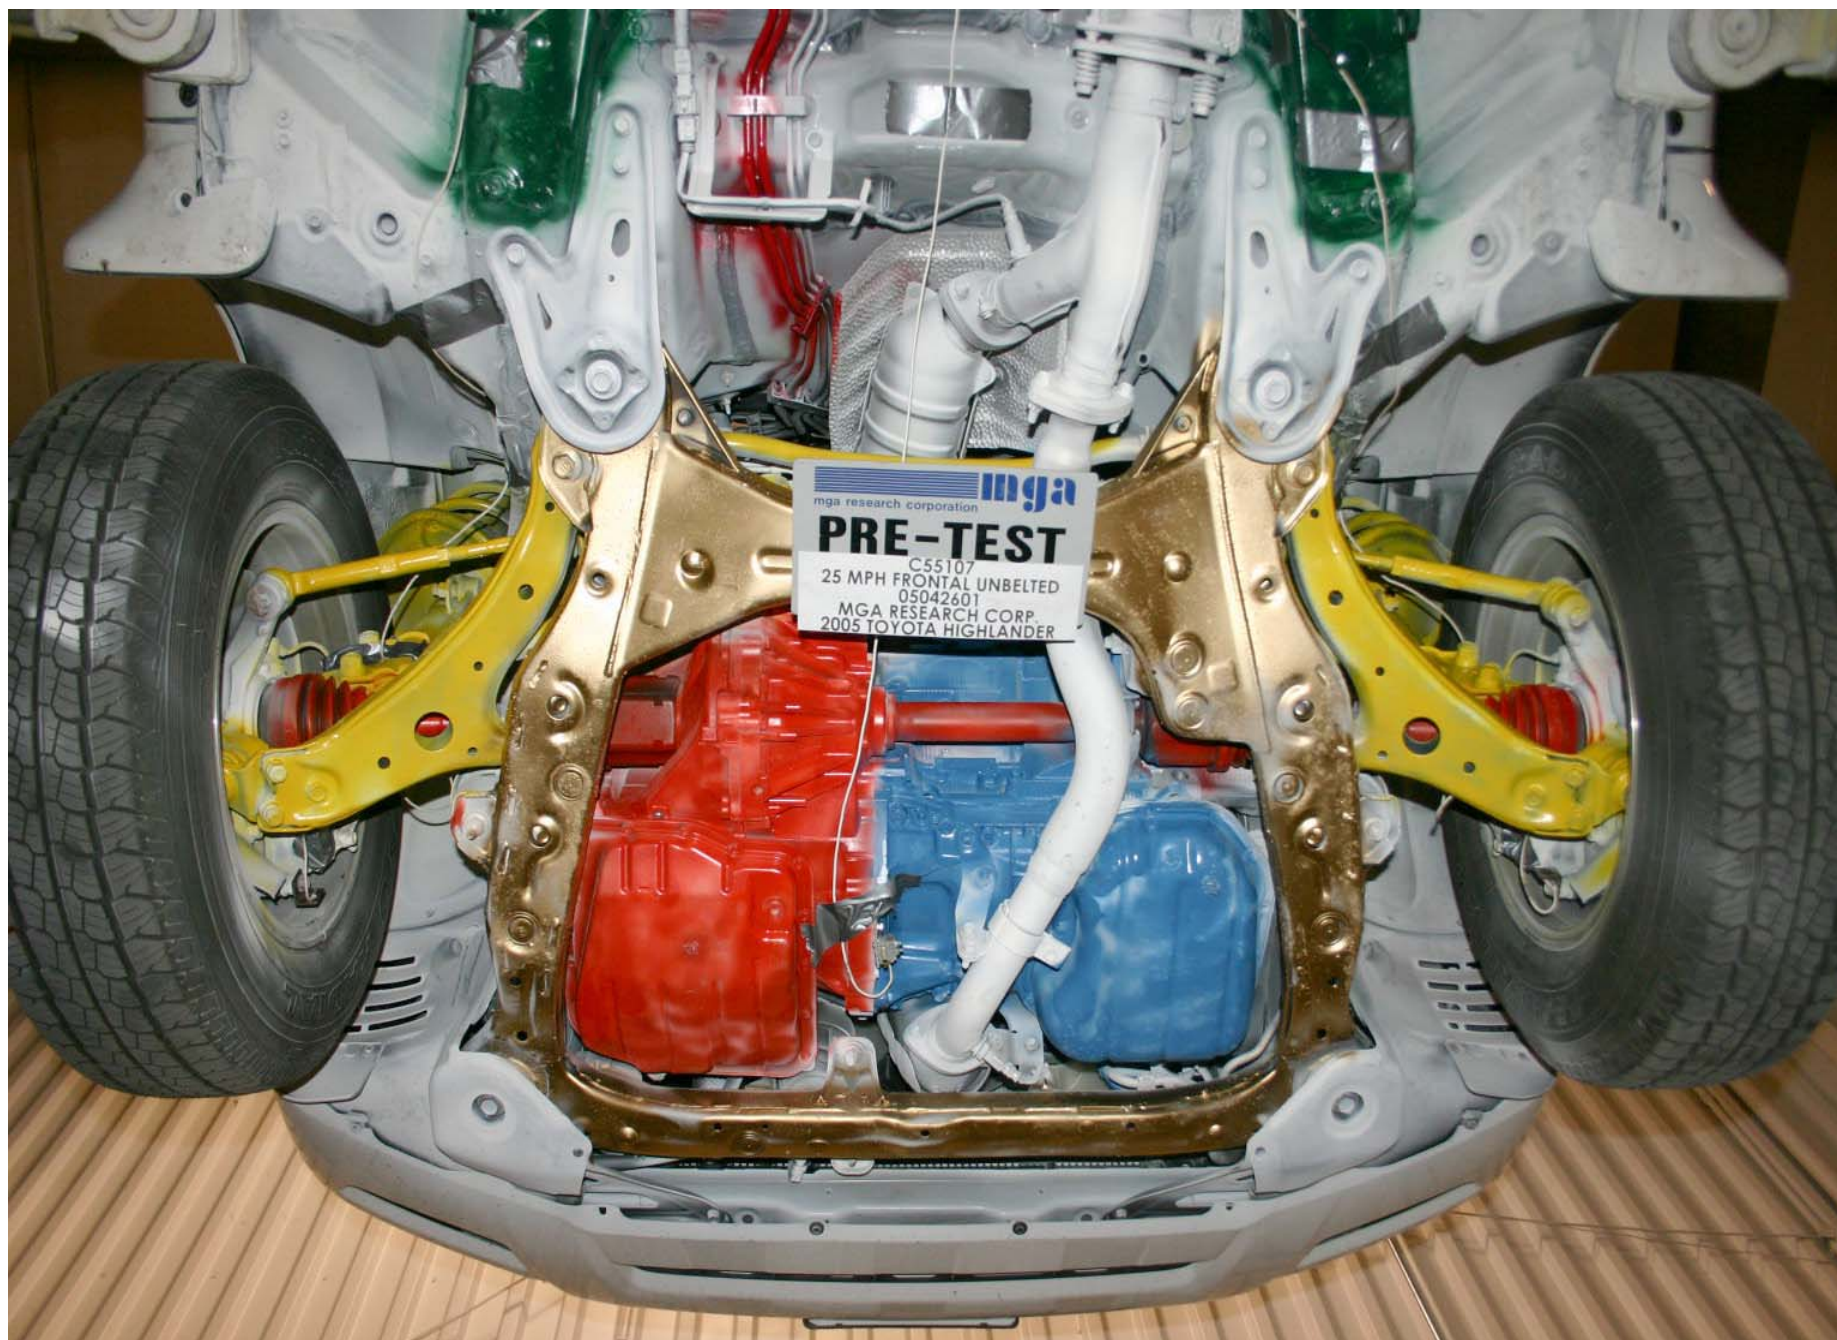

Pre-Test Front Underbody View

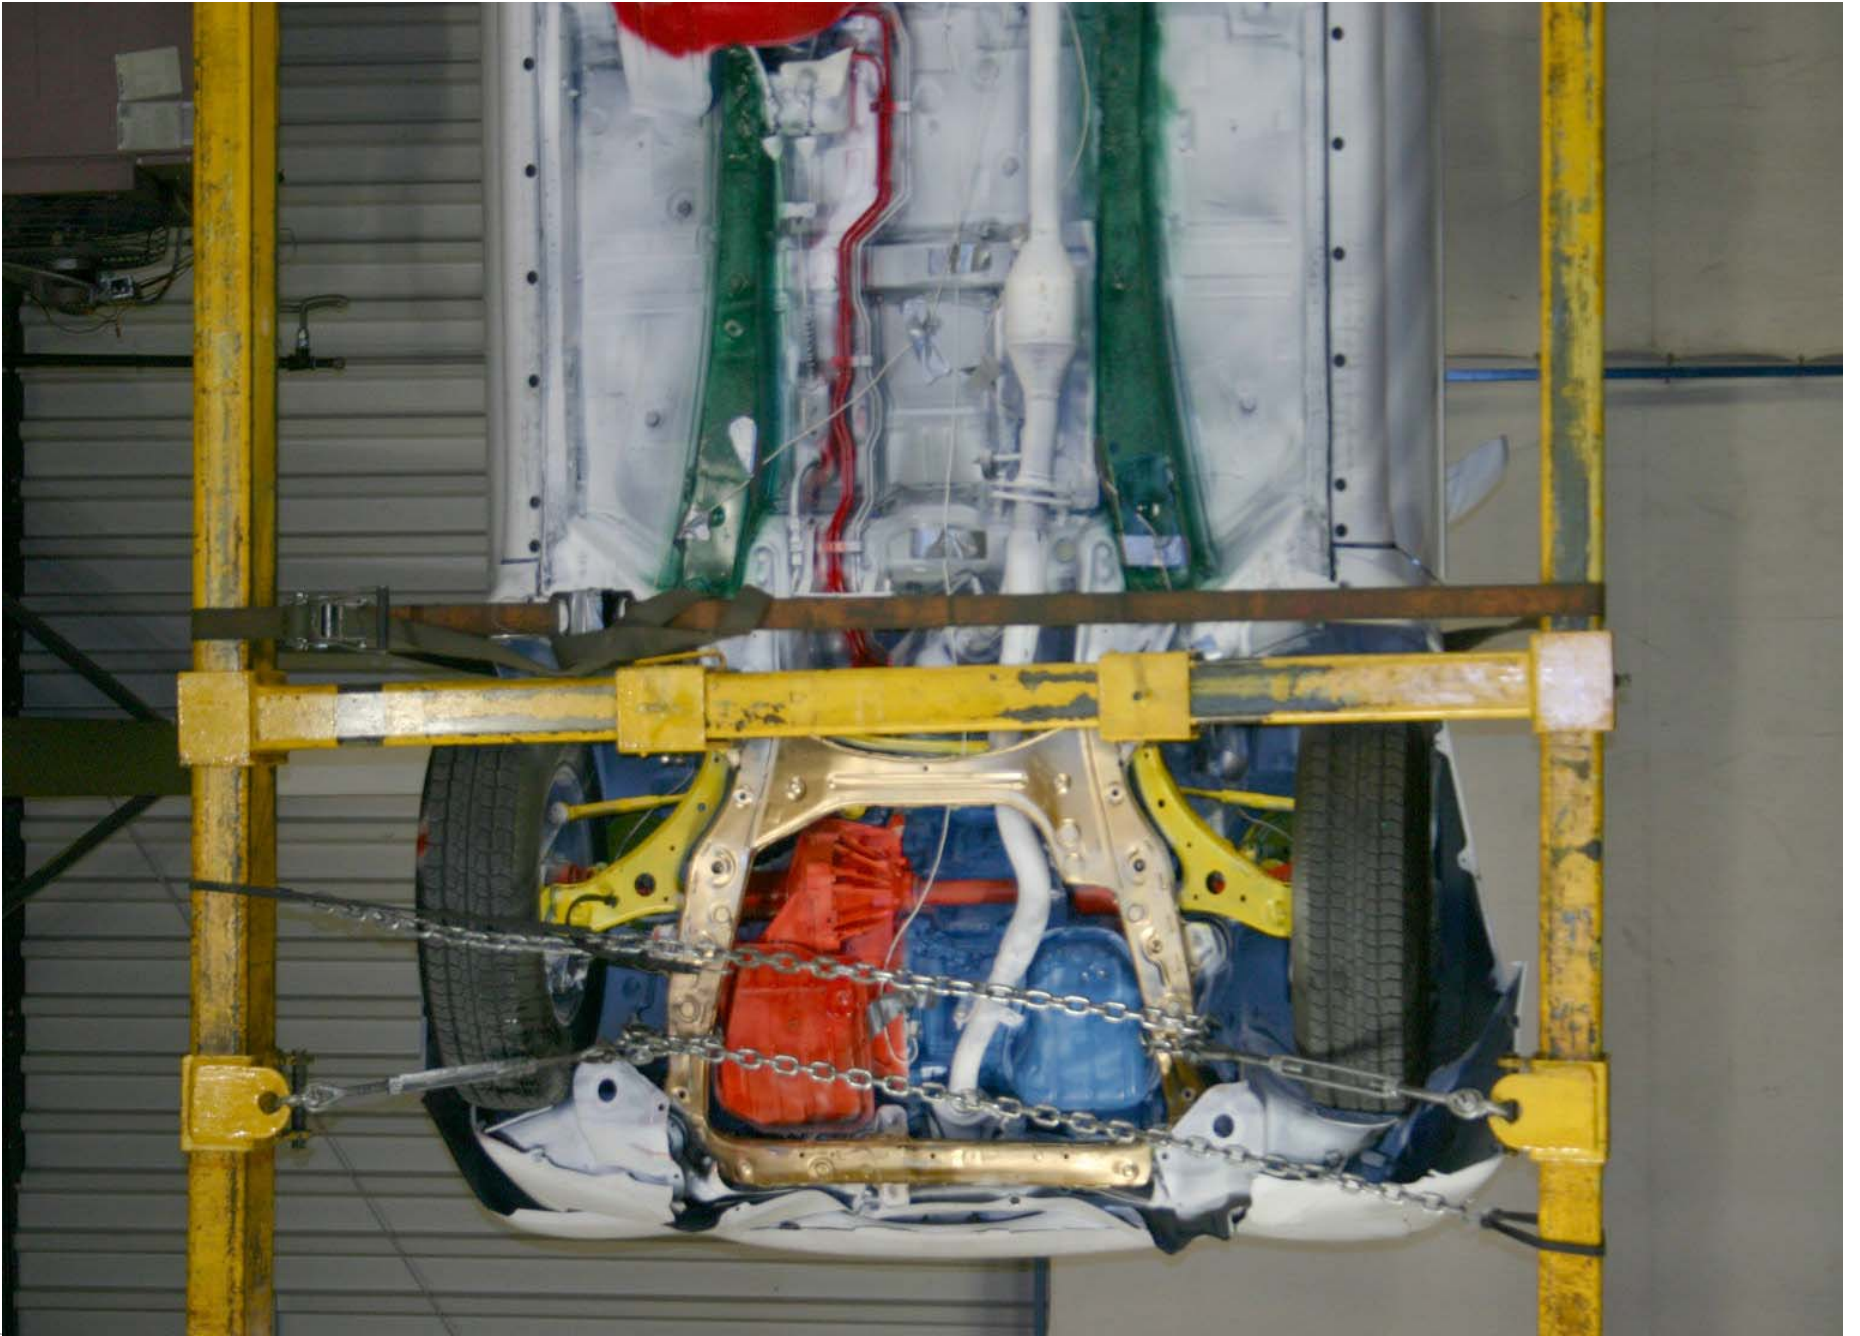


Post-Test Front Underbody View

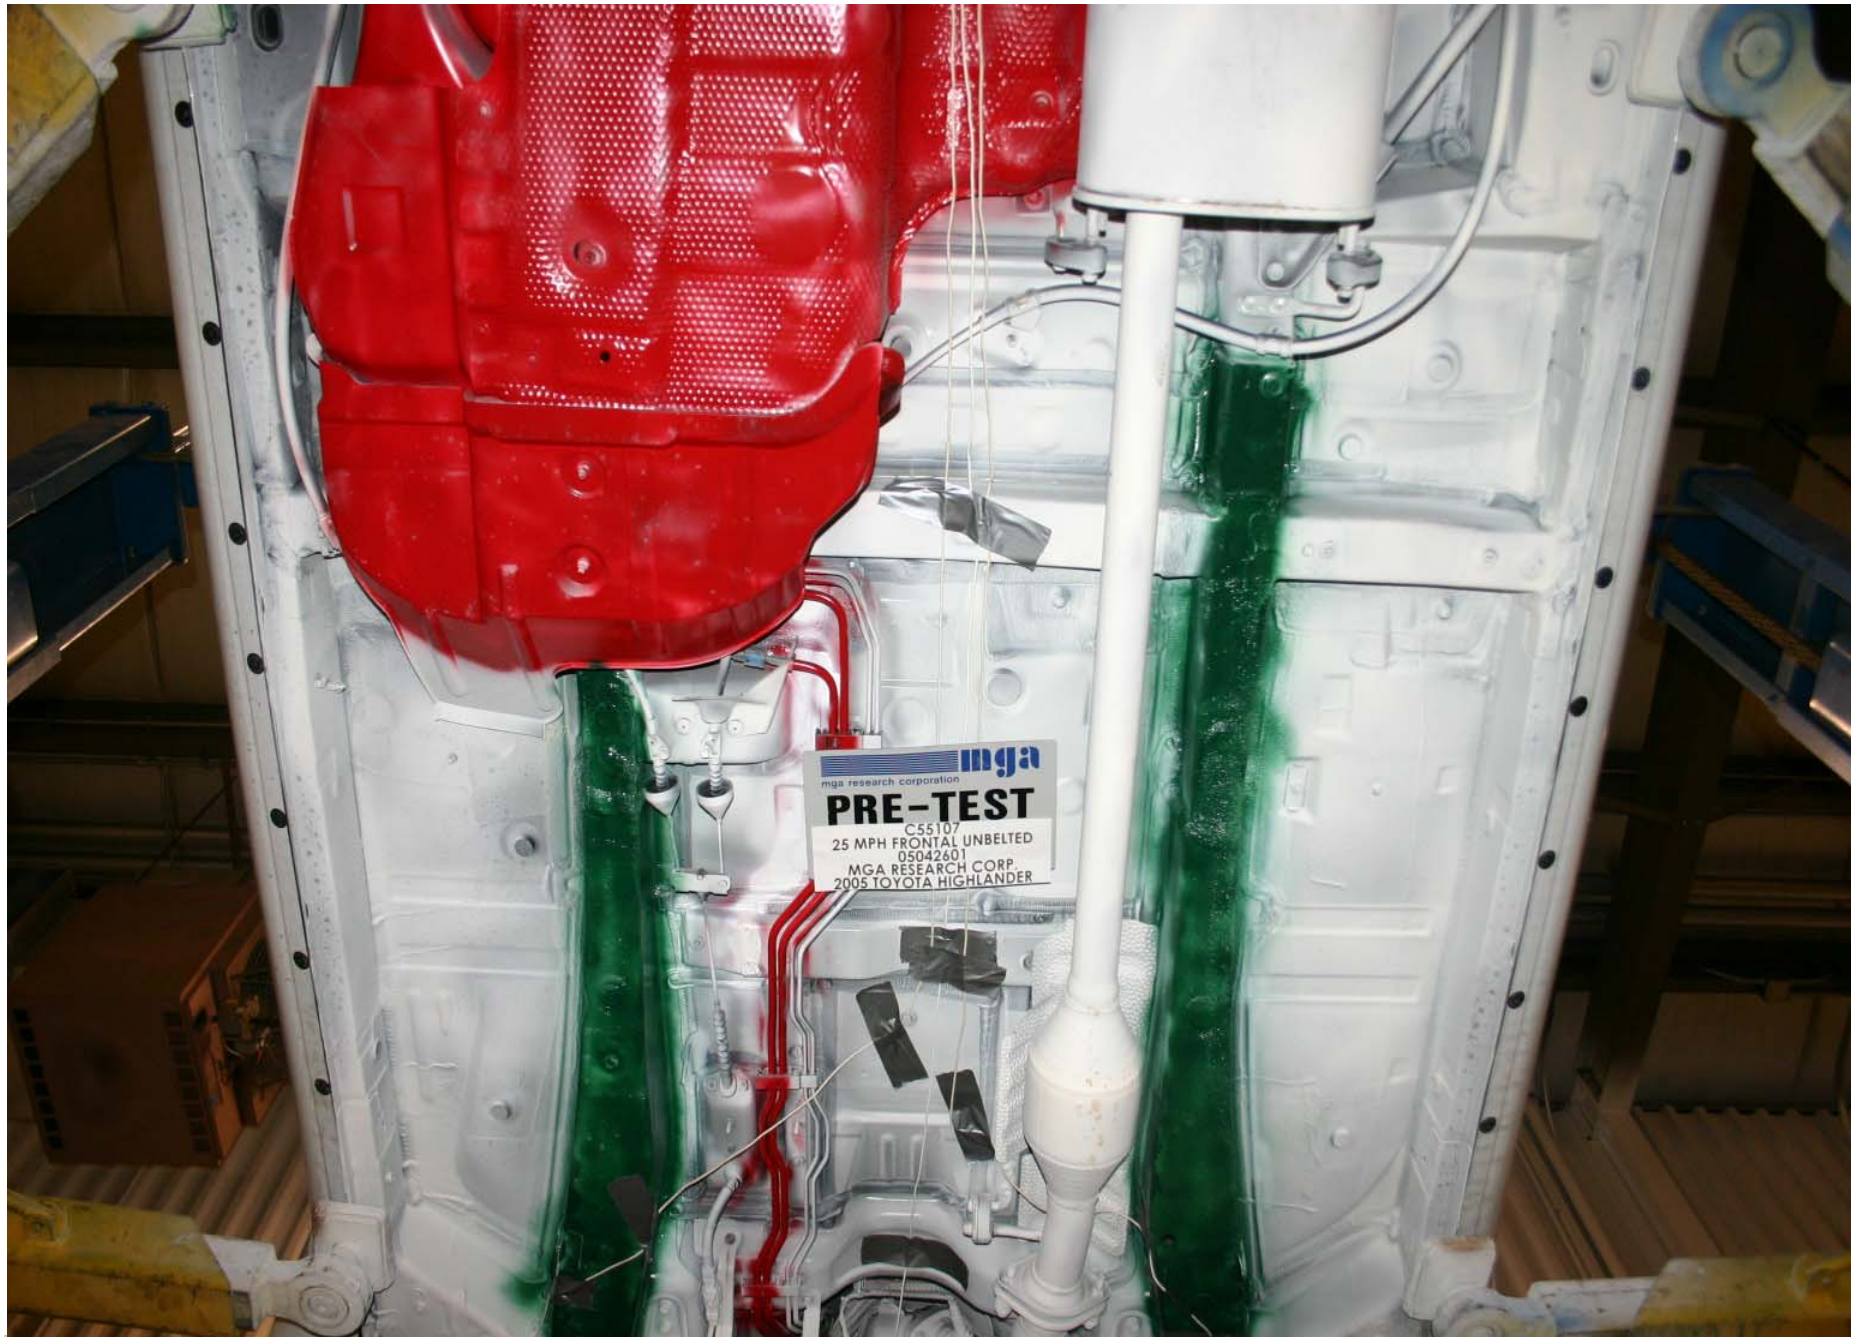


Pre-Test Mid Underbody View



Post-Test Mid Underbody View

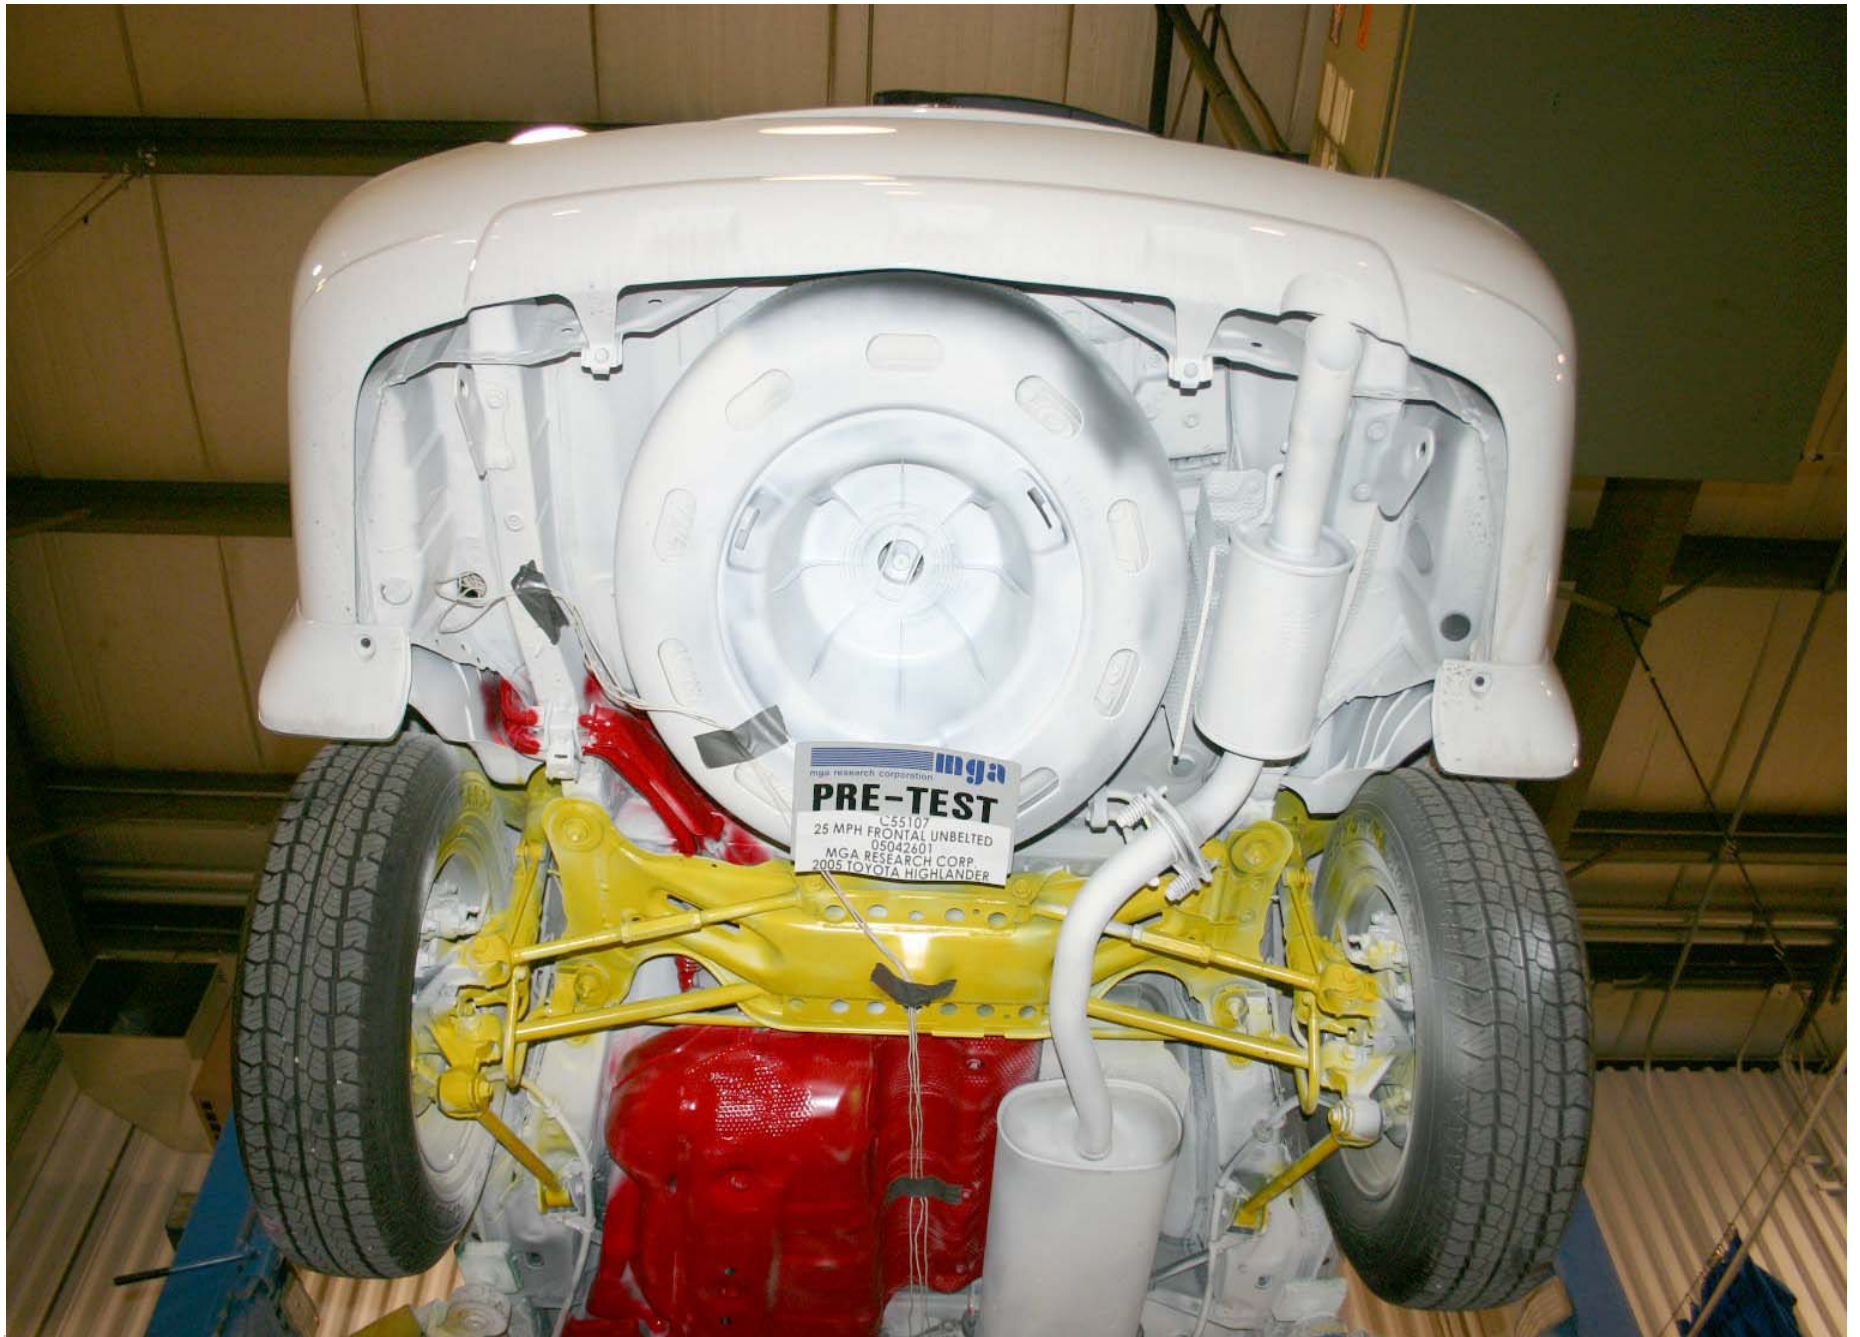

Pre-Test Rear Underbody View

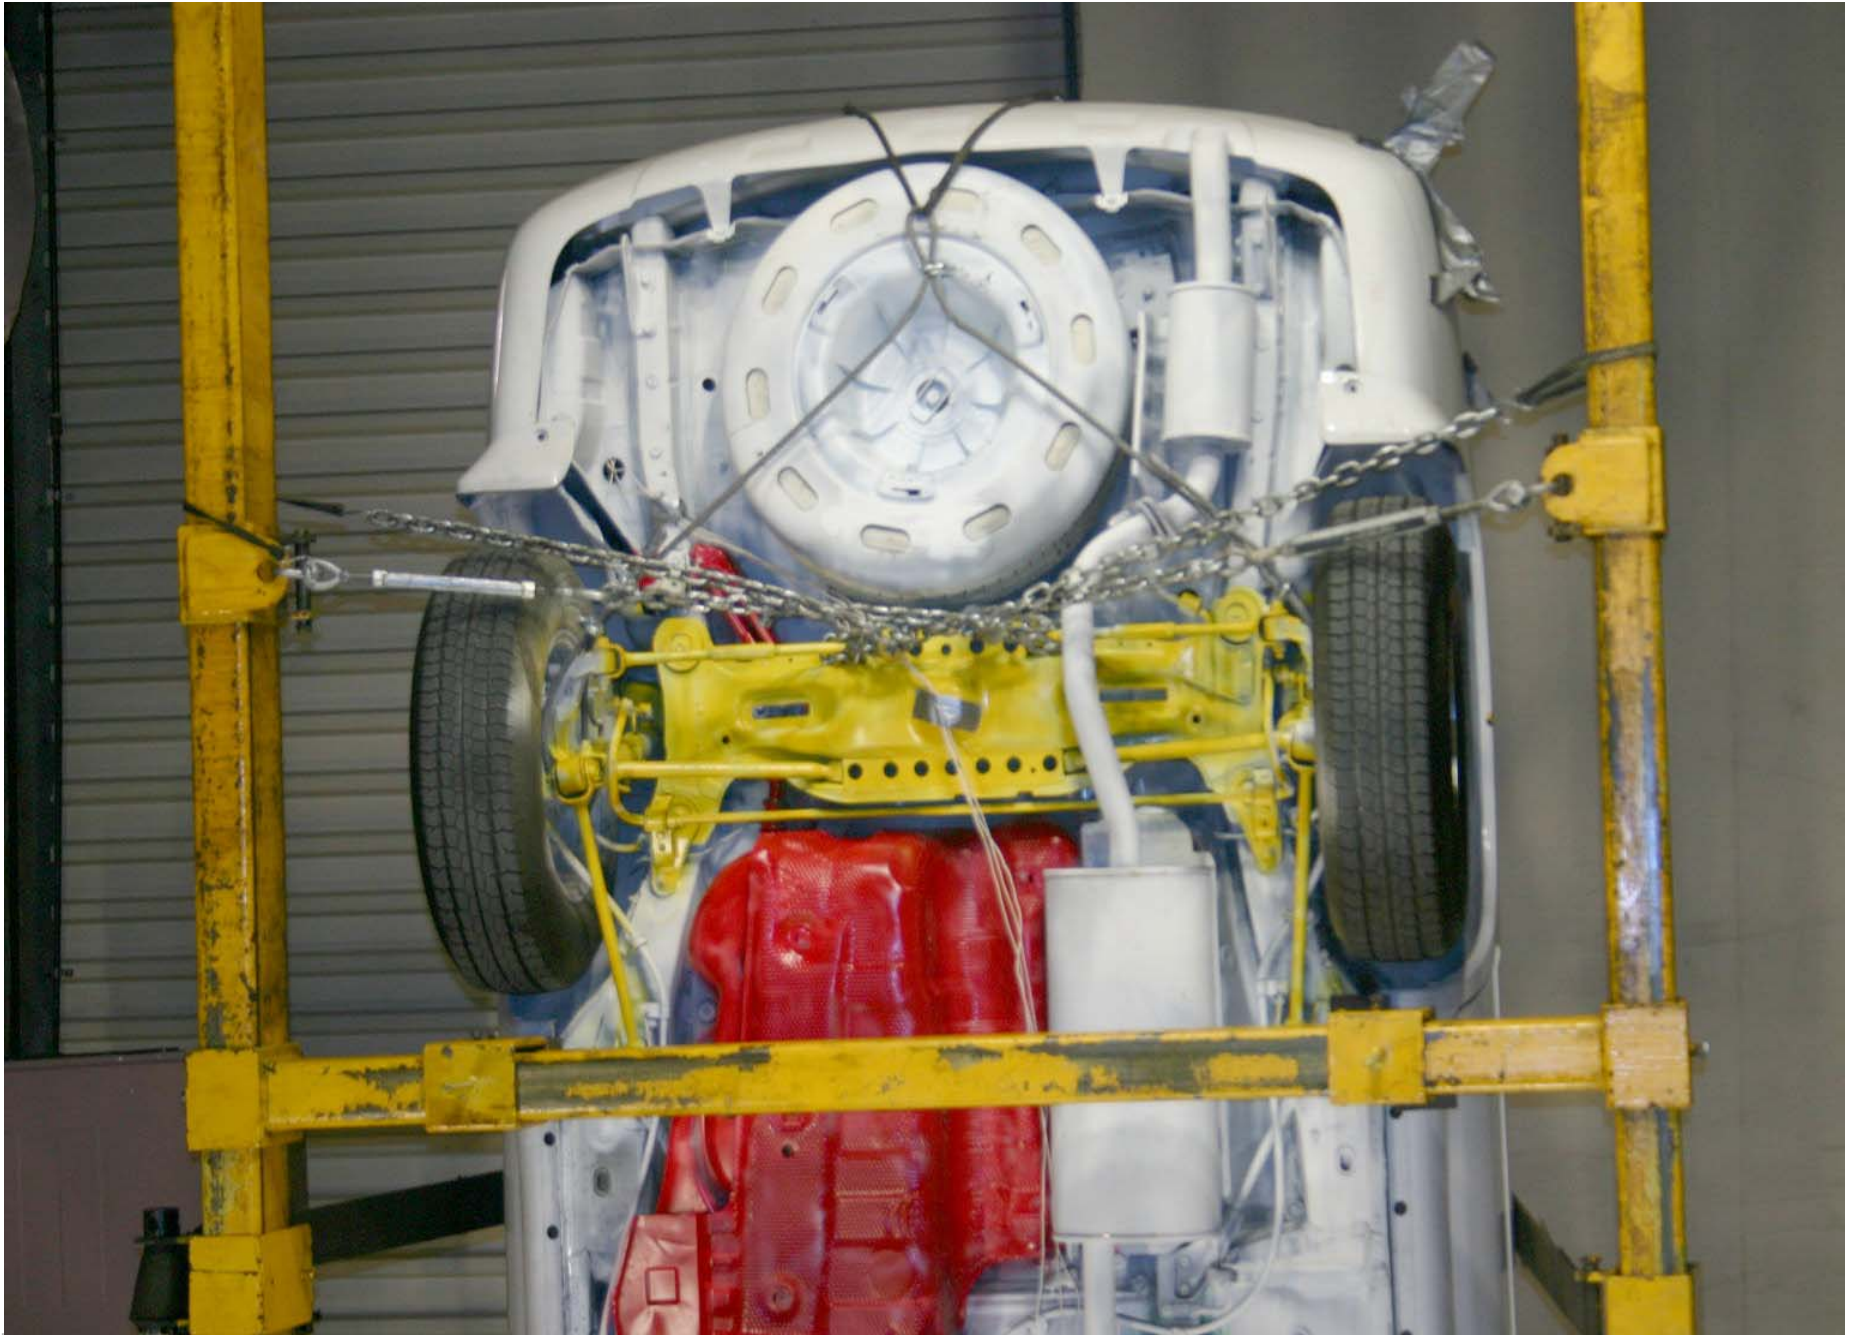

Post-Test Rear Underbody View



Pre-Test Driver Dummy Front View (head position)



Post-Test Driver Dummy Front View (head position)



Pre-Test Driver Dummy Position Left Side View



Post-Test Driver Dummy Position Left Side View



Pre-Test Driver Dummy Position Left Side View (Door Open)



Post-Test Driver Dummy Position Left Side View (Door Open)



Pre-Test Driver Dummy Seat Position



Post-Test Driver Dummy Seat Position




Pre-Test Driver Dummy Feet Position



Post-Test Driver Dummy Feet Position



Pre-Test Driver Side Knee Bolster View

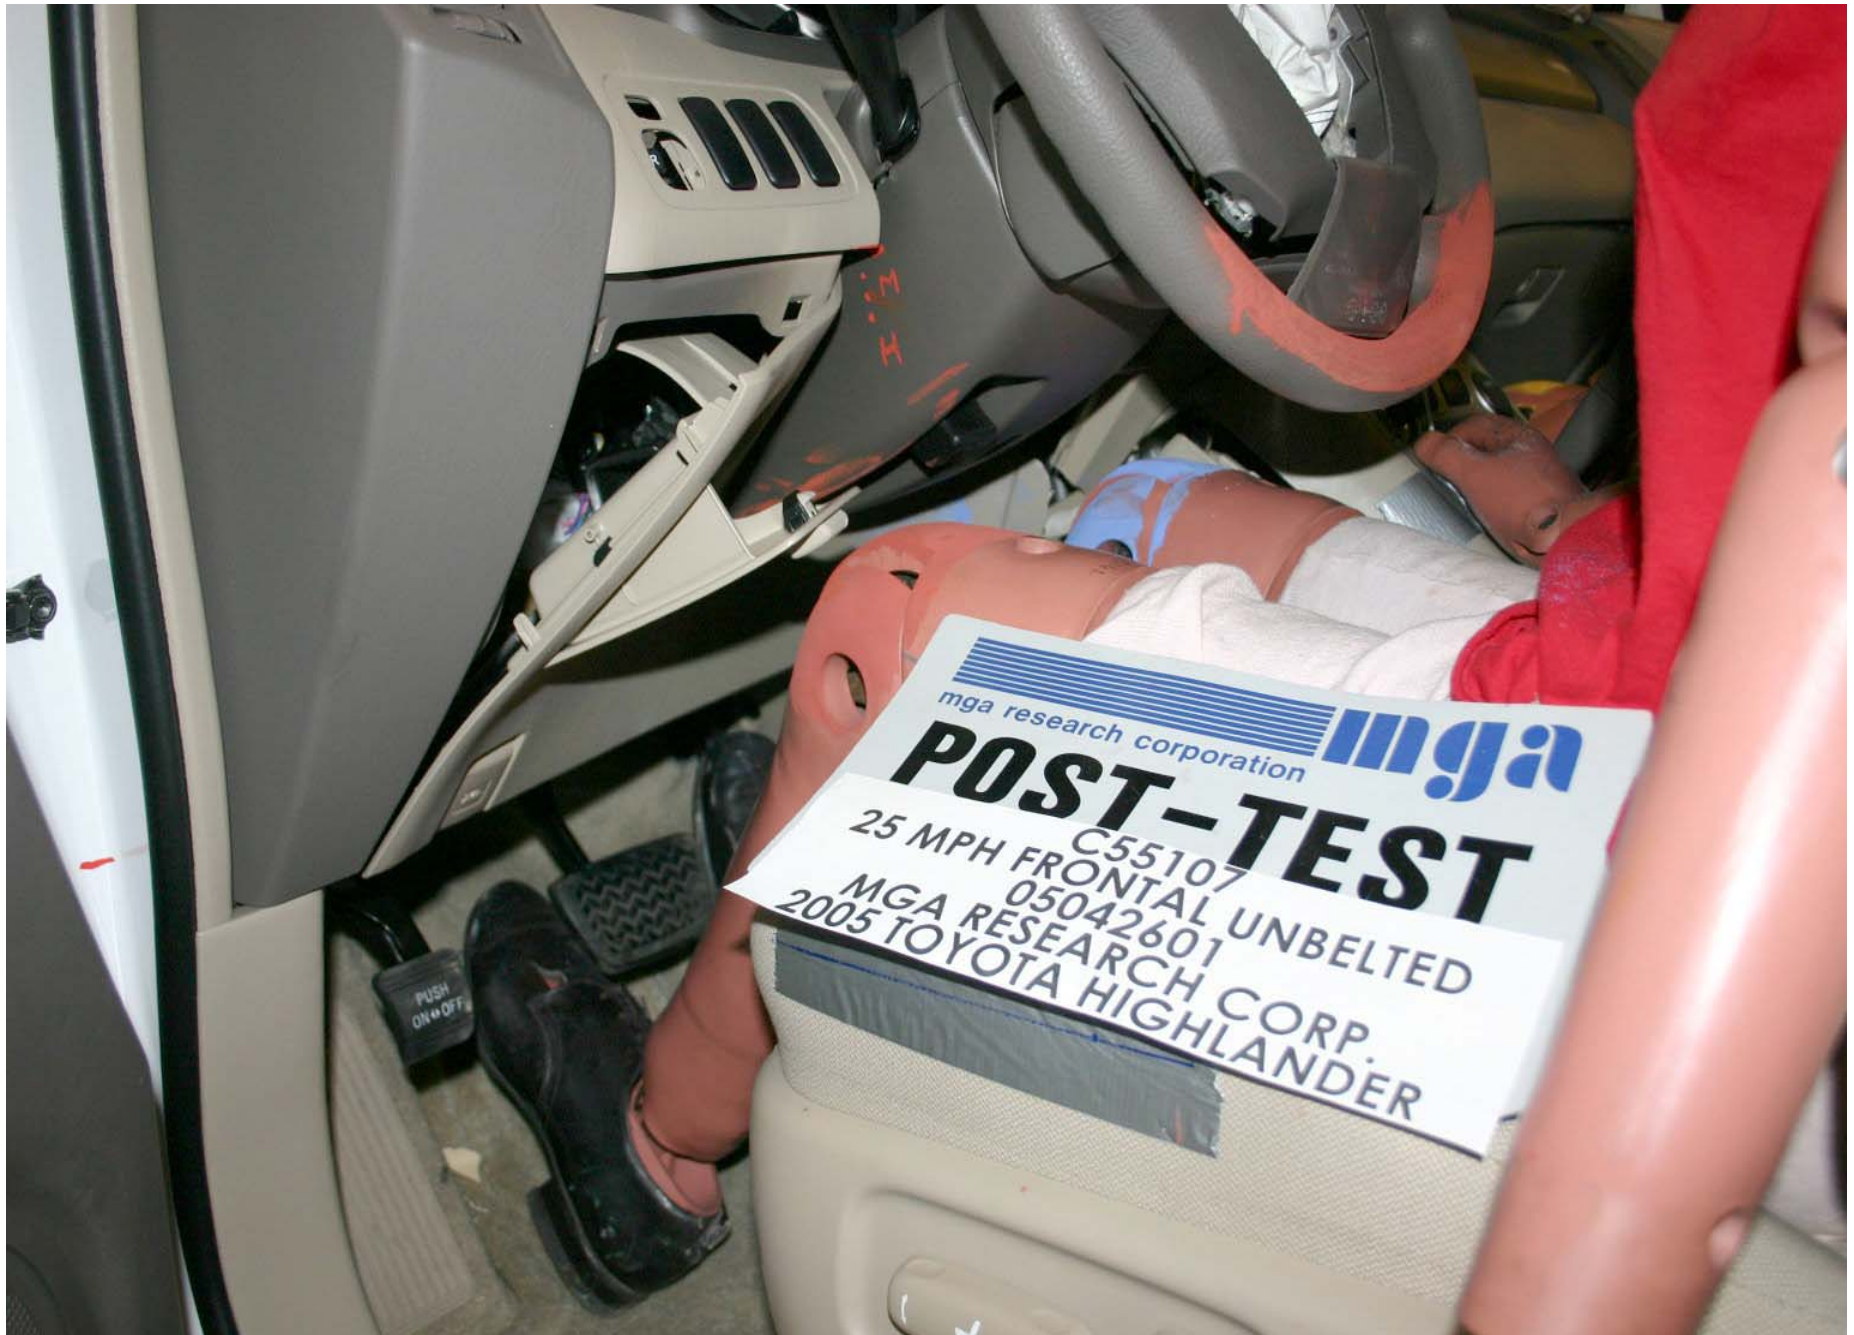

Post-Test Driver Side Knee Bolster View



Post-Test Driver Dummy Head Contact (headrest)



Post-Test Driver Knee Contact



Post-Test Driver Dummy Airbag Contact



Pre-Test Passenger Dummy Front View (head position)



Post-Test Passenger Dummy Front View (head position)



Pre-Test Passenger Dummy Position Right Side View



Post-Test Passenger Dummy Position Right Side View




Pre-Test Passenger Dummy Position Right Side View (Door Open)



Post-Test Passenger Dummy Position Right Side View (Door Open)




Pre-Test Passenger Dummy Seat Position

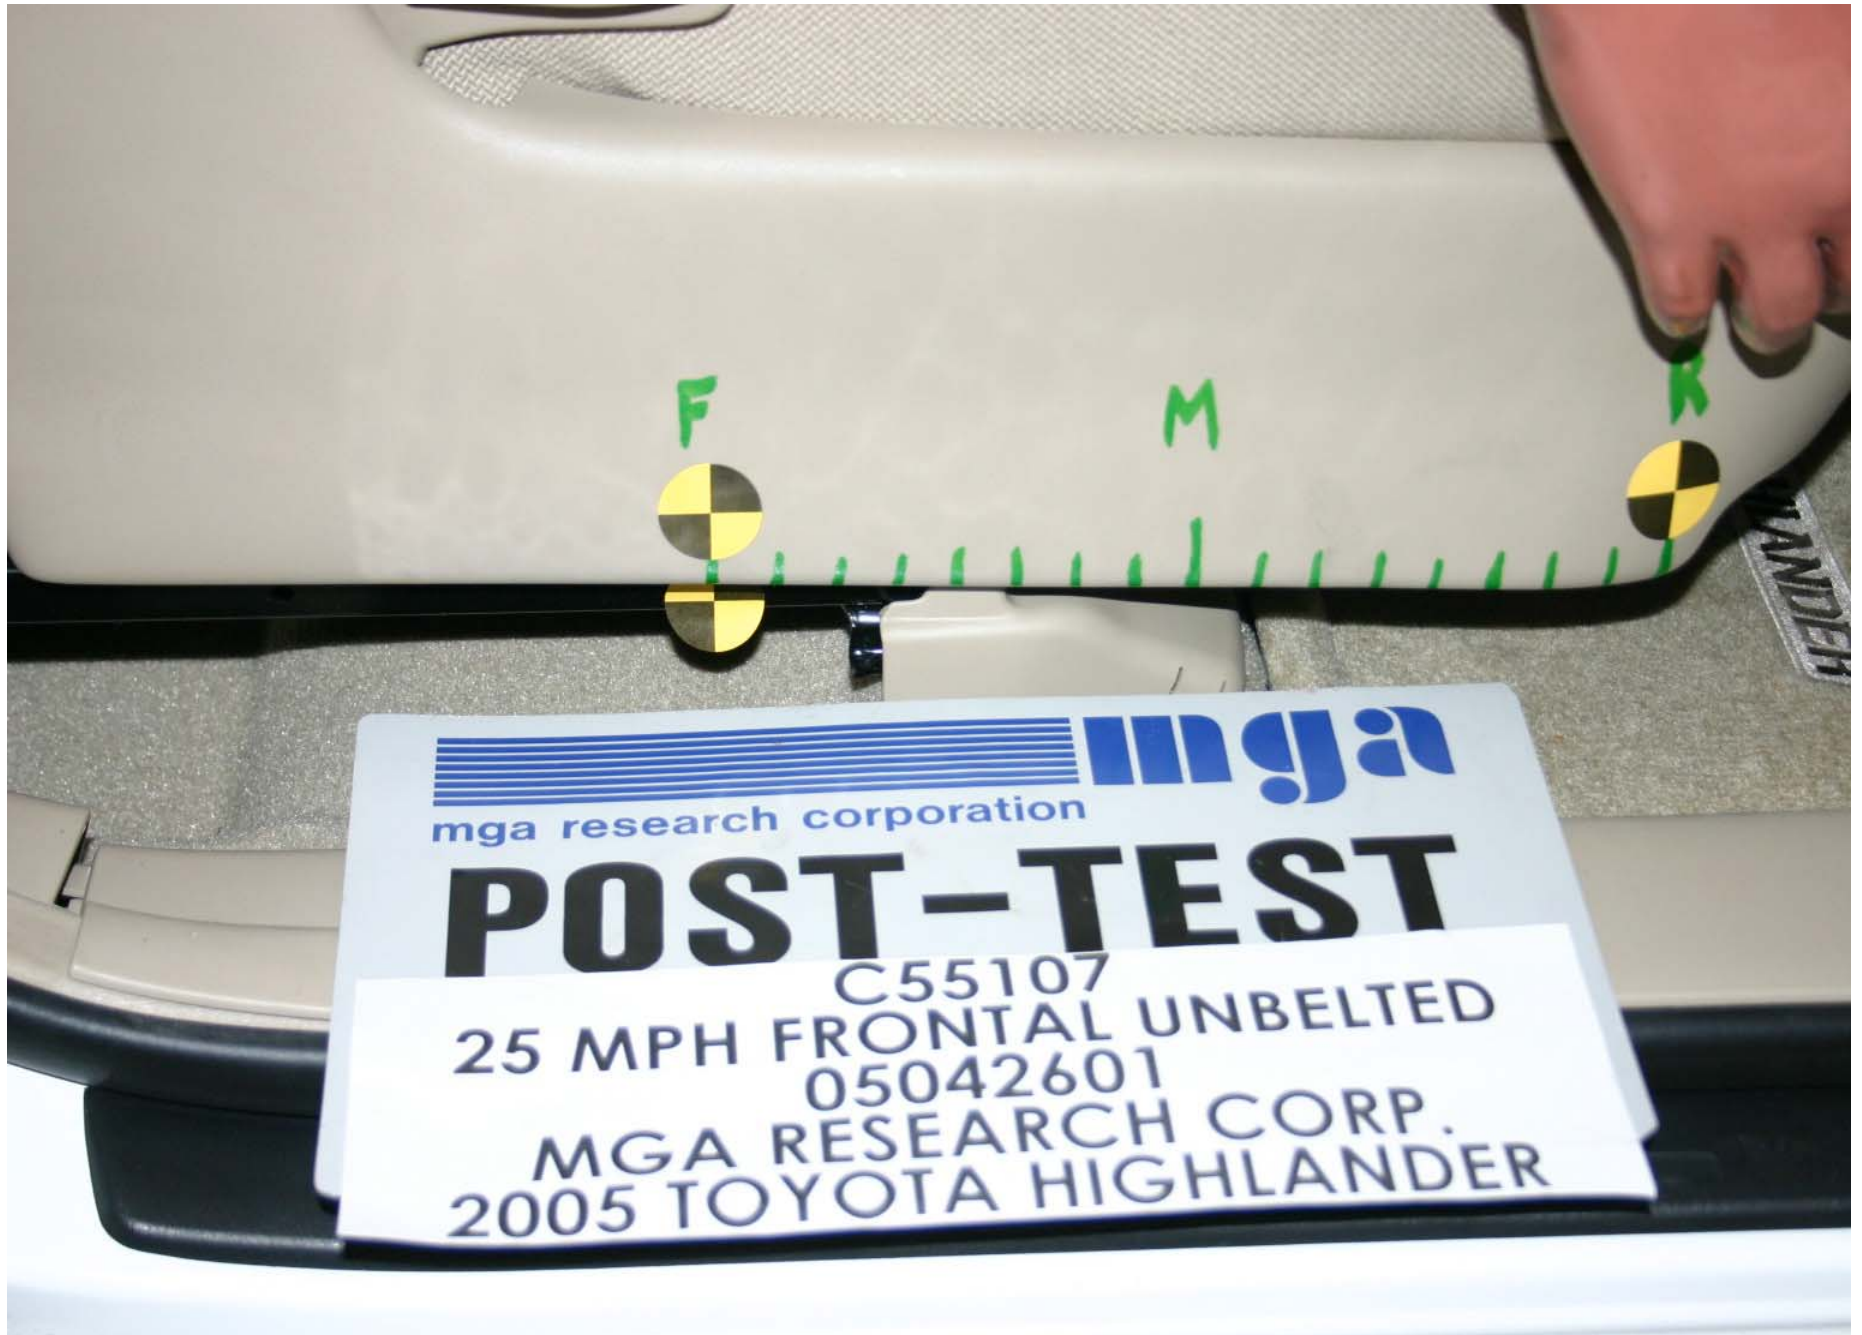

Post-Test Passenger Dummy Seat Position



Pre-Test Passenger Dummy Feet Position

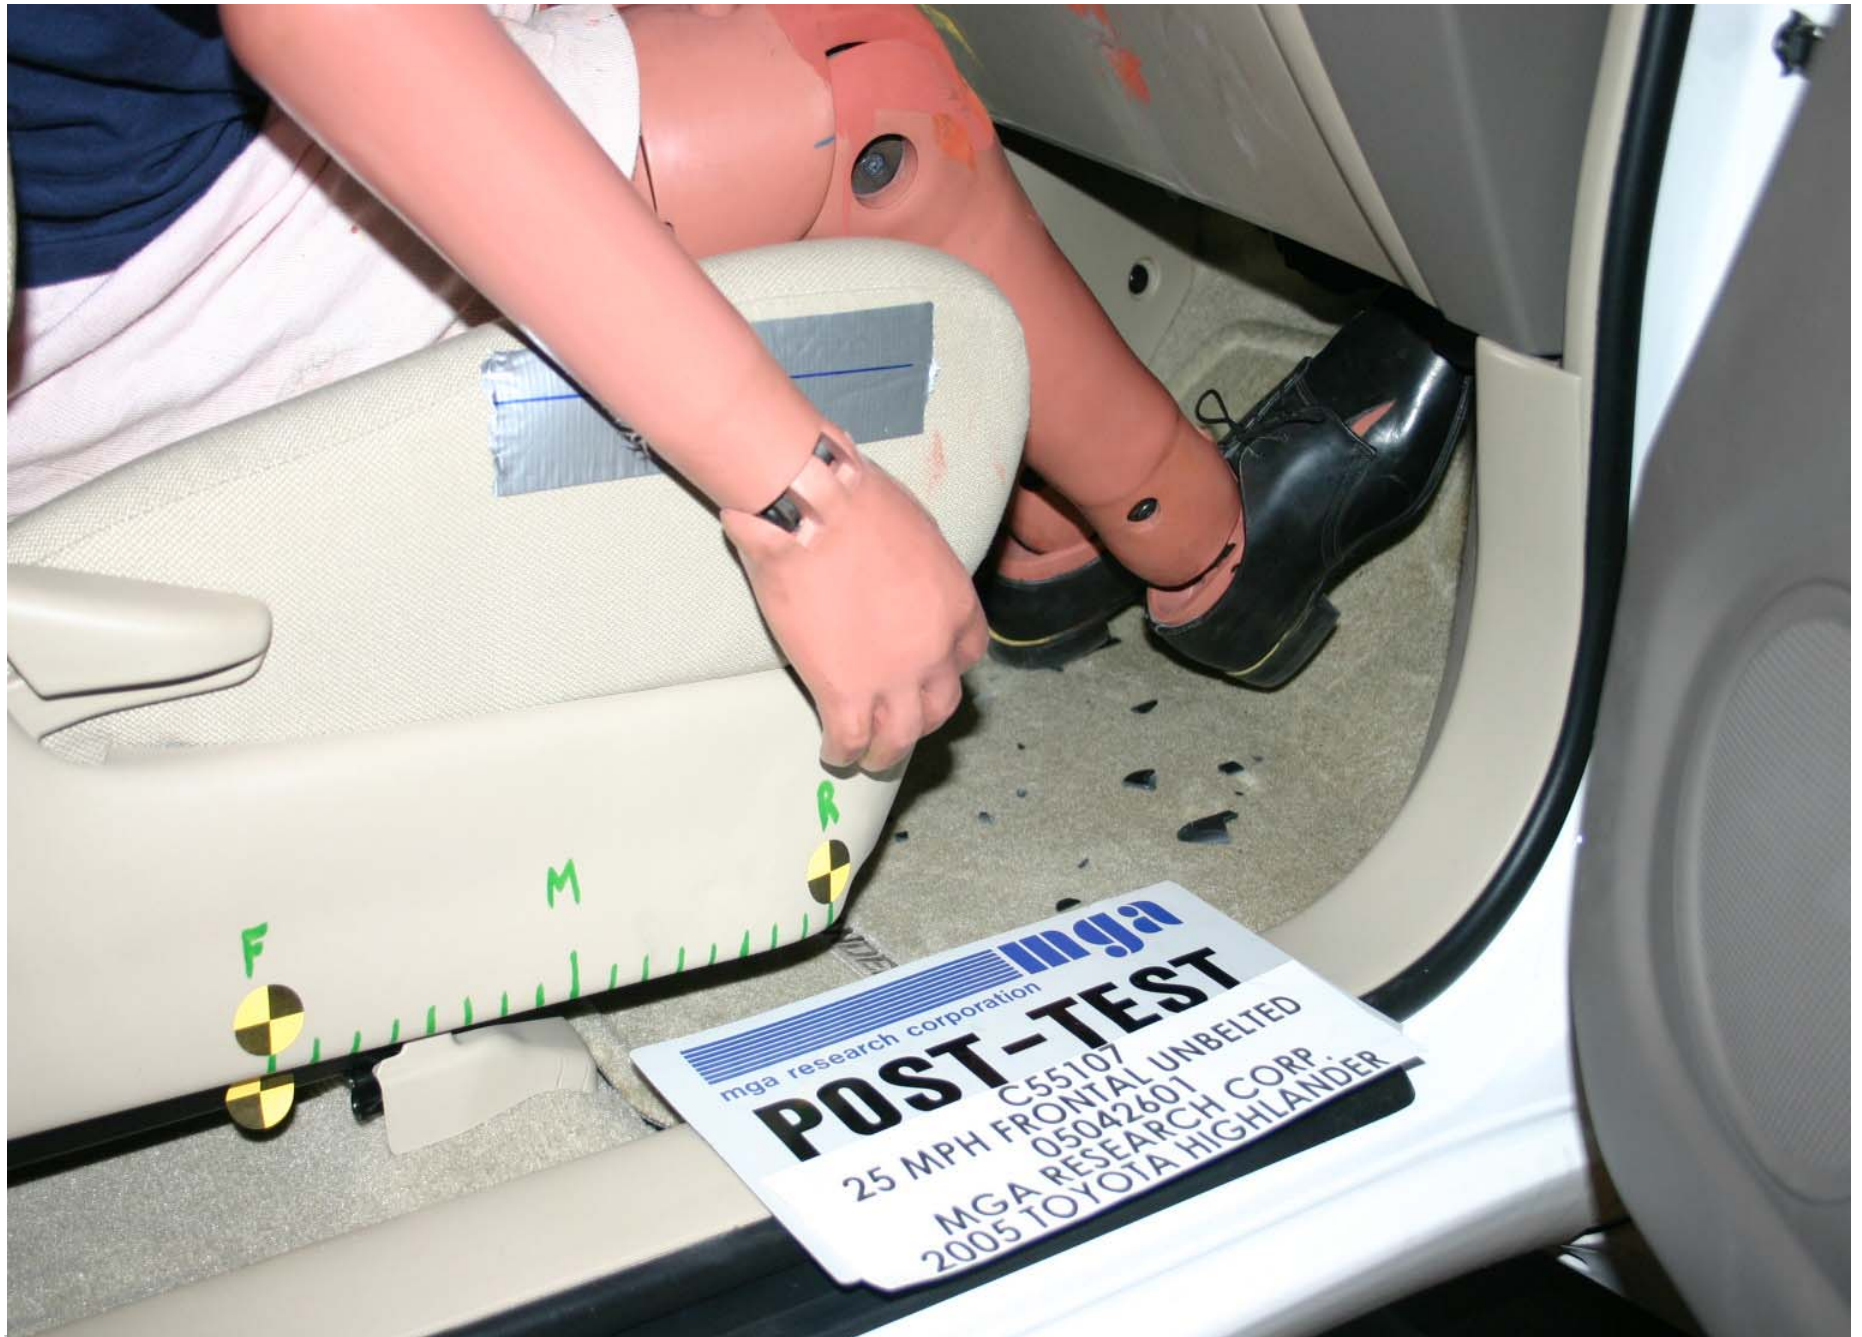

Post-Test Passenger Dummy Feet Position



Pre-Test Passenger Side Knee Bolster View



Post-Test Passenger Side Knee Bolster View



Post-Test Passenger Dummy Knee Contact



Post-Test Passenger Dummy Airbag Contact



B-60


Rollover 90 Degrees




B-61

Rollover 180 Degrees

B-62

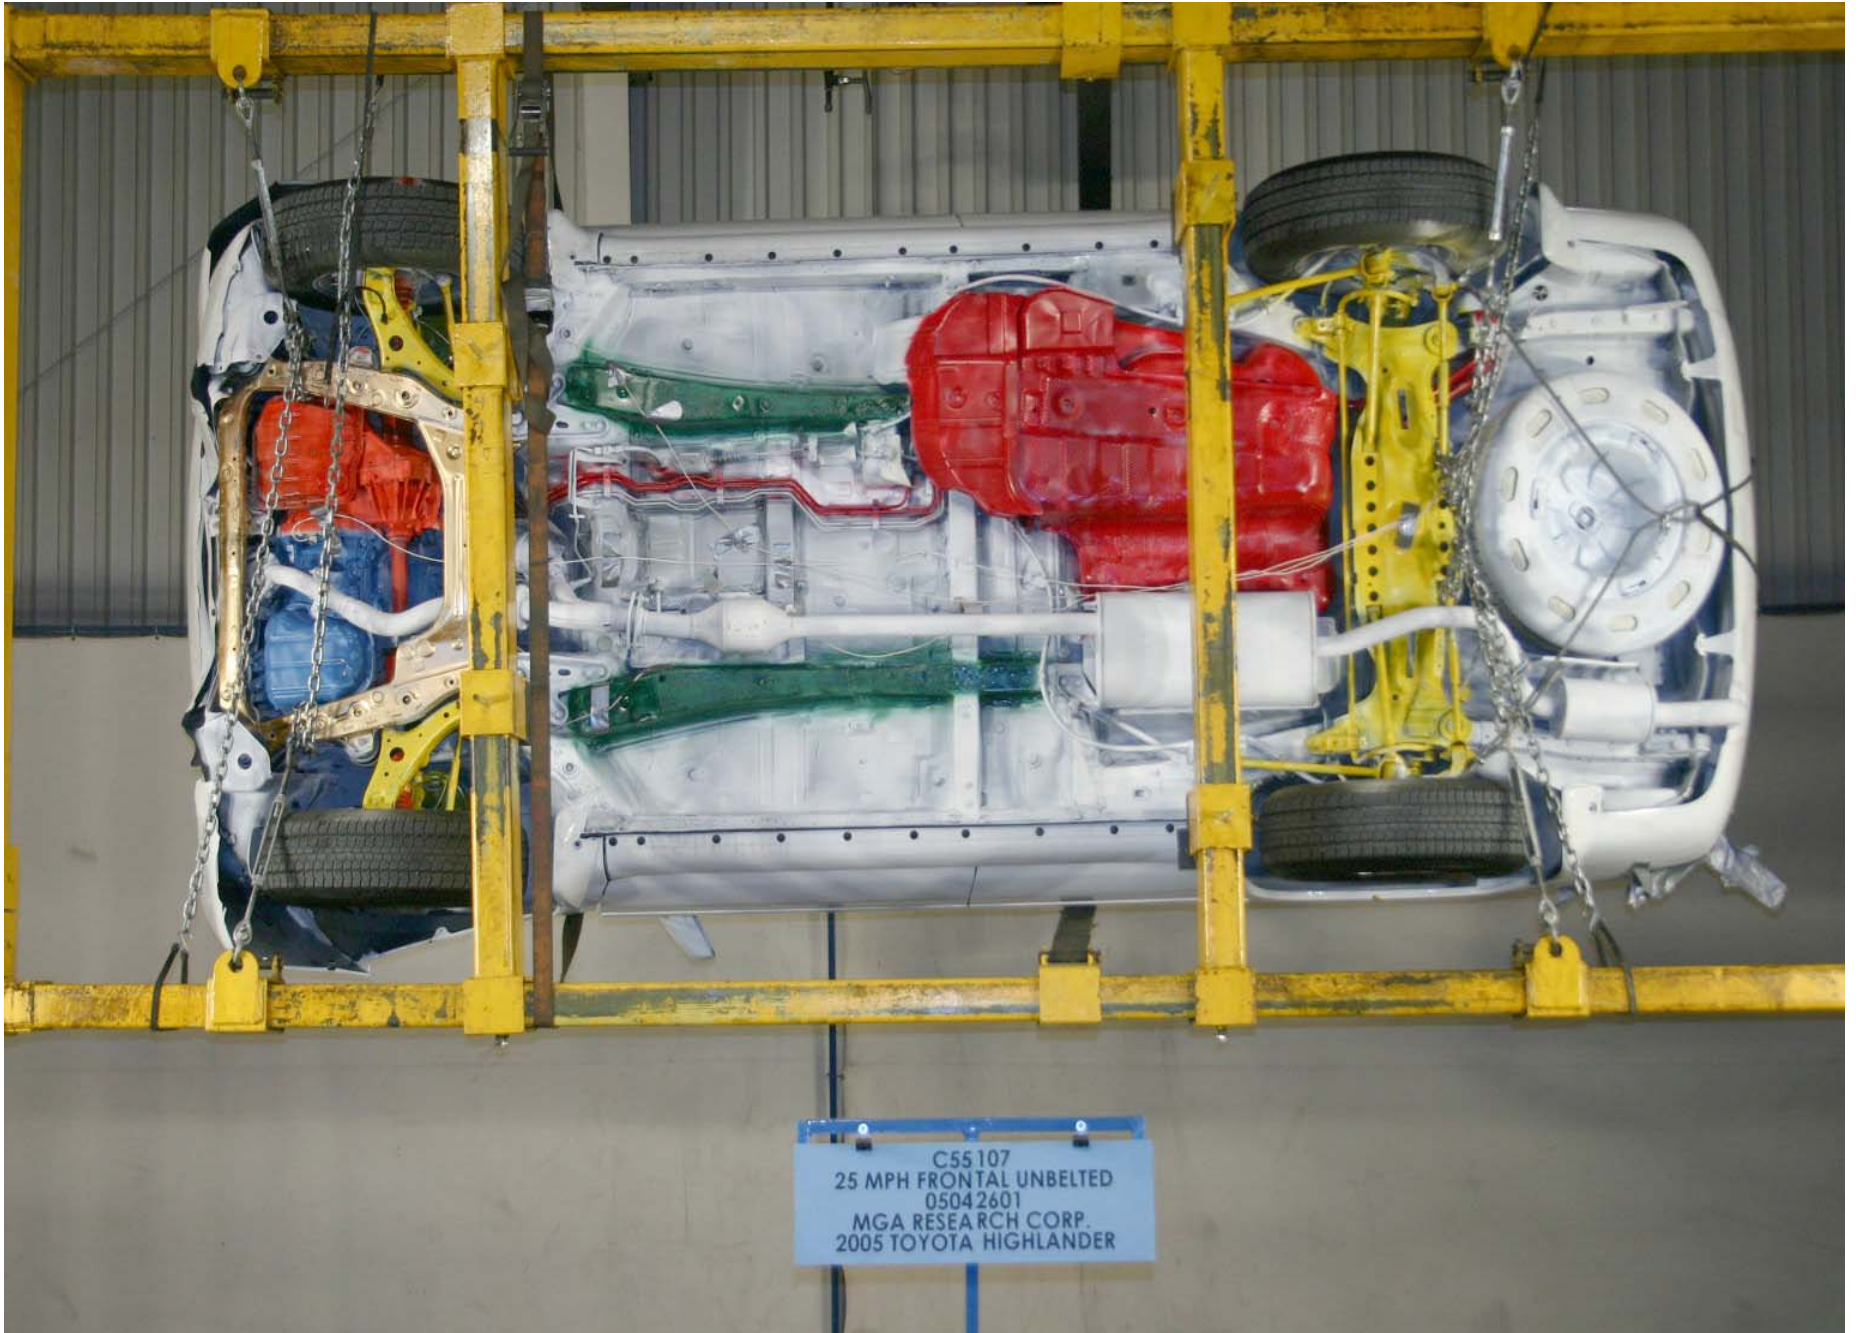

Rollover 270 Degrees

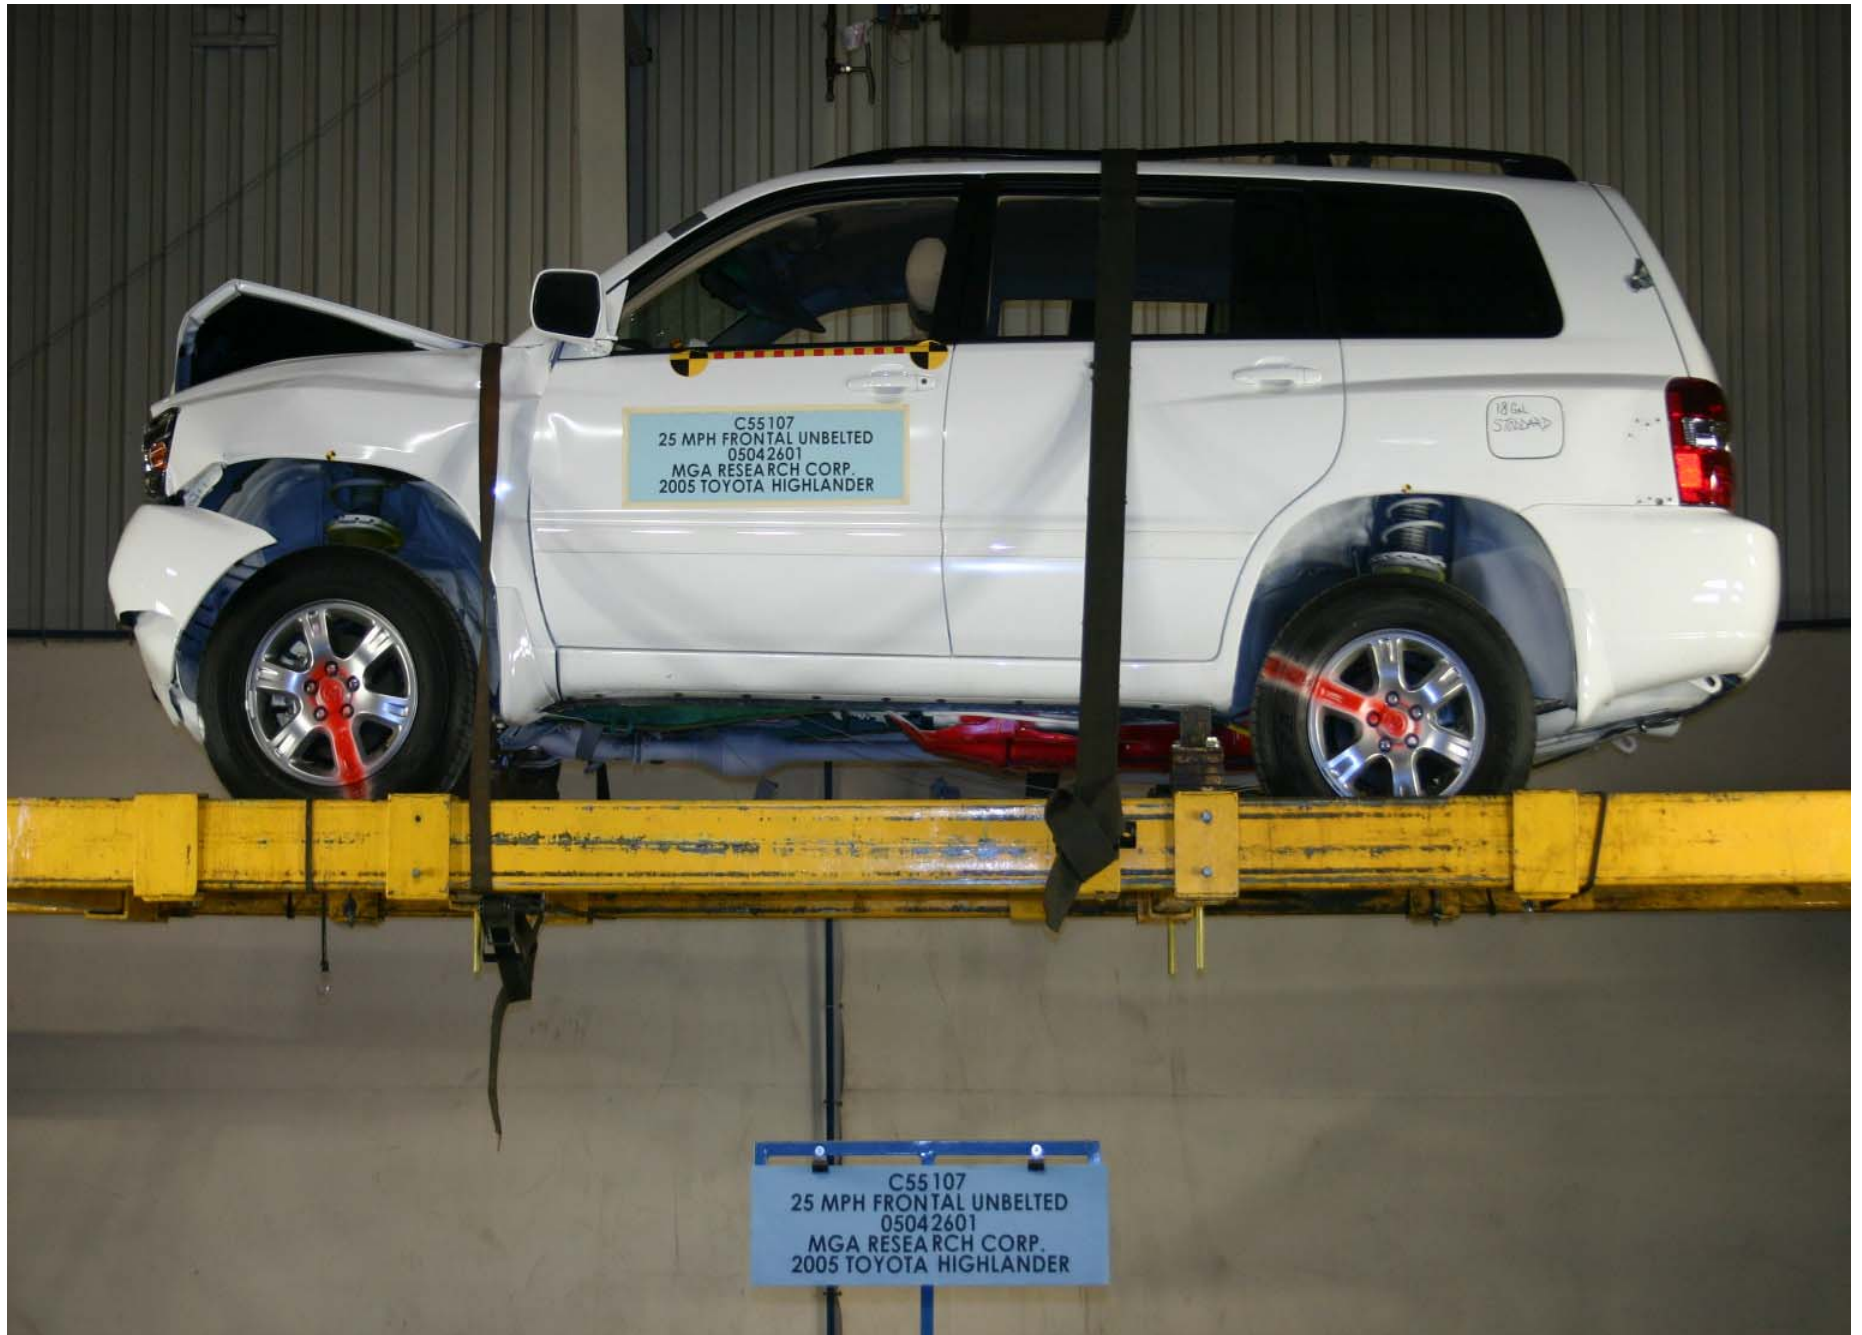

Rollover 360 Degrees


B-64



T0: 0 • Frame: 89 • 1,000 fps • 26 Apr 2005 11:28

Vehicle Impact

B-65

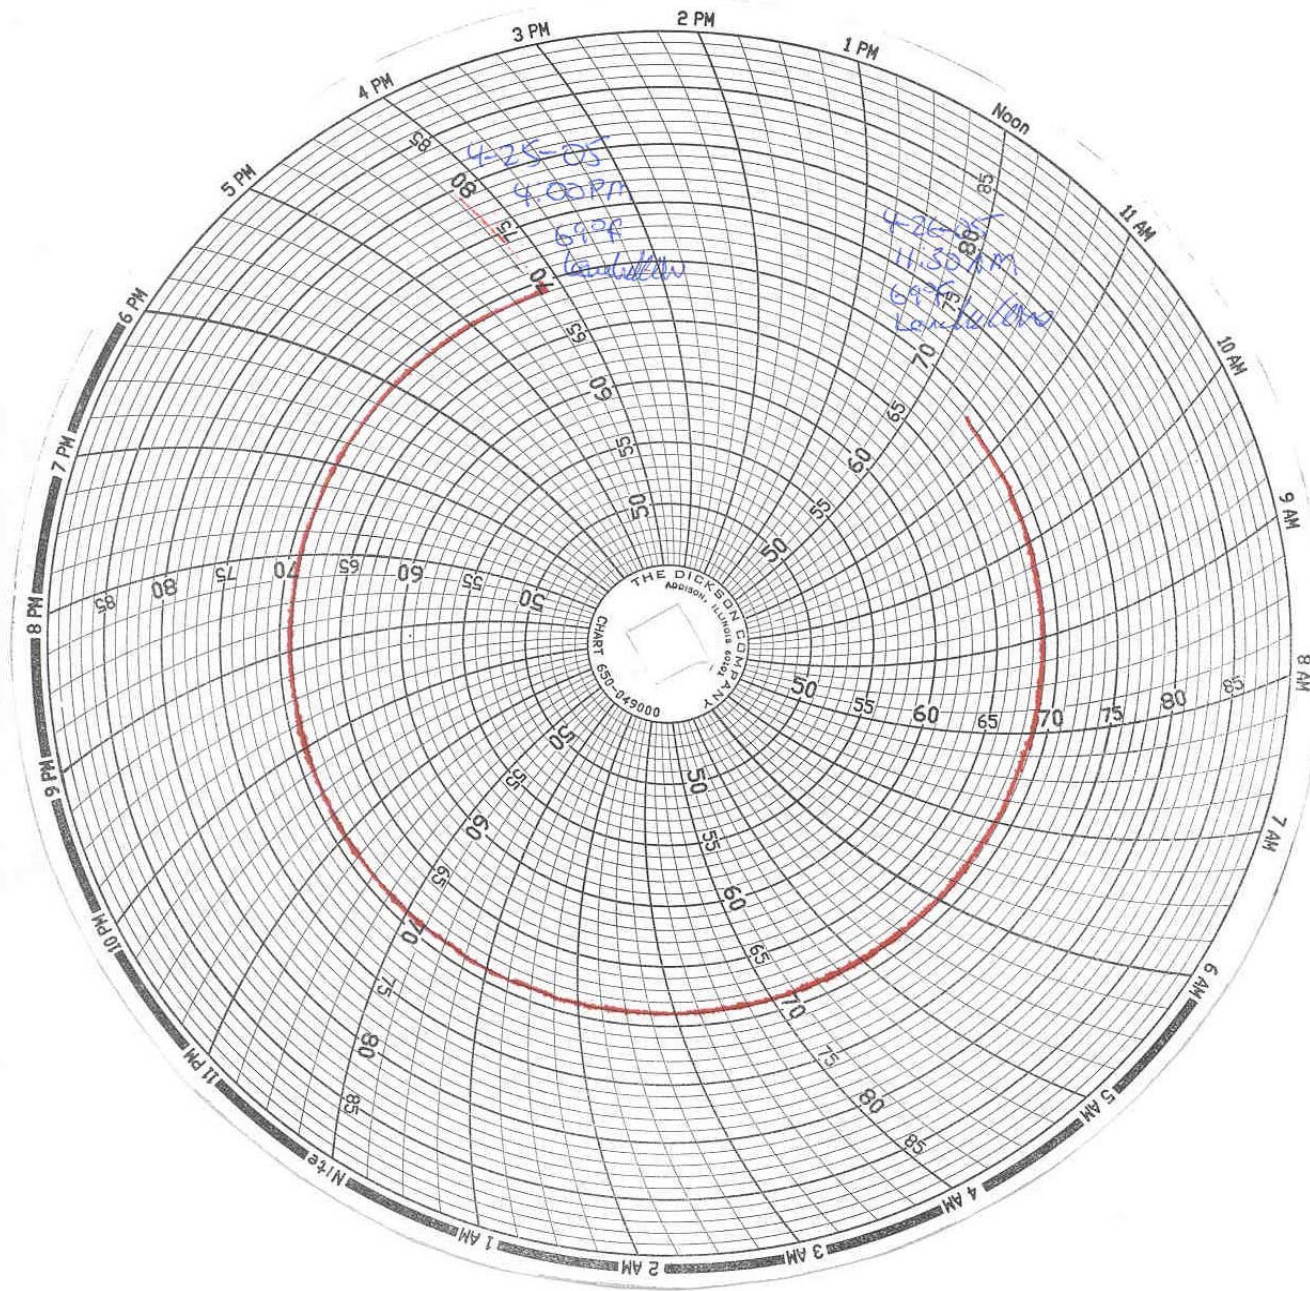

Temperature Plot



Vehicle in Relation to The Load Cell Grid

APPENDIX C
INSTRUMENTATION CALIBRATION

INSTRUMENTS FOR DRIVER DUMMY NO. 506

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AGTM8	Endevco	03/02/05
Head Y	AMRR4	Endevco	03/02/05
Head Z	P27012	Endevco	03/02/05
Neck Load Cell	376	Denton	04/11/05
Chest X	AJ819	Endevco	01/26/05
Chest Y	AJ7A2	Endevco	01/26/05
Chest Z	AJ9J7	Endevco	01/26/05
Chest Displacement	506	Servo	12/17/04
Left Femur Load Cell	946	GSE	01/24/05
Right Femur Load Cell	945	GSE	01/24/05

INSTRUMENTS FOR PASSENGER DUMMY NO. 511

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AP2D6	Endevco	03/15/05
Head Y	AHR15	Endevco	03/15/05
Head Z	J21612	Endevco	03/15/05
Neck Load Cell	253	Denton	11/15/04
Chest X	AHY71	Endevco	03/15/05
Chest Y	B05-J18	Entran	03/15/05
Chest Z	F11-H01	Entran	03/15/05
Chest Displacement	511	Servo	12/23/04
Left Femur Load Cell	9428	GSE	03/07/05
Right Femur Load Cell	9427	GSE	03/07/05

VEHICLE INSTRUMENTS

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Left Rear Seat Crossmember X	K03-J17	Entran	01/21/05
Right Rear Seat Crossmember X	B19-Z09	Entran	03/09/05
Top of Engine X	C04-L15	Entran	03/24/05
Bottom of Engine X	C10-Z03	Entran	03/31/05
Left Brake Caliper X	J07-M13	Entran	10/29/04
Right Brake Caliper X	J07-M16	Entran	10/29/04
Instrument Panel X	C04-L14	Entran	03/24/05
Trunk Z	B28-Z15	Entran	03/17/05