

**REPORT NO. 111-KAR-09-005**

**SAFETY COMPLIANCE TESTING  
FOR FMVSS 111**

**REARVIEW MIRRORS  
(Other Than School Buses)**

**2009 AUDI A6  
4-DOOR SEDAN**

**NHTSA NO: C95800**

**PREPARED BY:  
KARCO ENGINEERING LLC.  
9270 HOLLY ROAD  
ADELANTO, CALIFORNIA 92301**




**JULY 22, 2009**


**FINAL REPORT**


**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
ENFORCEMENT  
OFFICE OF VEHICLE SAFETY COMPLIANCE  
MAIL CODE: NVS-221  
1200 NEW JERSEY AVE SE, ROOM W43-498  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, under Contract DTNH22-06-C-00034.


This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:  Date: July 22, 2009  
Mr. Jonathan F. Williams, Test Engineer  
KARCO Engineering, LLC.

Reviewed by:  Date: July 22, 2009  
Mr. Michael L. Dunlap, Director of Operations  
KARCO Engineering, LLC.

Approved by:  Date: July 22, 2009  
Mr. Frank D. Richardson, Program Manager  
KARCO Engineering, LLC.

FINAL REPORT ACCEPTED BY:

Accepted By: 

Acceptance Date: 7/30/09

### Technical Report Documentation Page

<p>1. <i>Report No.</i> 111-KAR-09-005</p>	<p>2. <i>Government Accession No.</i></p>	<p>3. <i>Recipient's Catalog No.</i></p>	
<p>4. <i>Title and Subtitle</i> Final Report of FMVSS 111 Compliance Testing of 2009 Audi A6 4-Door Sedan NHTSA NO: C95800</p>		<p>5. <i>Report Date</i> July 22, 2009</p>	
		<p>6. <i>Performing Organization Code</i> KAR</p>	
<p>7. <i>Author(s)</i> Mr. Jonathan F. Williams, Test Engineer, KARCO Mr. Frank D. Richardson, Program Manager, KARCO</p>		<p>8. <i>Performing Organization Report No.</i> TR-P29011-05-NC</p>	
<p>9. <i>Performing Organization Name and Address</i> KARCO Engineering LLC. 9270 Holly Road Adelanto, California 92301</p>		<p>10. <i>Work unit No.</i></p>	
		<p>11. <i>Contract or Grant No.</i> DTNH22-06-C-00034</p>	
<p>12. <i>Sponsoring Agency Name and Address</i> U.S. Department of Transportation National Highway Traffic Safety Administration Enforcement Office of Vehicle Safety Compliance Mail Code: NVS-221 1200 New Jersey Ave SE, Room W43-410 Washington, DC 20590</p>		<p>13. <i>Type of report and Period Covered</i> Final Report-</p>	
		<p>14. <i>Sponsoring Agency Code</i> NVS 221</p>	
<p>15. <i>Supplementary Notes</i></p>			
<p>16. <i>Abstract</i></p> <p>Compliance tests were conducted on the subject 2009 Audi A6 4-Door Sedan on July 13, 2009 through July 22, 2009 in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP111V-00 for the determination of FMVSS 111 compliance. There were no apparent test failures.</p>			
<p>17. <i>Key Words</i></p> <p>Compliance Testing Safety Engineering FMVSS 111</p>		<p>18. <i>Distribution Statement</i> Copies of this report are available from: National Highway Traffic Safety Admin. Technical Information Services (TIS) Mail Code: NVS-221 1200 New Jersey Ave SE, Room W43-410 Washington, DC 20590</p>	
<p>19. <i>Security Classification (of this report)</i> UNCLASSIFIED</p>	<p>20. <i>Security Classification (of this page)</i> UNCLASSIFIED</p>	<p>21. <i>No. of Pages</i> 69</p>	<p>22. <i>Price</i></p>

Form DOT F1700.7 (8-72)

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose of Compliance Test	1
2	Compliance Test Procedure and Data Summary	2
3	Test Data	5
<u>Appendix</u>		
A	Photographs	A
B	Data Plots	B
C	Test Equipment List and Calibration Information	C
D	Eyelipse Locations Supplied by Manufacturer and Reflectance Information	D

## LIST OF PHOTOGRAPHS

<u>Figure</u>		<u>Page</u>
1	Left Front $\frac{3}{4}$ View	A-1
2	Left Side View	A-2
3	Right Rear $\frac{3}{4}$ View	A-3
4	Right Side View	A-4
5	Manufacturer's Label	A-5
6	Tire Placard	A-6
7	Driver Side Rearview Mirror and Mounting	A-7
8	Passenger Side Rearview Mirror and Mounting	A-8
9	Inside Rearview Mirror and Mounting	A-9
10	Test Set-up	A-10
11	Camera Set-up for Photographing Reference Board	A-11
12	Overall Set-up and Instrumentation for Mirror Break-Away Test	A-12
13	Close-Up of Mirror Break-Away Test	A-13
14	Reflection Test Set-up	A-14
15	Mirror Set-up for Area Measurement	A-15
16	Left Eye Field of View Test (Inside Mirror)	A-16
17	Reference Board for Inside Mirror, Left Eye (From Rear of Vehicle)	A-17
18	Right Eye Field of View Test (Inside Mirror)	A-18
19	Reference Board for Inside Mirror, Right Eye (From Rear of Vehicle)	A-19
20	Left Eye Field of View Test (Driver Side Mirror)	A-20
21	Right Eye Field of View Test (Driver Side Mirror)	A-21
22	Reference Board for Driver Side Mirror (From Rear of Vehicle)	A-22

## LIST OF DATA PLOTS

<u>Figure</u>		<u>Page</u>
B-1	Force vs. Displacement and Displacement vs. Time $0^\circ/90^\circ$	B-1
B-2	Force vs. Displacement and Displacement vs. Time $45^\circ/90^\circ$	B-2
B-3	Force vs. Displacement and Displacement vs. Time $-45^\circ/90^\circ$	B-3
B-4	Force vs. Displacement and Displacement vs. Time $-45^\circ/45^\circ$	B-4
B-5	Force vs. Displacement and Displacement vs. Time $45^\circ/45^\circ$	B-5
B-6	Force vs. Displacement and Displacement vs. Time $45^\circ/-45^\circ$	B-6
B-7	Force vs. Displacement and Displacement vs. Time $-45^\circ/-45^\circ$	B-7

## 1. PURPOSE OF COMPLIANCE TEST

Tests were conducted on a 2009 Audi A6 4-Door Sedan, manufactured by Audi AG., to determine compliance with FMVSS 111, "Rearview Mirrors (Other than School Buses)". The purpose of this standard is to reduce the number of deaths and injuries that occur when the driver of a motor vehicle does not have a clear and reasonably unobstructed view to the rear.

All tests were conducted based on the current National Highway Traffic Safety Administration (NHTSA), Office of Vehicle Safety Compliance (OVSC) Laboratory Procedures, TP111V-00, dated October 28, 1999, and corresponding KARCO Engineering test procedure KTP-111, dated April 18, 2001. Detailed procedures for receiving, inspecting, testing and reporting of test results are described in the test procedures and are not repeated in this report.

This report is organized in sections containing pertinent test information and data tables as follows:

Section 1	Purpose of Compliance Test
Section 2	Compliance Test Procedure and Data Summary
Section 3	Test Data
Appendix A	Photographs
Appendix B	Data Plots
Appendix C	Test Equipment List and Calibration Information
Appendix D	Eyellipse Location Supplied By Manufacturer

## **2. COMPLIANCE TEST PROCEDURE AND DATA SUMMARY**

A 2009 Audi A6 4-Door Sedan was subjected to FMVSS 111 compliance testing. The tests were conducted at KARCO Engineering LLC. in Adelanto, California on July 13, 2009 through July 22, 2009. Summary data is shown on page 24, Data Sheet No. 8. The following tests were performed:

- Inspection
- Mounting Adequacy Test
- Field-of-View Test, Inside Rearview Mirror
- Field-of-View Test, Driver's Side Outside Mirror
- Reflectance Test
- Breakaway Test
- Unit Magnification and Convex Mirror Tests

The tests were conducted per the FMVSS 111 test procedure. The significant aspects of the test procedure are described in the following paragraphs.

### **A. INSPECTION**

Inspect the installation of the inside and outside rearview mirrors.

### **B. MOUNTING ADEQUACY TEST – ALL REARVIEW MIRRORS**

#### **B.1 INSIDE MIRROR (S5.1.2)**

Determine that the mirror is securely mounted and determine the positive and negative angles of adjustment for both the vertical and horizontal directions.

#### **B.2 OUTSIDE MIRROR(S) (S5.2.2 and S5.3)**

Determine that the mirror(s) is (are) securely mounted. Determine that the driver's side mirror can be tilted in both horizontal and vertical directions from the driver's seated position. Determine that the passenger's side mirror is capable of adjustment by tilting in both the horizontal and vertical directions. Determine the positive and negative angles of adjustment for both horizontal and vertical directions for all outside mirrors. Determine that all outside mirrors are free of sharp points or edges that could contribute to pedestrian injury.

**C. FIELD-OF-VIEW TEST – INSIDE REARVIEW MIRROR**

**C.1 REQUIREMENTS (S5.1.1)**

The mirror shall provide a field of view with an included horizontal angle measured from the projected eye point of at least 20 degrees, and sufficient vertical angle to provide a view of a level road surface extending to the horizon beginning at a point not greater than 61m (200 feet) to the rear of the vehicle when the vehicle is occupied by the driver and four passengers or the designated occupant capacity, if less. The line of sight may be partially obscured by seated occupants or by head restraints.

Each car whose inside mirror does not meet the field of view requirements of S5.1.1 shall have an outside mirror of unit magnification or a convex mirror installed on the passenger's side. (S5.3)

**D. FIELD-OF-VIEW TEST, DRIVER'S SIDE OUTSIDE REARVIEW MIRROR**

**D.1 REQUIREMENTS (S5.2)**

Each passenger car shall have an outside mirror of unit magnification. The mirror shall provide the driver a view of a level road surface extending to the horizon from a line, perpendicular to a longitudinal plane tangent to the driver's side of the vehicle at the widest point, extending 2.4 meters (8 feet) out from the tangent plane 10.7 meters (35 feet) behind the driver's eyes, with the seat in the rearmost position. The line of sight may be partially obscured by rear body or fender contours. (S5.2.1)

Neither the mirror nor the mounting shall protrude farther than the widest part of the vehicle body except to the extent necessary to produce a field of view meeting or exceeding the requirements of S5.2.1. The mirror shall not be obscured by the un-wiped portion of the windshield. (S5.2.2)

**E. REFLECTANCE TEST – ALL MIRRORS**

**E.1 REQUIREMENT (S11)**

All single reflectance mirrors shall have an average reflectance of at least 35 percent. If a mirror is capable of multiple reflectance levels, the minimum reflectance level in the day mode shall be at least 35 percent and the minimum reflectance level in the night mode shall be at least 4 percent. The average reflectance of any mirror required by this standard shall be determined in accordance with SAE Recommended Practice J964, OCT 84.

**F. BREAKAWAY TEST – INSIDE REARVIEW MIRROR**

**F.1 REQUIREMENTS (S5.1.2)**

If the mirror is in the head impact area, the mounting shall deflect, collapse, or break away without leaving sharp edges when the reflective surface of the mirror is subjected to a force of 400 N (90 lb) in any forward direction that is not more than 45 degrees from the longitudinal direction.



## **G. UNIT MAGNIFICATION AND CONVEX MIRROR TESTS**

### **G.1 REQUIREMENTS FOR PASSENGER CARS (S5.3 and S5.4)**

The driver's side rearview mirror and the inside rearview mirror shall be unit magnification. If the field-of-view requirements are not met with the inside rearview mirror then the passenger's side rearview mirror is required. It can be either unit magnification or convex.

If the passenger's side mirror is convex, the average radius of curvature shall be not less than 889 mm (35 inches) and not more than 1651 millimeters (65 inches) and shall not deviate from the average by more than plus or minus 12.5 percent. The convex mirror shall have permanently and indelibly marked at the lower edge of the mirror's reflective surface in letters not less than 4.8 mm (3/16 inch) nor more than 6.4 mm (0.25 inch) high the words, "**Objects in Mirror Are Closer Than They Appear.**"

### **3. TEST DATA**

The results of FMVSS 111 compliance tests that were conducted on the 2009 Audi A6 4-Door Sedan on July 13, 2009 through July 22, 2009 to determine compliance with FMVSS 111, "Rearview Mirrors (other than School Buses)" are presented in this section.

**DATA SHEET NO. 1**  
**VEHICLE INSPECTION AND IDENTIFICATION**

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.:	C95800
Make	Audi
Model	A6
Body Style	4-Door Sedan
Vin No.	WAUCH74F29N022298
Color	Gray
Delivery Date	7/3/2009
Odometer (Miles)	1026
Dealer	University Park Audi
Transmission	Automatic
Final Drive	AWD
Type/No. Cyl.	V-6
Engine Disp. (L)	3.123
Engine Placement	Longitudinal
Tire Press./ Max (Front)	350 kPa
Tire Press./ Max (Rear)	350 kPa
Recommended Tire Size	245/40R18 97H
Tire Size on vehicle	245/40R18 97H
Air Conditioning	Yes
Disc Brakes (Front)	Yes
Disc Brakes (Rear)	Yes

Anti-Lock Brakes	Yes
All Wheel Drive	Yes
Power Steering	Yes
Driver Front Airbag	Yes
Driver Side Airbag	Yes
Driver Head Airbag	No
Driver Curtain Airbag	Yes
Pass. Airbag	Yes
Pass. Side Airbag	Yes
Pass. Head Airbag	No
Pass. Curtain Airbag	Yes
Pre-Tensioners	Yes
Load Limiters	Yes
Bucket Seats	Yes
Cold Tire Press. (Front)	270 kPa
Cold Tire Press. (Rear)	270 kPa
Tilt Steering	Yes
Automatic Door Locks	Yes
Power Windows	Yes
Power Seats	Yes
Other	N/A

**DATA FROM MANUFACTURER**

Manufactured By	Audi AG
Date of Manufacture	Nov-08

GVWR (kg)	2264
GAWR Front (kg)	1190
GAWR Rear (kg)	1175

**TEST VEHICLE ATTITUDES (mm)**

ATTITUDE	LF	RF	LR	RR
As Delivered	712	715	714	715
As Tested	695	699	685	684
Rearview Mirror	1237			

**DATA SHEET NO. 1... (Continued)**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Audi
<b>Model:</b>	A6	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95800	<b>VIN</b>	WAUCH74F29N022298
<b>Test Date:</b>	07/13/09	<b>Temperature:</b>	80°F

LEGEND: LE = Left Eye; RE = Right Eye; P = Neck Pivot Point, SRP = Seating Reference Point

COORDINATE SYSTEM:

- X = Longitudinal Dimension
- Y = Lateral Dimension
- Z = Vertical Dimension

Positive Values are as follows:

- X = Forward of Reference Point
- Y = Outboard of Reference Point (to driver's side)
- Z = Above Reference Point

Provide Reference Point or Body Fiducial Point that dimensions below are measured from. (Point should be usable by laboratory personnel, i.e., center of an anchorage bolt, door jam latch, etc.).

COORDINATES	LEFT SIDE MIRROR			INSIDE MIRROR			RIGHT SIDE MIRROR			SRP
	P1	LE1	RE1	P2	LE2	RE2	P3	LE3	RE3	
<b>X</b>		1336	1330		1322	1325		1344	1378	
<b>Y</b>		-447	-383		-367	-302		-337	-282	
<b>Z</b>		829	829		828	828		830	830	
<b>Mirror Mfr., Model And Part No.</b>	Visiocrp/Magna/Gentex 4F1.857.409.AA...			Visiocrp/Gentex 4F0.857.511.AA...			Visiocrp/Magna/Gentex 4f1.857.410.AA...			
<b>SRP Travel and Eye-ellipse</b>										

Reference Point – Driver's Side Front Door Striker Bolt Top: (X=1442.05, Y=-799.376, Z=366.772)



**DATA SHEET NO. 2**  
**MOUNTING AND TILTING ADEQUACY TEST**

Vehicle Information			
Year:	2009	Make	Audi
Model:	A6	Body Style	4-Door Sedan
NHTSA No:	C95800	VIN	WAUCH74F29N022298
Test Date:	07/13/09	Temperature:	70°F

MIRROR MOUNTING PROVIDES A STABLE SUPPORT	PASS	FAIL	CONDITIONAL
INSIDE REARVIEW MIRROR	X		
DRIVER SIDE OUTSIDE MIRROR	X		
PASSENGER SIDE OUTSIDE MIRROR	X		

OUTSIDE MIRRORS FREE OF SHARP POINTS OR EDGES	PASS	FAIL
DRIVER SIDE OUTSIDE MIRROR	X	
PASSENGER SIDE OUTSIDE MIRROR	X	

MIRROR IS ADJUSTABLE VERTICALLY & HORIZONTALLY	PASS	FAIL	CONDITIONAL
INSIDE REARVIEW MIRROR	X		
DRIVER SIDE OUTSIDE MIRROR	X		
PASSENGER SIDE OUTSIDE MIRROR	X		

DRIVER'S OUTSIDE MIRROR ADJUSTABLE FROM THE DRIVER'S SEATED POSITION	PASS	FAIL
DRIVER SIDE OUTSIDE MIRROR	X	

MIRROR ADJUSTMENT ANGLE	V+	V-	H+	H-
INSIDE REARVIEW MIRROR	14.5°	-22.2°	20°	-20°
DRIVER SIDE OUTSIDE MIRROR	12.3°	-5.4°	-8°	-21°
PASSENGER SIDE OUTSIDE MIRROR	12.6°	-7.5°	25°	18°

THIS SECTION IS RESERVED FOR MPVs, TRUCKS AND BUSES, OTHER THAN SCHOOL BUSES, NOT CONFORMING TO PASSENGER CAR REQUIREMENTS

MIRROR PROVIDES A VIEW TO THE REAR ALONG BOTH SIDES OF THE VEHICLE	PASS	FAIL	CONDITIONAL
DRIVER SIDE OUTSIDE MIRROR	N/A		
PASSENGER SIDE OUTSIDE MIRROR	N/A		

TEST STATUS:	PASSED —	X	FAILED —	
--------------	----------	---	----------	--

RECORDED BY: JONATHAN WILLIAMS DATE: 07/22/09

APPROVED BY: MICHAEL L. DUNLAP DATE: 07/22/09

**DATA SHEET NO. 3**  
**FIELD OF VIEW TEST - INSIDE REARVIEW MIRROR**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Audi
<b>Model:</b>	A6	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95800	<b>VIN</b>	WAUCH74F29N022298
<b>Test Date:</b>	07/13/09	<b>Temperature:</b>	80°F

- E Distance from center of mirror to projected eye point location = 592.0 mm
- A Distance from rear of vehicle to projected eye point location = 3485.0 mm
- X1 Distance from rear of vehicle to field of view grid = 8191.0 mm
- Z1 Vertical distance to lowest point of field of view at distance X1 = 464.0 mm
- Z2 Height of center of mirror = 1227.0 mm
- X2 Distance from rear of vehicle where the road surface is first visible  
 $X2 = [(Z2 \times X1) + (Z1 \times A)] / (Z2 - Z1) =$   
(S111 REQUIREMENT = 61m maximum) 15291 mm (15.3 m)

EYE LOCATION	MONOCULAR DATA (ALR & ARL ARE ANGLES)			
	YL (mm)	YR (mm)	ALR (°)	ARL (°)
LEFT EYE POINT	YLL = 1938	YRL = 2723		13.1°
RIGHT EYE POINT	YLR = 2643	YRR = 2250	12.8°	

CALCULATED HORIZONTAL AMBINOCULAR VIEW ANGLE (AB)

ANGLE AB = ANGLE ALR + ANGLE ARL

$ALR = \tan^{-1} [YLR / (X1 + A)]$        $ARL = \tan^{-1} [YRL / (X1 + A)]$


ANGLE AB = 25.9° (S111 REQUIREMENT = 20 degrees minimum)

REMARKS: Passed, has a passenger side mirror

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

DATA SHEET NO. 3... (Continued)

INSIDE REARVIEW MIRROR FIELD OF VIEW  
TEST GRID AND MARKER SETUP

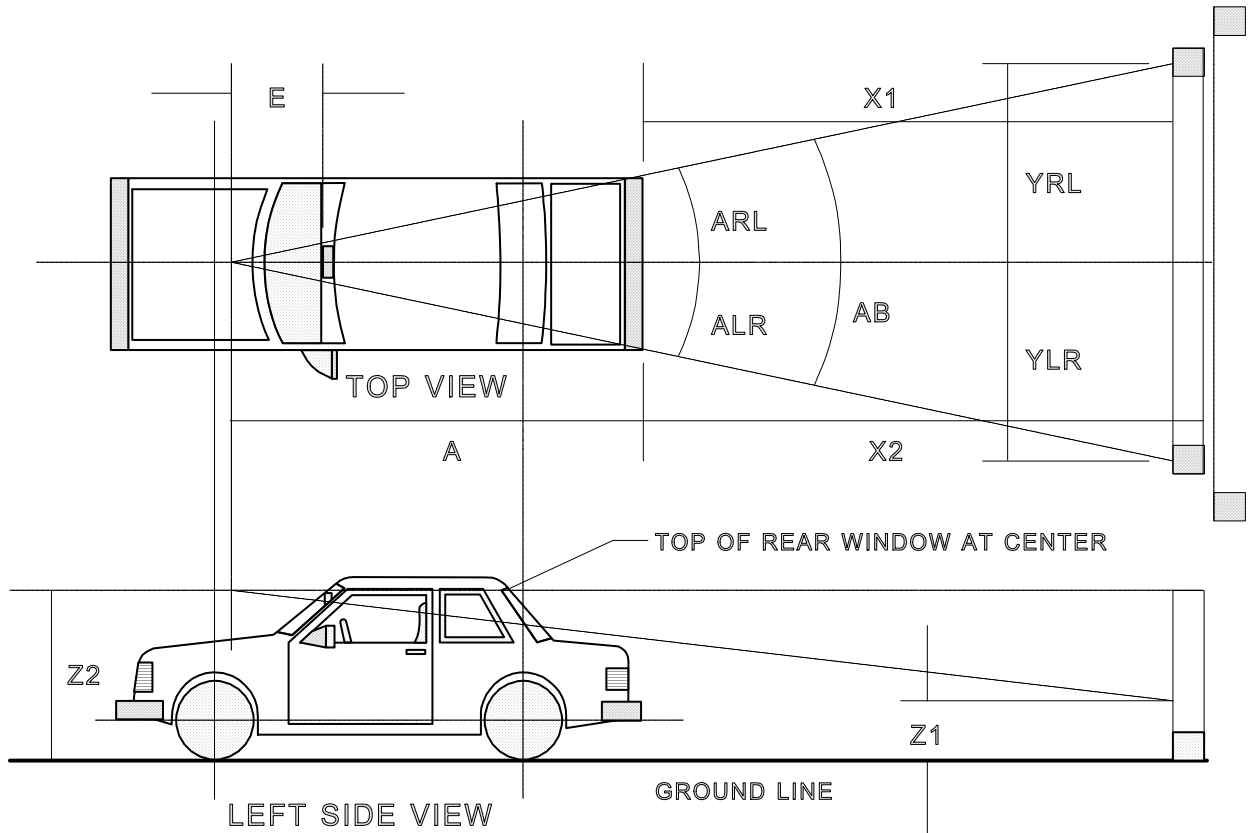



**DATA SHEET NO. 3... (Continued)**

DRIVER SIDE MIRROR (S5.2)

MIRROR OBSCURED BY UNWIPED PORTION OF WINDSHIELD YES \_\_\_\_\_ NO  X

HEIGHT OF TARGET DISC ON MIRROR  1183 mm

DISTANCE OF TARGET DISC ON MIRROR FROM VEHICLE TANGENT PLANE  10 mm

TARGET DISC LOCATION RELATIVE TO VEHICLE TANGENT PLANE  INBOARD   
(Inboard or Outboard)

ENTIRE TRIANGULAR TEST TARGET AREA ON SCREEN VISIBLE YES  X  NO \_\_\_\_\_

MIRROR PROTRUDES BEYOND VEHICLE TANGENT PLANE YES  X  NO \_\_\_\_\_

PROTRUSION REQUIRED TO MEET FIELD OF VIEW REQUIREMENT YES  X  NO \_\_\_\_\_

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

PASSENGER SIDE MIRROR (S5.3 or MFG. OPTION)

PASSENGER SIDE MIRROR TYPE (convex or unit magnification)  CONVEX

REMARKS:


**VEHICLE ATTITUDE AND GROUND LEVEL WERE RAISED 4" (101.6) TO PERFORM THE TEST.**

RECORDED BY:  JONATHAN WILLIAMS  DATE:  07/22/09


APPROVED BY:  MICHAEL L. DUNLAP  DATE:  07/22/09

DATA SHEET NO. 3... (Continued)

REQUIRED FIELD OF VIEW AS SEEN IN DRIVER'S SIDE OUTSIDE MIRROR

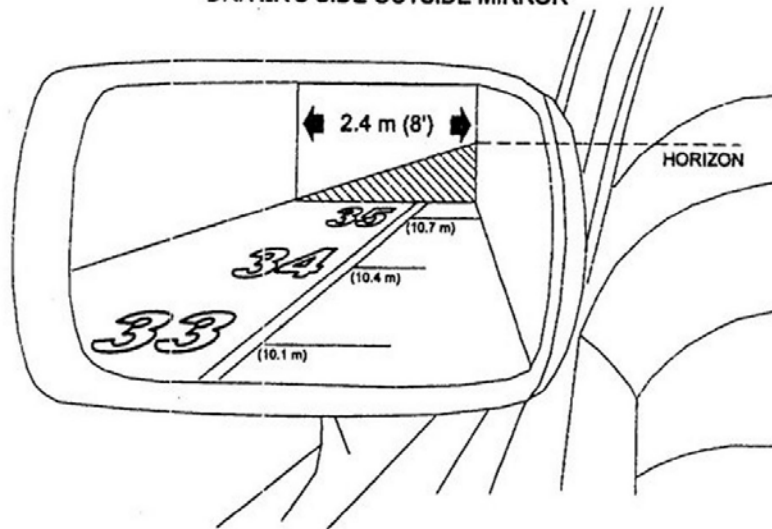


DRIVER SIDE OUTSIDE MIRROR FIELD OF VIEW TEST SETUP

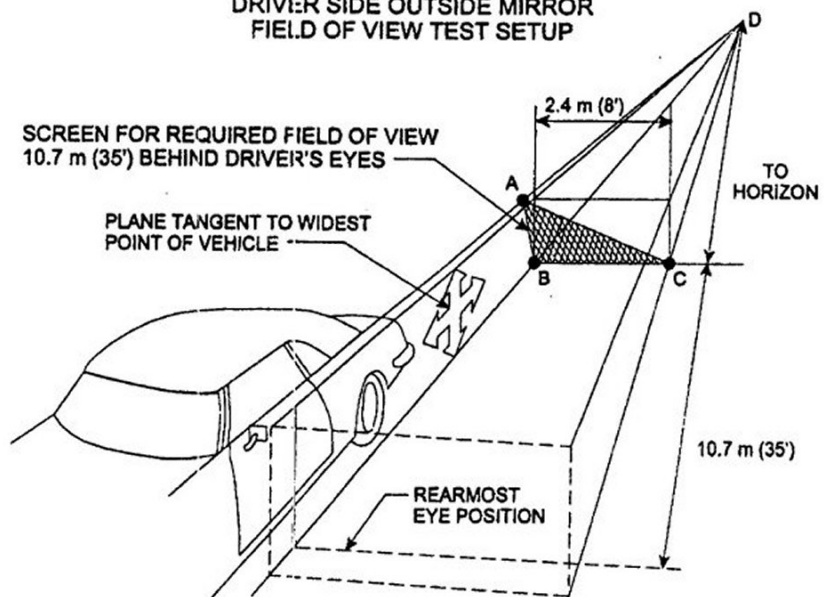


**DATA SHEET NO. 3... (Continued)**

**DRIVER SIDE OUTSIDE MIRROR TARGET DISC LOCATION WITH X AND H DIMENSIONS**

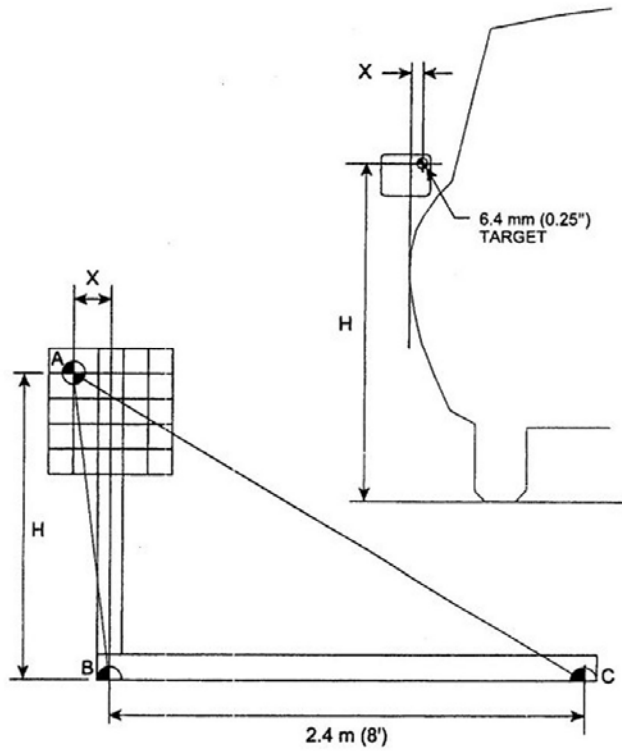

**DRIVER SIDE OUTSIDE MIRROR REQUIRED FIELD OF VIEW TRIANGLE**

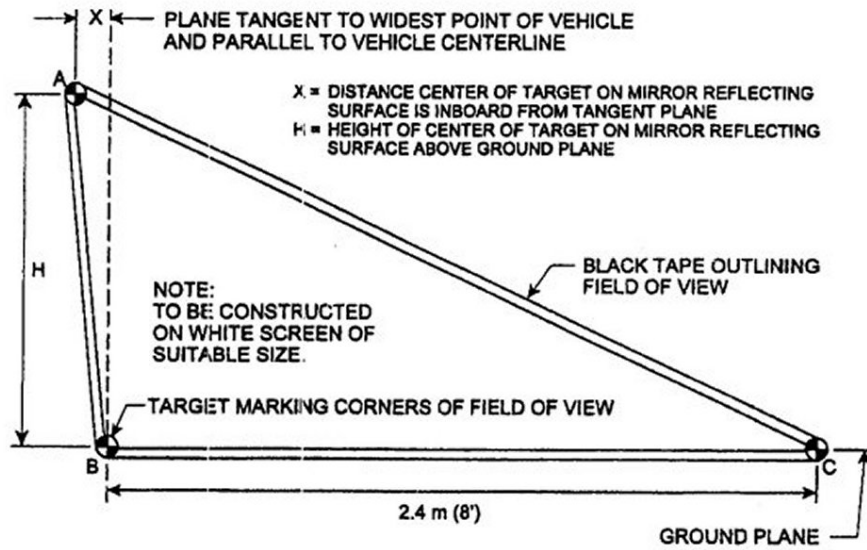

**DATA SHEET NO. 4  
REFLECTANCE TEST**

Vehicle Information			
Year:	2009	Make	Audi
Model:	A6	Body Style	4-Door Sedan
NHTSA No:	C95800	VIN	WAUCH74F29N022298
Test Date:	07/16/09	Temperature:	74°F

DESCRIPTION OF TEST APPARATUS: THE APPARATUS CONSISTS OF AN INCANDESCENT TUNGSTEN FILAMENT LAMP OPERATING AT A NOMINAL COLOR TEMPERATURE OF 2,856 K, COLLIMATING OPTICS, A SAMPLE HOLDER POSITIONED AT 25°, A SILICON PHOTOCCELL, AND A FLUKE 45 DUAL DISPLAY MULTIMETER (CALIBRATION DUE DATE 5-08-10). REFLECTANCE TESTS ARE CONDUCTED IN A 4'X6' WOODEN CABINET PAINTED FLAT BLACK. FOR CONVEX MIRROR A 6" INTEGRATING SPHERE WAS INCORPORATED INTO THE RECEIVER.

MIRROR DESCRIPTION: **INTERIOR DAY/NIGHT REARVIEW MIRROR**

VOLTAGE READING FROM CALIBRATION (Average Value): 275 mV

VOLTAGE READING FROM LIGHT REFLECTED BY DAY MIRROR (Average Value): 256.4 mV

REFLECTOMETER VOLTAGE READINGS		
	DAY MIRROR	NIGHT MIRROR
TEST NO. 1	256 mV	243 mV
TEST NO. 2	257 mV	243 mV
TEST NO. 3	257 mV	243 mV
TEST NO. 4	256 mV	243 mV
TEST NO. 5	256 mV	243 mV

REFLECTANCE (Day) = Voltage (Refl)/Voltage (Cal) = 0.932 x 100 = 93.2 percent  
(Min. Required = 35%)

VOLTAGE READING FROM CALIBRATION (Average Value) = 275 mV

VOLTAGE READING FROM LIGHT REFLECTED BY NIGHT MIRROR (Average Value): 243mV

REFLECTANCE (Night) = Voltage (Refl)/Voltage (Cal) = 0.884 x 100 = 88.4 percent  
(Min. Required = 4%)

NOTE: If meter reading directly in percent is used, record only percent

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

**DATA SHEET NO. 4... (Continued)**

MIRROR DESCRIPTION: **DRIVER SIDE OUTSIDE MIRROR.**

VOLTAGE READING FROM CALIBRATION (Average Value): 275 mV

VOLTAGE READING FROM LIGHT REFLECTED BY DAY MIRROR (Average Value): 255 mV

REFLECTOMETER VOLTAGE READINGS		
	DAY MIRROR	NIGHT MIRROR
TEST NO. 1	255 mV	242 mV
TEST NO. 2	255 mV	243 mV
TEST NO. 3	255 mV	243 mV
TEST NO. 4	255 mV	242 mV
TEST NO. 5	255 mV	243 mV

REFLECTANCE (Day) = Voltage (Refl)/Voltage (Cal) = 0.927 x 100 = 92.7 percent  
(Min. Required = 35%)

VOLTAGE READING FROM CALIBRATION (Average Value) = 275 mV

VOLTAGE READING FROM LIGHT REFLECTED BY NIGHT MIRROR (Average Value): 242.6mV

REFLECTANCE (Night) = Voltage (Refl)/Voltage (Cal) = 0.882 x 100 = 88.2 percent  
(Min. Required = 4%)

NOTE: If meter reading directly in percent is used, record only percent

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

**DATA SHEET NO. 4... (Continued)**

MIRROR DESCRIPTION: **PASSENGER SIDE OUTSIDE MIRROR.**

VOLTAGE READING FROM CALIBRATION (Average Value): 332 mV

VOLTAGE READING FROM LIGHT REFLECTED BY DAY MIRROR (Average Value): 331 mV

REFLECTOMETER VOLTAGE READINGS		
	DAY MIRROR	NIGHT MIRROR
TEST NO. 1	331 mV	321 mV
TEST NO. 2	331 mV	322 mV
TEST NO. 3	331 mV	321 mV
TEST NO. 4	331 mV	321 mV
TEST NO. 5	331 mV	321 mV

REFLECTANCE (Day) = Voltage (Refl)/Voltage (Cal) = 0. 997 x 100 = 99.7 percent

REFERANCE MIRROR VALUE 93.4 X 99.7 (reflectance value) = 93.1%  
(Min. Required = 35%)

VOLTAGE READING FROM LIGHT REFLECTED BY DAY MIRROR (Average Value): 321.2 mV

REFLECTANCE (Night) = Voltage (Refl)/Voltage (Cal) = 0. 967 x 100 = 96.7 percent

REFERANCE MIRROR VALUE 93.4 X 96.7 (reflectance value) = 90.3%  
(Min. Required = 4%)

NOTE: If meter reading directly in percent is used, record only percent

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

RECORDED BY: JONATHAN WILLIAMS DATE: 07/22/09

APPROVED BY: MICHAEL L. DUNLAP DATE: 07/22/09

**DATA SHEET NO. 5**  
**BREAKAWAY TEST - INSIDE REARVIEW MIRROR**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Audi
<b>Model:</b>	A6	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95800	<b>VIN</b>	WAUCH74F29N022298
<b>Test Date:</b>	07/17/09	<b>Temperature:</b>	82°F

**MOUNTING OF MIRROR (INSIDE) DESCRIPTION: TAB GLUED TO WINDSHIELD. MIRROR BASE SLIPS OVER BASE AND HELD IN PLACE WITH SPRING CLIP.**

(Requirement: the mirror shall deflect, collapse or break away when it is subjected to a force of 400 N or less)

TEST NO.	LOAD DIRECTION VERTICAL/HORIZONTAL	MAXIMUM FORCE (N)	DISPLACEMENT (MM)	PASS	FAIL
1	0-90 DEGREES	123.9	6.7	X	
2	+45/90 DEGREES	373.2	15.4	X	
3	-45/90 DEGREES	315.9	4.5	X	
4	-45/+45 DEGREES	88.8	13.3	X	
5	+45/+45 DEGREES	189.4	44.9	X	
6	+45/-45 DEGREES	148.1	32.6	X	
7	-45/-45 DEGREES	28.7	9.9	X	

REMARKS:

**DATA SHEET NO. 5... (Continued)**

**BREAKAWAY TEST - INSIDE REARVIEW MIRROR FAILURE TYPE – DESCRIPTION:**

FAILURE TYPE – DESCRIPTION:

**NONE**

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

REMARKS:

RECORDED BY: **JONATHAN WILLIAMS**

DATE: **07/22/09**

APPROVED BY: **MICHAEL L. DUNLAP**

DATE: **07/22/09**



**DATA SHEET NO. 6**  
**UNIT MAGNIFICATION AND CONVEX MIRROR TESTS**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Audi
<b>Model:</b>	A6	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95800	<b>VIN</b>	WAUCH74F29N022298
<b>Test Date:</b>	07/15/09	<b>Temperature:</b>	72°F

**DRIVER'S SIDE & INSIDE REARVIEW MIRRORS:**

DRIVER SIDE MIRROR	
TEST POSITION	DIAL READINGS
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0
10	0

INSIDE MIRROR	
TEST POSITION	DIAL READINGS
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0
10	0

All dial indicator readings for unit magnification mirrors must be zero.

**DATA SHEET NO. 6... (Continued)**  
**UNIT MAGNIFICATION AND CONVEX MIRROR TESTS**

PASSENGER SIDE REARVIEW MIRROR:

CONVERSION TABLE FROM SPHEROMETER DIAL  
 READING TO RADIUS OF CURVATURE

TEST POSITION	DIAL READINGS (inches) Passenger	RADIUS OF CURVATURE (mm)	DEVIATION BETWEEN THE AVERAGE RADIUS OF CURVATURE AND THE TEST POSITION RADIUS OF CURVATURE (mm)	PERCENT DEVIATION FROM THE AVERAGE RADIUS OF CURVATURE
1	0.0052	1374.2	25.2	1.8
2	0.0053	1348.8	0.2	0.01
3	0.0053	1348.8	0.2	0.01
4	0.0053	1348.8	0.2	0.01
5	0.0052	1374.2	25.2	1.8
6	0.0054	1323.4	25.6	1.9
7	0.0055	1299.5	49.5	3.7
8	0.0054	1323.4	25.6	1.9
9	0.0051	1400.1	51.1	3.8
10	0.0053	1348.8	0.2	0.01
Average Radius of Curvature		1349	Greatest Percent Deviation	3.8

REMARKS:

**DATA SHEET NO. 6... (Continued)**  
**UNIT MAGNIFICATION AND CONVEX MIRROR TESTS**

PASSENGER'S SIDE REARVIEW MIRROR

IF CONVEX, ARE THERE ANY DISCONTINUITIES IN THE SLOPE OF THE MIRROR SURFACE YES \_\_\_\_\_ NO X

IF CONVEX, ARE THE WORDS, "**OBJECTS IN THE MIRROR ARE CLOSER THAN THEY APPEAR**" PRESENT YES X NO \_\_\_\_\_

IF CONVEX, MEASURE LETTER HEIGHT OF WORDS \_\_\_\_\_ 5.0 mm

IF CONVEX, LETTERS ARE NOT < 4.8 mm OR > 6.4 mm HIGH YES X NO \_\_\_\_\_

IF CONVEX, RADIUS OF CURVATURE NOT < 889 mm OR > 1651 mm YES X NO \_\_\_\_\_

IF CONVEX, THE GREATEST PERCENT DEVIATION FROM AVERAGE RADIUS OF CURVATURE IS  $\pm 12.5\%$  YES X NO \_\_\_\_\_

IF UNIT MAGNIFICATION, ALL DIAL READINGS ARE ZERO  $\pm 0$ . YES X NO \_\_\_\_\_

NOTE: PASSENGER MIRROR NOT REQUIRED

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

RECORDED BY: JONATHAN WILLIAMS DATE: 07/22/09

APPROVED BY: MICHAEL L. DUNLAP DATE: 07/22/09



**DATA SHEET NO. 8**  
**TEST SUMMARY-FMVSS 111-REARVIEW MIRRORS**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Audi
<b>Model:</b>	A6	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95800	<b>VIN</b>	WAUCH74F29N022298
<b>Test Date:</b>	07/22/09	<b>Temperature:</b>	N/A

PASSENGER VEHICLE TESTING:

OUTSIDE DRIVER SIDE MIRROR	PASS	FAIL	COMMENTS
STABLE SUPPORT	X		
DOES NOT PROTRUDE BEYOND VEHICLE BODY	X		
NOT OBSCURED BY UNWIPED PORTION OF WINDSHIELD	X		
ADJUSTABLE BY TILTING	X		
ADJUSTABLE FROM DRIVER SEAT	X		
FREE OF SHARP EDGES	X		
FIELD-OF-VIEW	X		
REFLECTANCE	X		
UNIT MAGNIFICATION	X		

INSIDE REARVIEW MIRROR	PASS	FAIL	COMMENTS
STABLE SUPPORT	X		
ADJUSTABLE BY TILTING	X		
FIELD-OF-VIEW	X		
REFLECTANCE	X		
BREAK AWAY	X		
UNIT MAGNIFICATION	X		

OUTSIDE PASSENGER MIRROR	PASS	FAIL	COMMENTS
STABLE SUPPORT	X		
ADJUSTABLE BY TILTING	X		
FREE OF SHARP EDGES	X		
UNIT OR CONVEX			Convex
LABELING	X		
REFLECTANCE	X		

APPENDIX A  
PHOTOGRAPHS



2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 1: LEFT FRONT  $\frac{3}{4}$  VIEW





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 2: LEFT SIDE VIEW





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 3: RIGHT REAR ¾ VIEW





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 4: RIGHT SIDE VIEW



MFD. BY AUDI AG 11 08

GVWR LBS 4993 GAWR LBS FRONT 2623/REAR 2590

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S.  
FEDERAL MOTOR VEHICLE SAFETY, BUMPER AND THEFT  
PREVENTION STANDARDS IN EFFECT ON THE DATE OF  
MANUFACTURE SHOWN ABOVE



**Audi**

4632247



PASSENGER CAR  
WAUCH74F29N022298  
GERMANY

2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 5: MANUFACTURER'S LABEL





**TIRE AND LOADING INFORMATION**  
**RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT**

SEATING CAPACITY TOTAL **5** FRONT AVANT **2** REAR ARRIERE **3**  
 NOMBRE DE PLACES TOTAL **5** AVANT **2** ARRIERE **3**

4F0 010  
502 KF

The combined weight of occupants and cargo should never exceed **500** kg or **1102** lbs.  
 Le poids total des occupants et du chargement ne doit jamais dépasser **500** kg ou **1102** lb.

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS A FROID
FRONT AVANT	245/40 R18 97H	270 KPA, 39 PSI
REAR ARRIERE	245/40 R18 97H	270 KPA, 39 PSI
SPARE DE SECOURS	245/40 R18 97H	270 KPA, 39 PSI

**SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION**  
**VOIR LE MANUEL DU PROPRIETAIRE POUR PLUS DE RENSEIGNEMENTS**

A-6

111-KAR-09-005

2009 AUDI A6  
 NHTSA NO. C95800  
 FMVSS NO. 111

FIGURE 6:TIRE PLACARD





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 7: DRIVER SIDE REARVIEW MIRROR AND MOUNTING





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 8: PASSENGER SIDE REARVIEW MIRROR AND MOUNTING



2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 9: INSIDE REARVIEW MIRROR AND MOUNTING





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 10:TEST SET-UP





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 11:CAMERA SET-UP FOR PHOTOGRAPHING REFERENCE BOARD





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 12: OVERALL SET-UP AND INSTRUMENTATION FOR MIRROR BREAK- AWAY TEST






2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 13:CLOSE-UP OF MIRROR BREAK- AWAY TEST

A-14

111-KAR-09-005

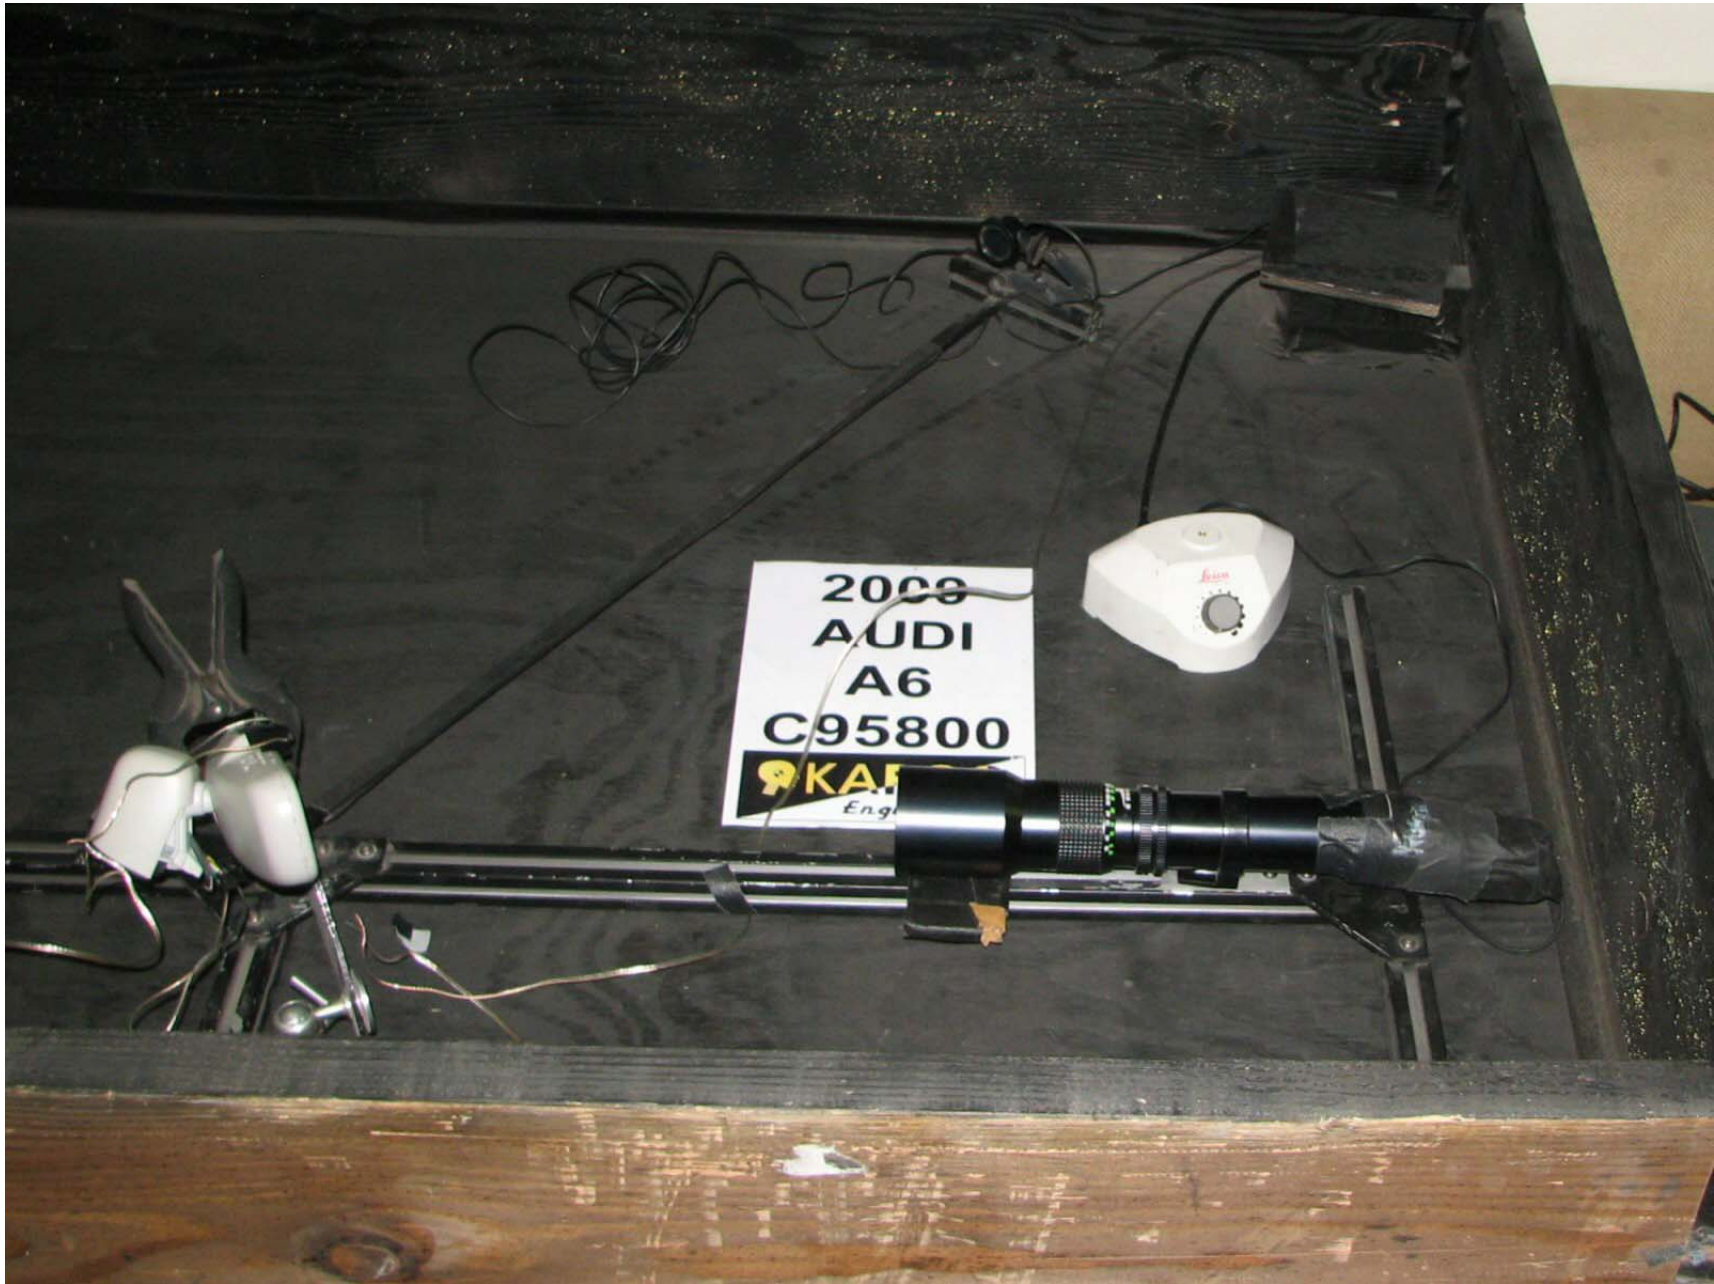

2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 14: REFLECTION TEST SET-UP





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111


FIGURE 15: MIRROR SET-UP FOR AREA MEASUREMENT



2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111


FIGURE 16:LEFT EYE FIELD OF VIEW TEST (INSIDE MIRROR)



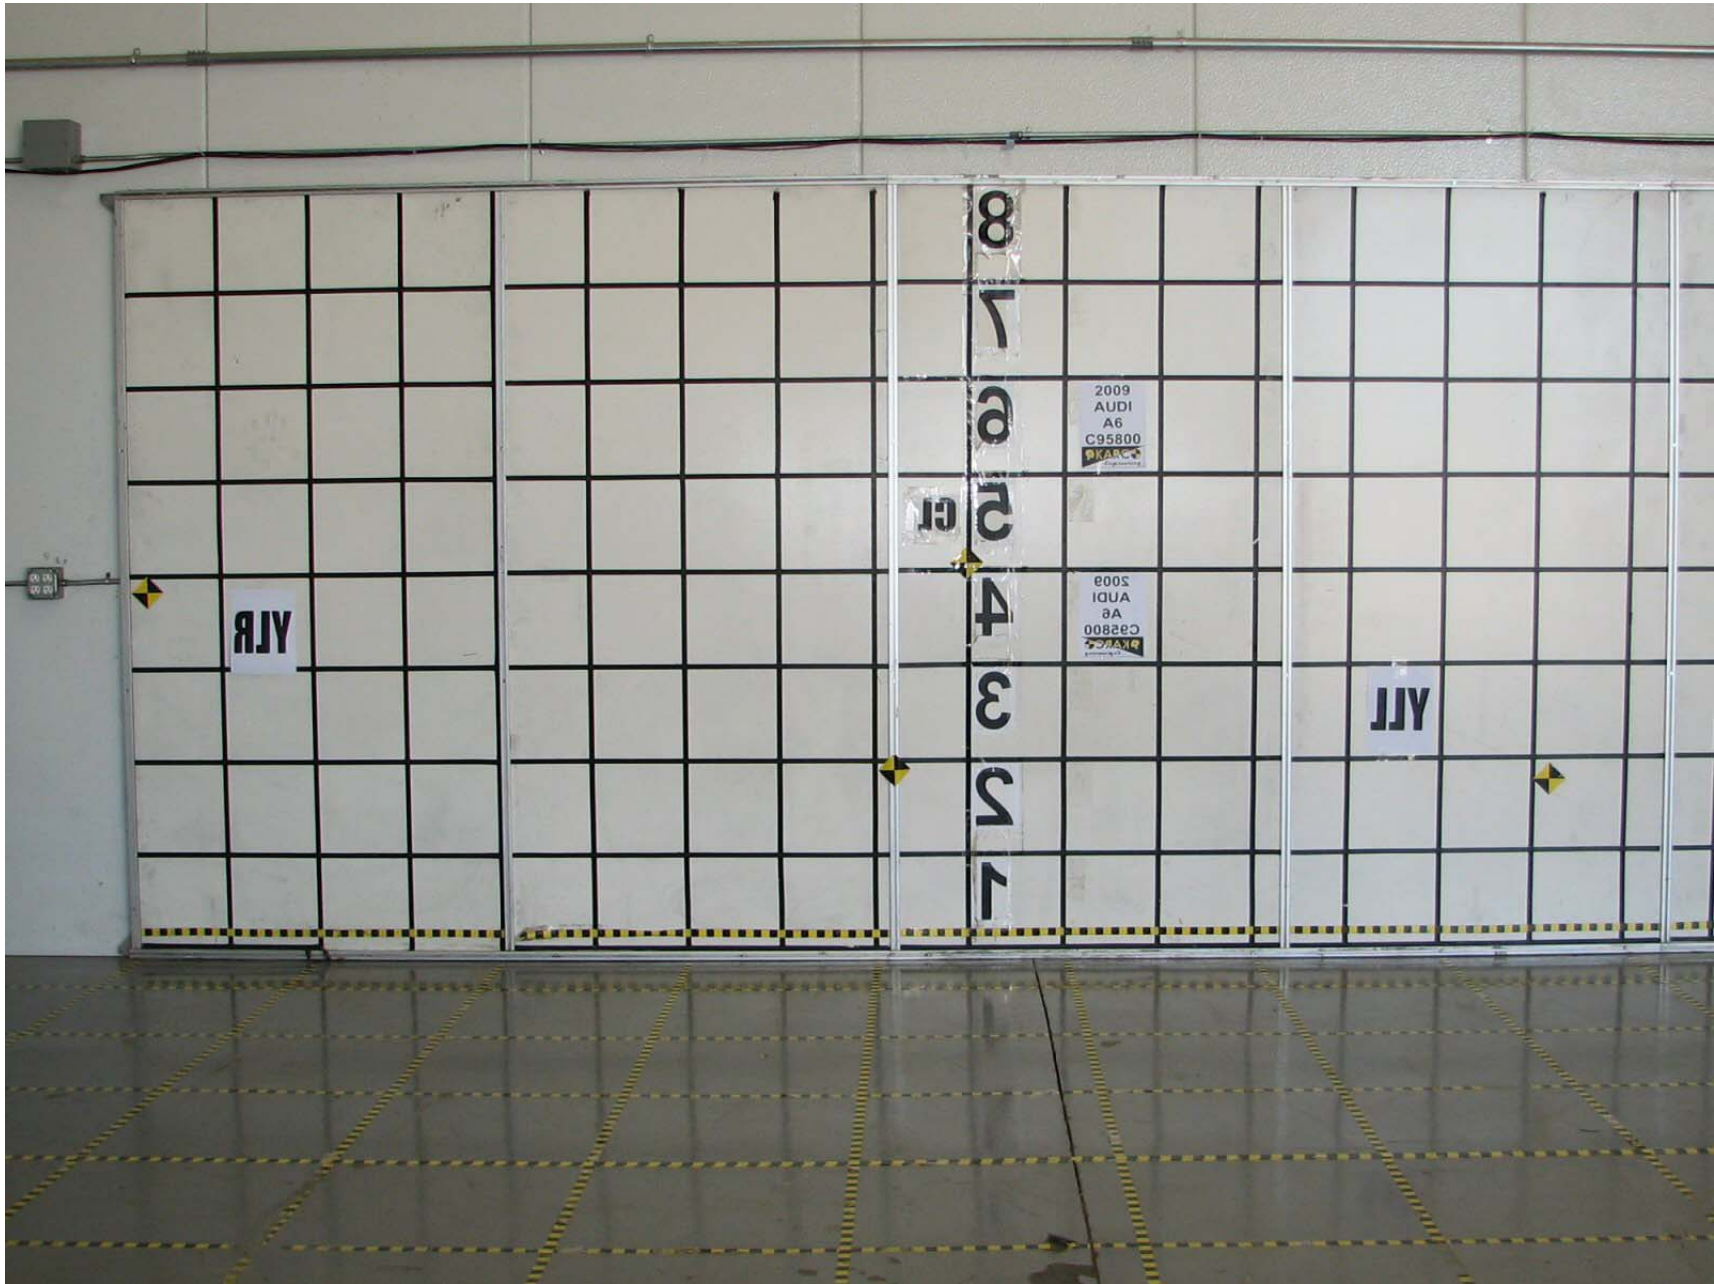

2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 17:REFERENCE BOARD FOR INSIDE MIRROR, LEFT EYE

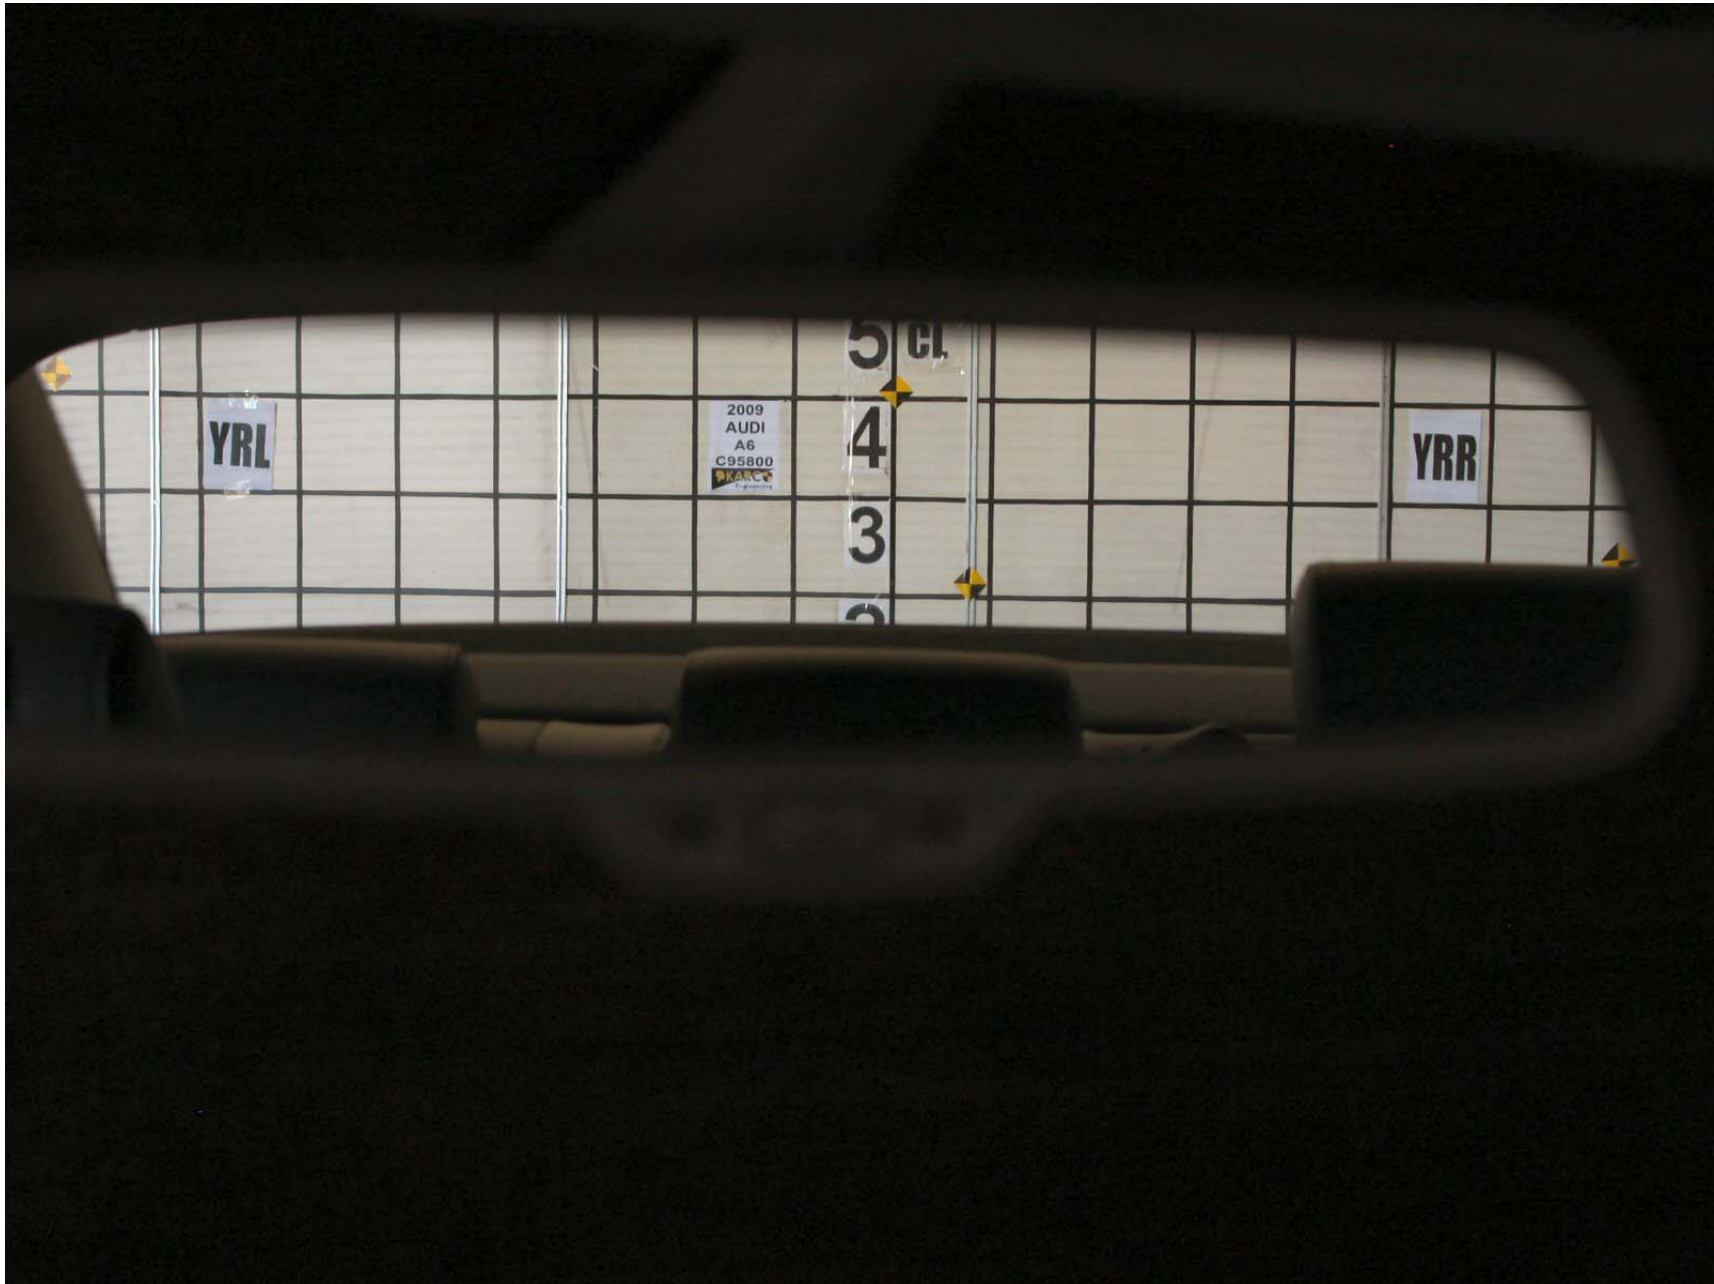

2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 18:RIGHT EYE FIELD OF VIEW TEST (INSIDE MIRROR)





2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 19:REFERENCE BOARD FOR INSIDE MIRROR, RIGHT EYE



2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 20:LEFT EYE FIELD OF VIEW TEST (DRIVER SIDE MIRROR)



2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 21:RIGHT EYE FIELD OF VIEW TEST (DRIVER SIDE MIRROR)







2009 AUDI A6  
NHTSA NO. C95800  
FMVSS NO. 111

FIGURE 22:REFERENCE BOARD FOR DRIVER SIDE MIRROR

APPENDIX B  
DATA PLOTS

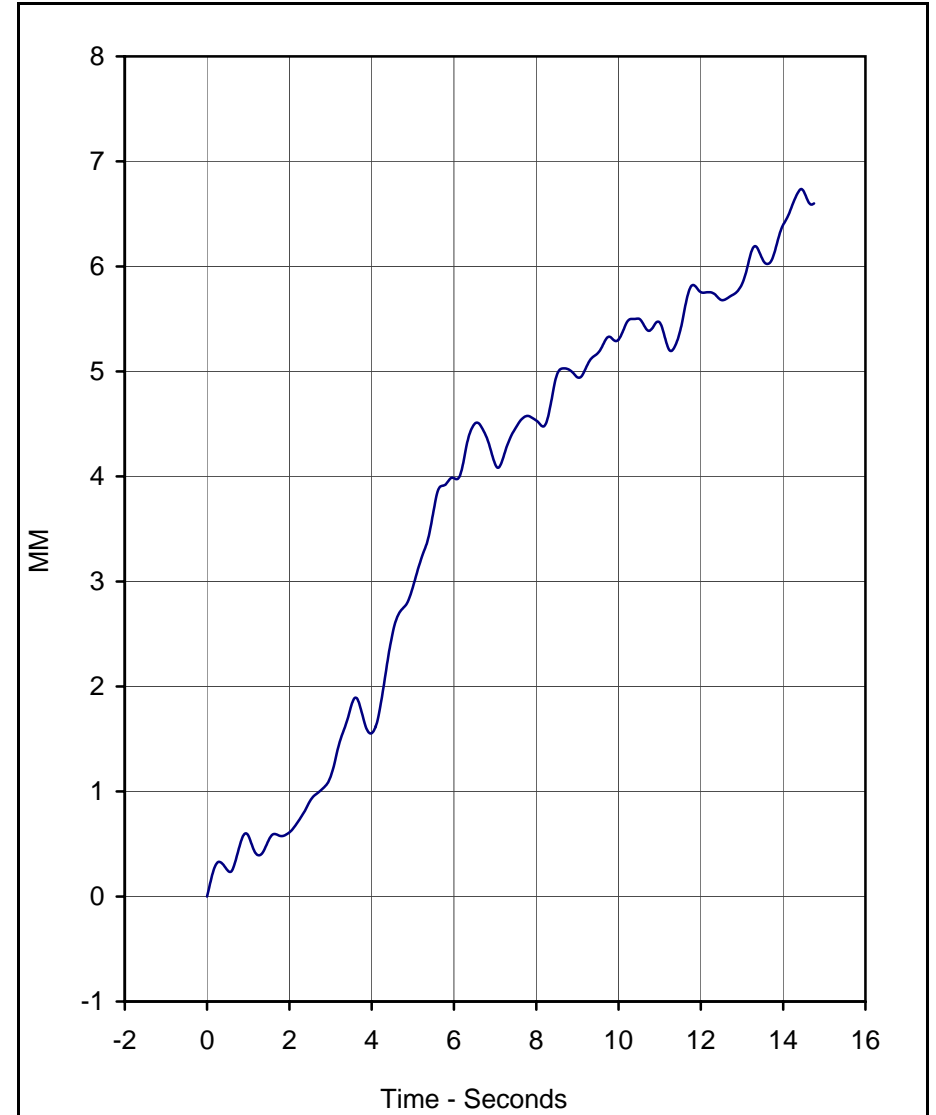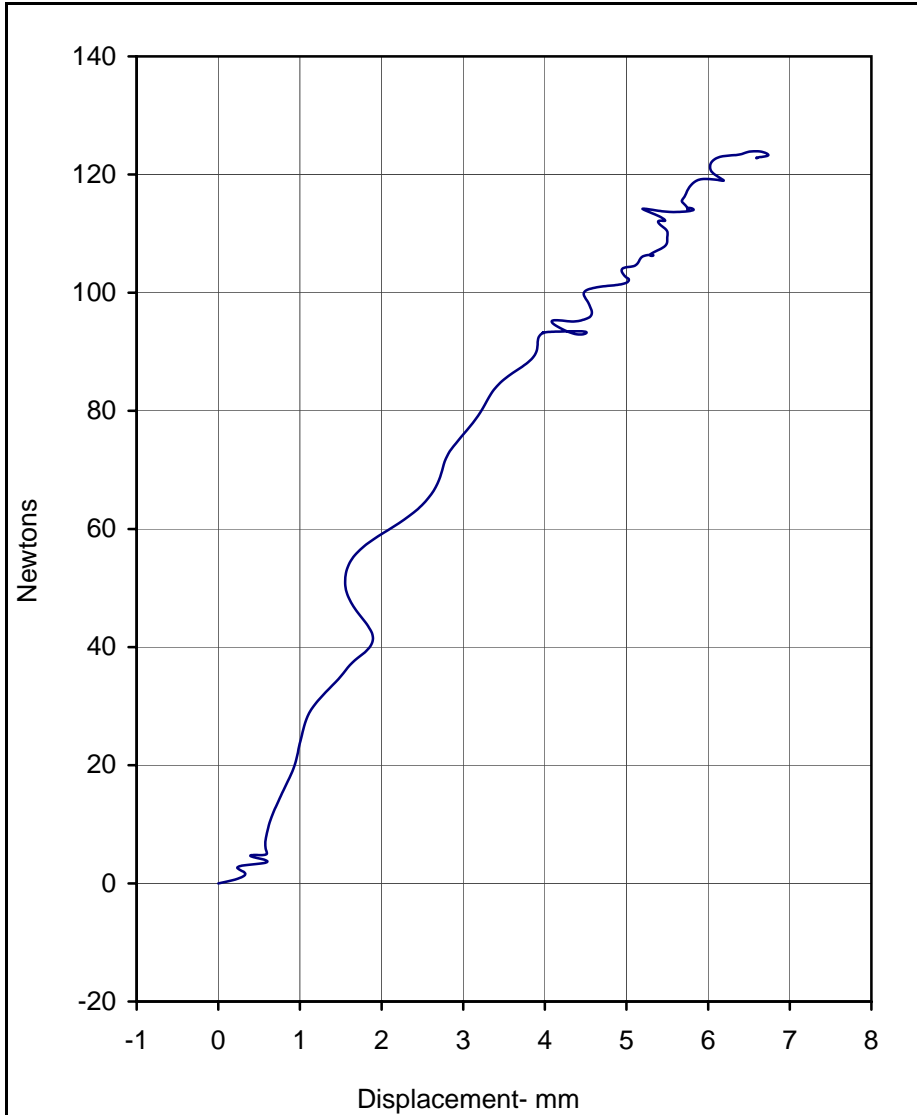

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL



Units	Peak Force	Displacement	Filter (Hz)
Newtons	123.9	6.6	1

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	6.7	14.5	27.5	1

Test Program: 2009 FMVSS 111 Rearview Mirrors Test No.: 1  
 Test Vehicle: 2009 Audi A6 4-Door Sedan No.: C95800

Load Direction: 0 / 90  
 Test Date: 7/17/09



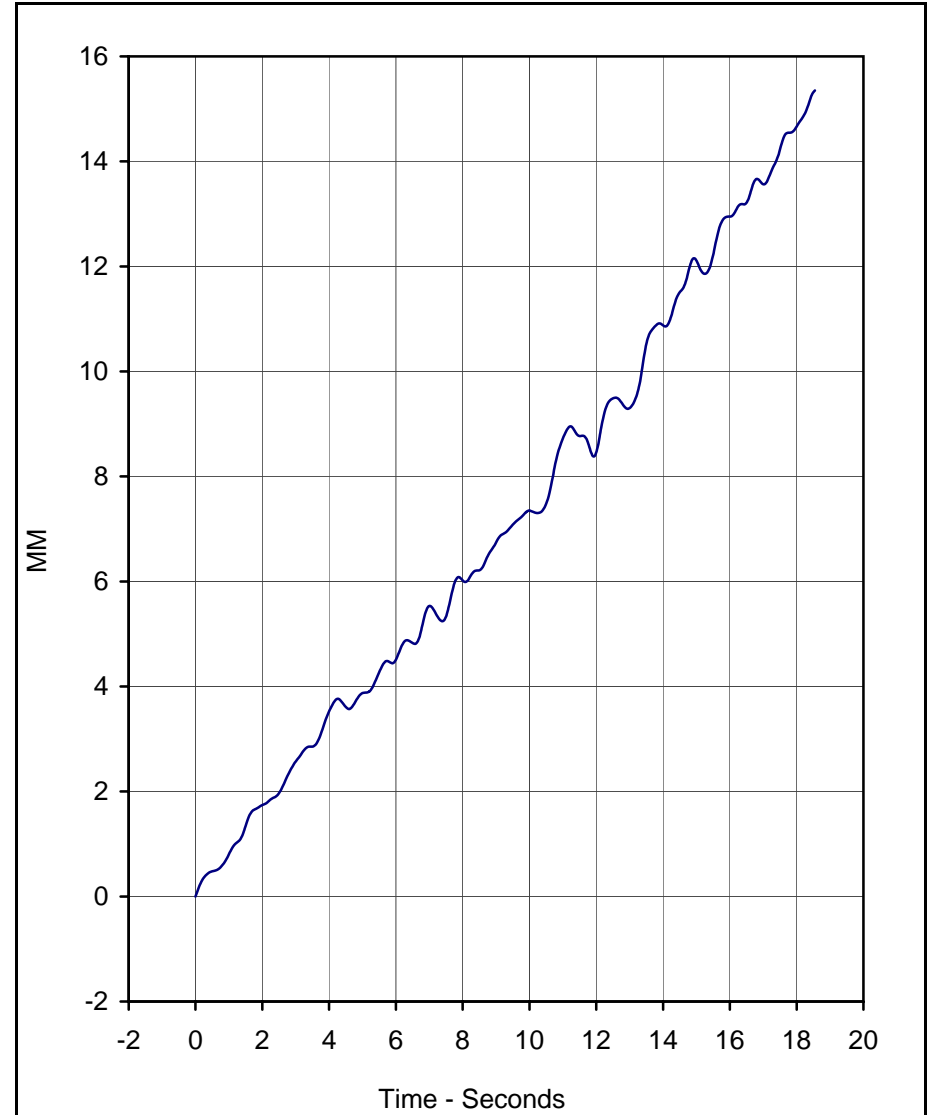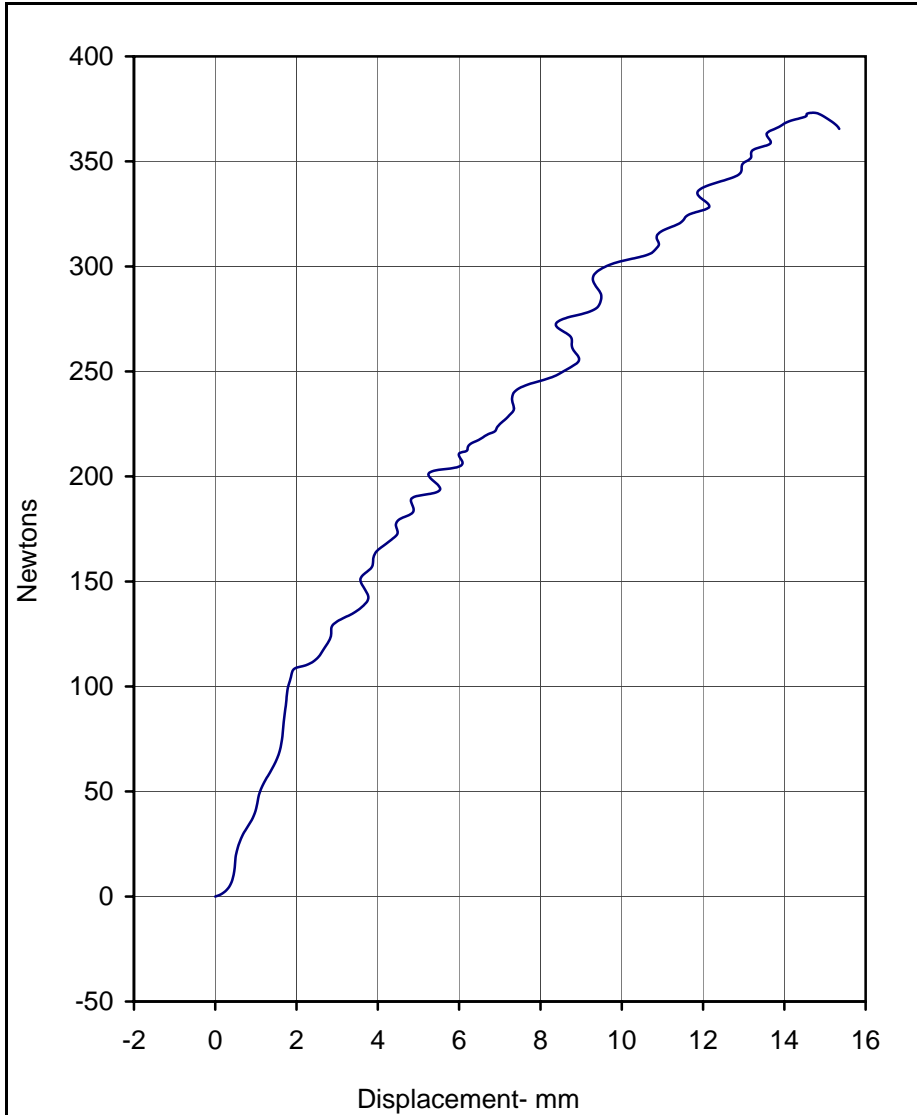

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL



Units	Peak Force	Displacement	Filter (Hz)
Newtons	373.2	14.7	1

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	15.4	18.6	48.4	1

Test Program: 2009 FMVSS 111 Rearview Mirrors Test No.: 2  
 Test Vehicle: 2009 Audi A6 4-Door Sedan No.: C95800

Load Direction: +45 / 90  
 Test Date: 7/17/09



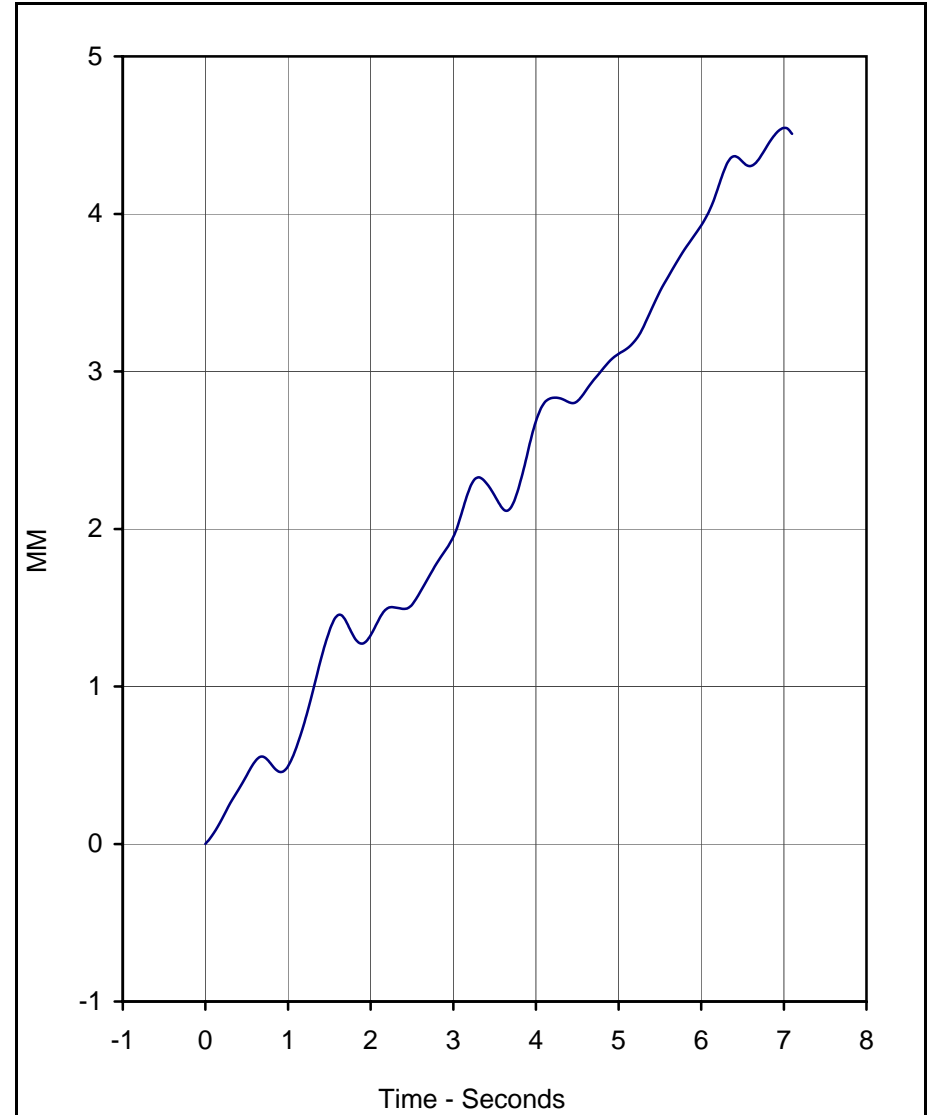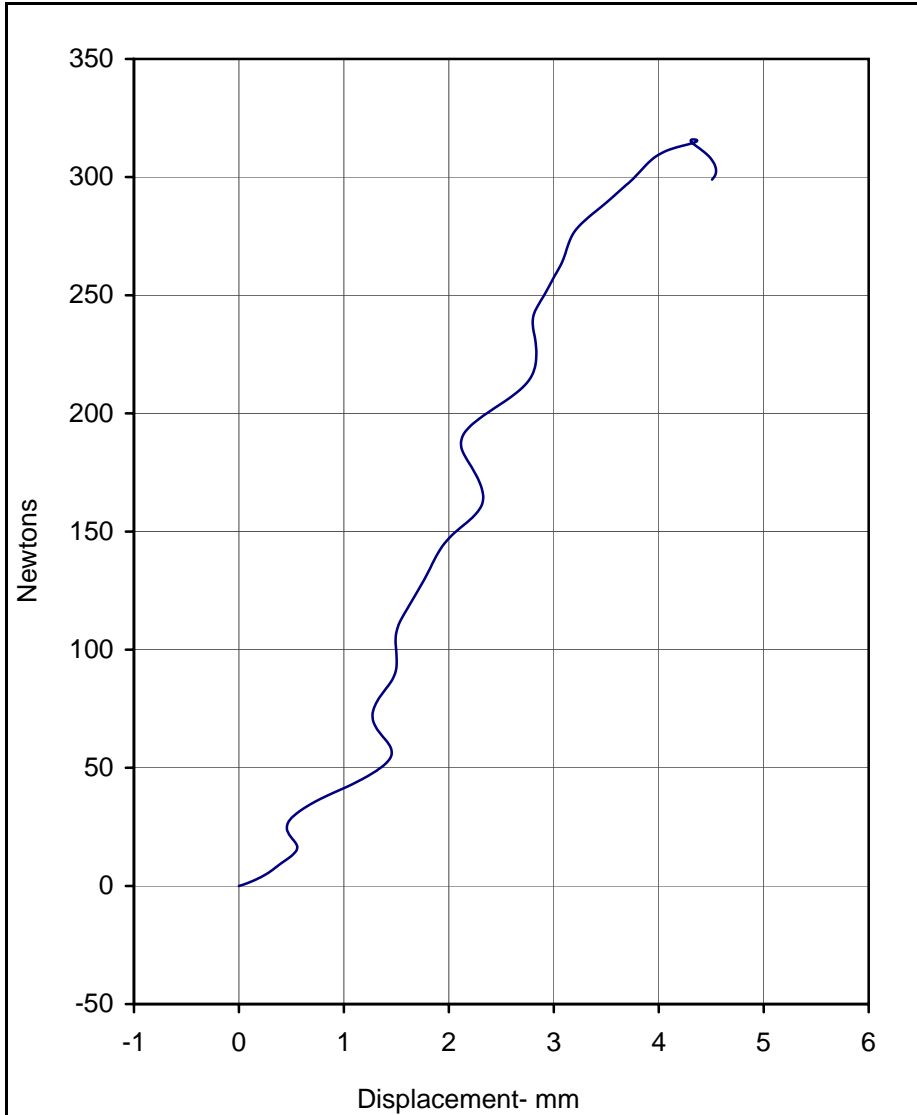

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	315.9	4.3	1



Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	4.5	7.0	39.7	1

Test Program: 2009 FMVSS 111 Rearview Mirrors Test No.: 3  
 Test Vehicle: 2009 Audi A6 4-Door Sedan No.: C95800

Load Direction: -45 / 90  
 Test Date: 7/17/09





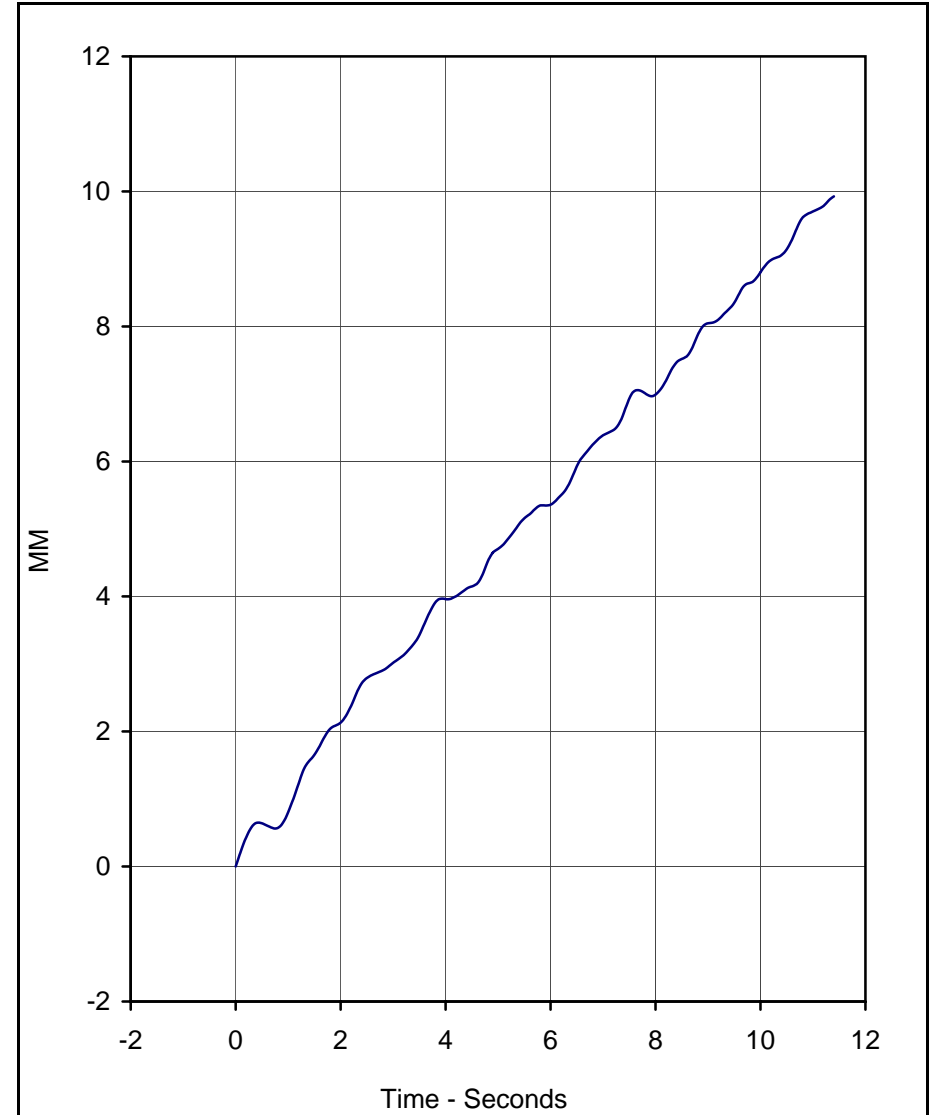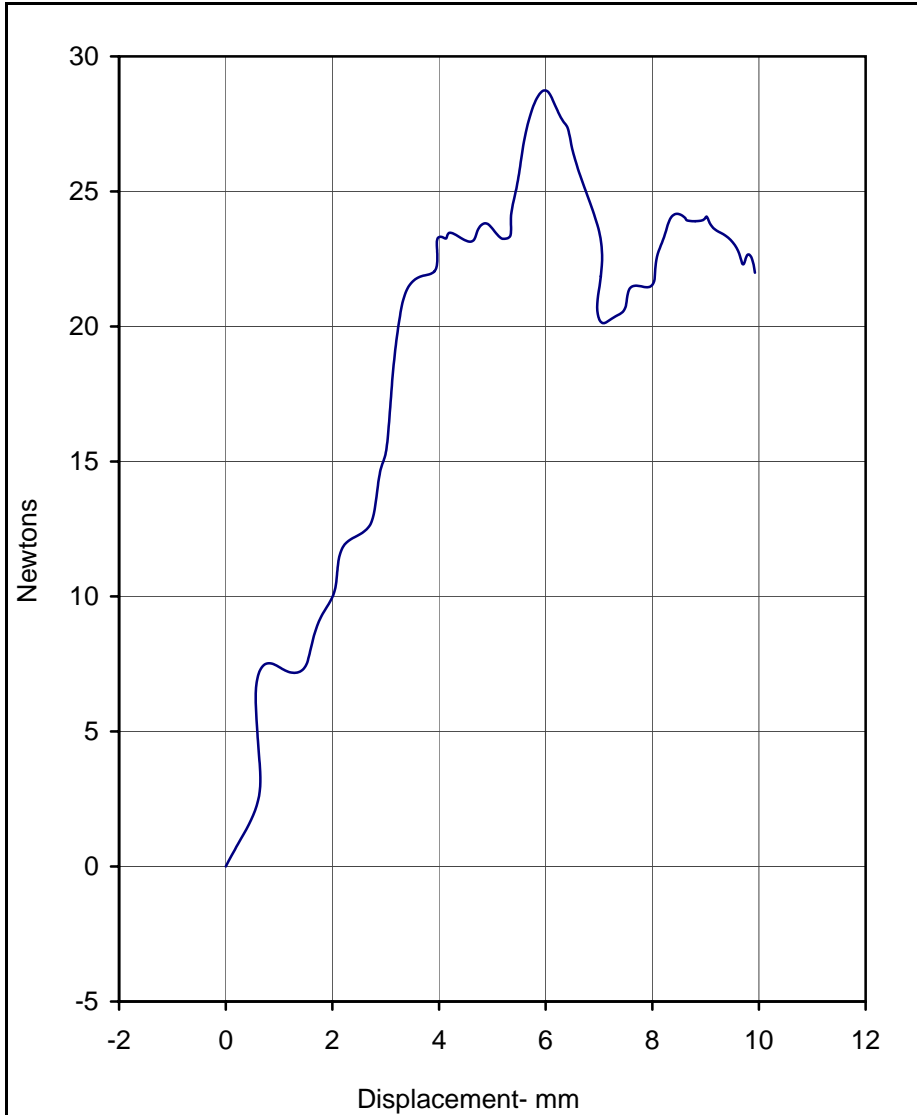

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL


Units	Peak Force	Displacement	Filter (Hz)
Newtons	28.7	6.0	1

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	9.9	11.4	53.9	1

Test Program: 2009 FMVSS 111 Rearview Mirrors Test No.: 4  
 Test Vehicle: 2009 Audi A6 4-Door Sedan No.: C95800


Load Direction: -45 / +45  
 Test Date: 7/17/09



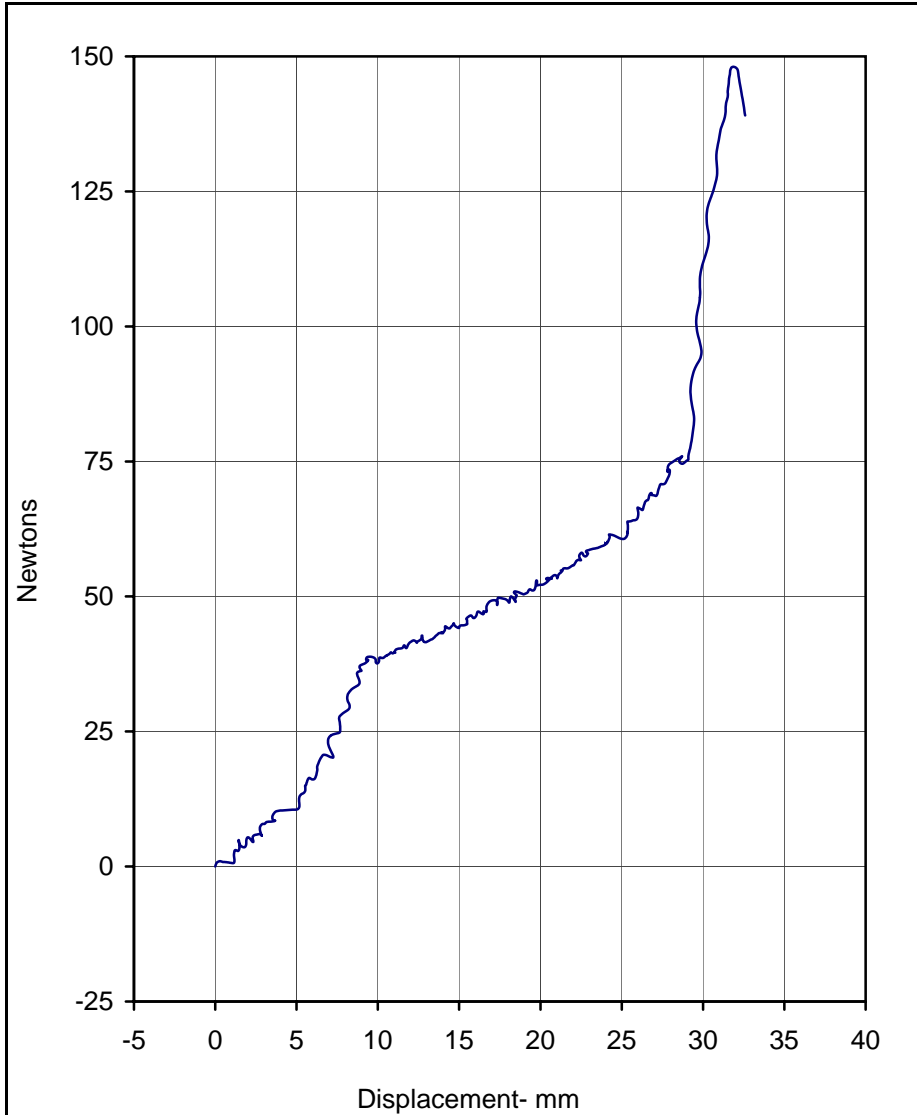

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	148.1	31.9	1

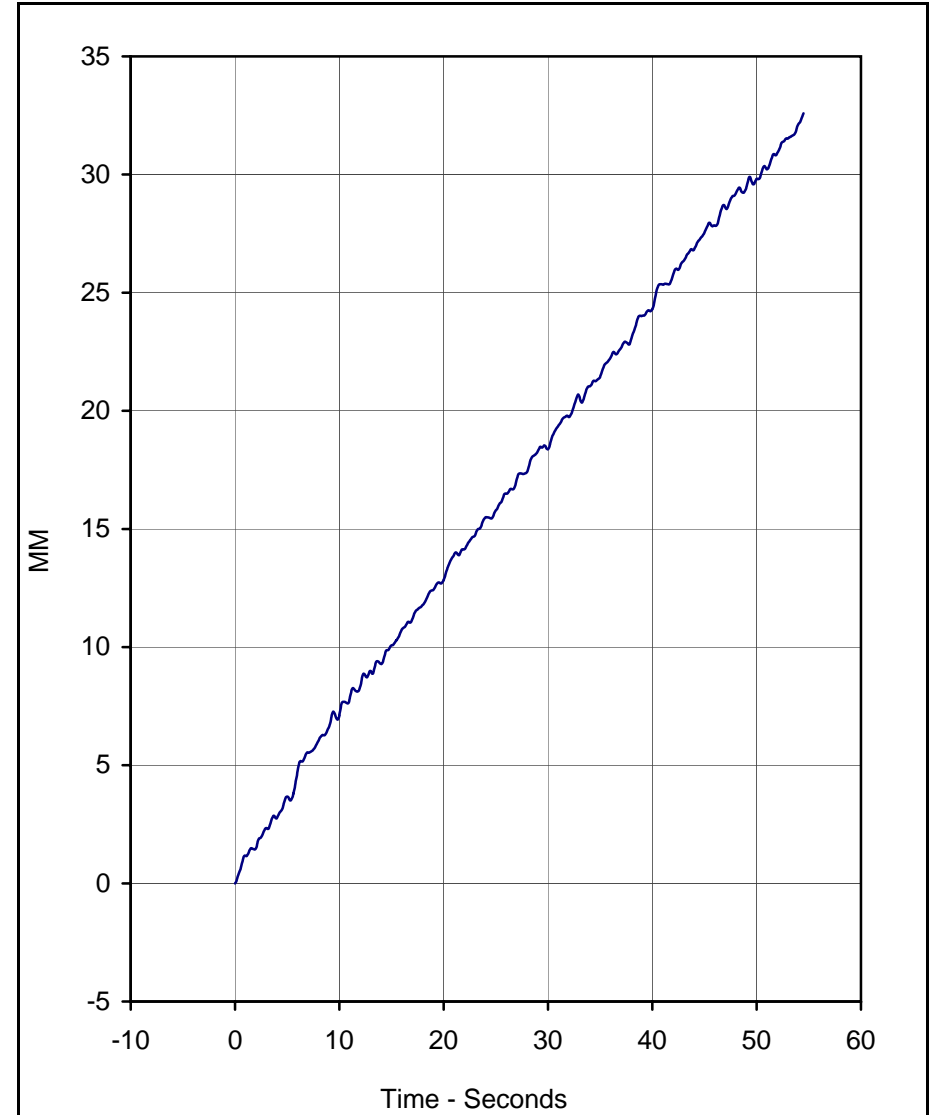



Curve Description	CURNO	Type
Displacement vs. Time	002	FIL

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	32.6	54.5	35.7	1

Test Program: 2009 FMVSS 111 Rearview Mirrors Test No.: 5  
 Test Vehicle: 2009 Audi A6 4-Door Sedan No.: C95800

Load Direction: +45 / +45  
 Test Date: 7/17/09



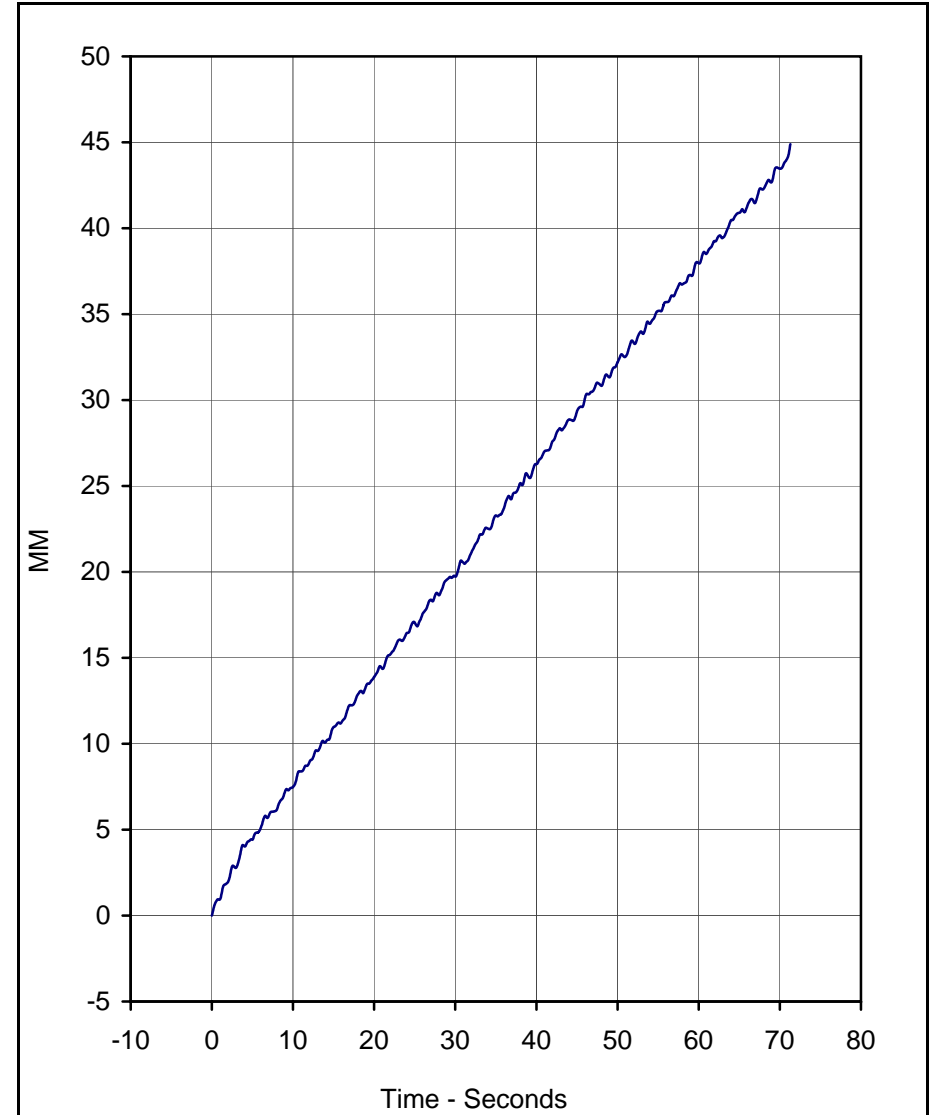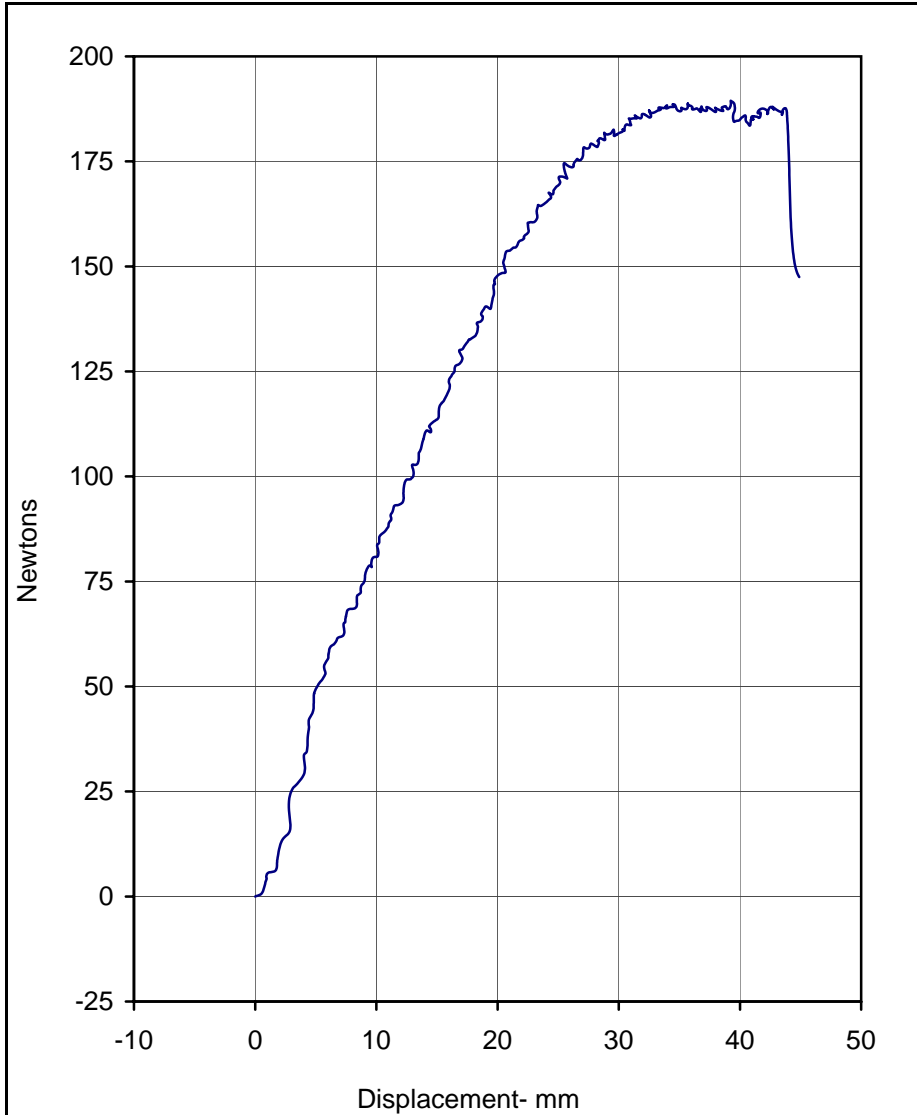

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL


Units	Peak Force	Displacement	Filter (Hz)
Newtons	189.4	39.2	1

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	44.9	71.3	37.3	1

Test Program: 2009 FMVSS 111 Rearview Mirrors Test No.: 6  
 Test Vehicle: 2009 Audi A6 4-Door Sedan No.: C95800


Load Direction: +45 / -45  
 Test Date: 7/17/09



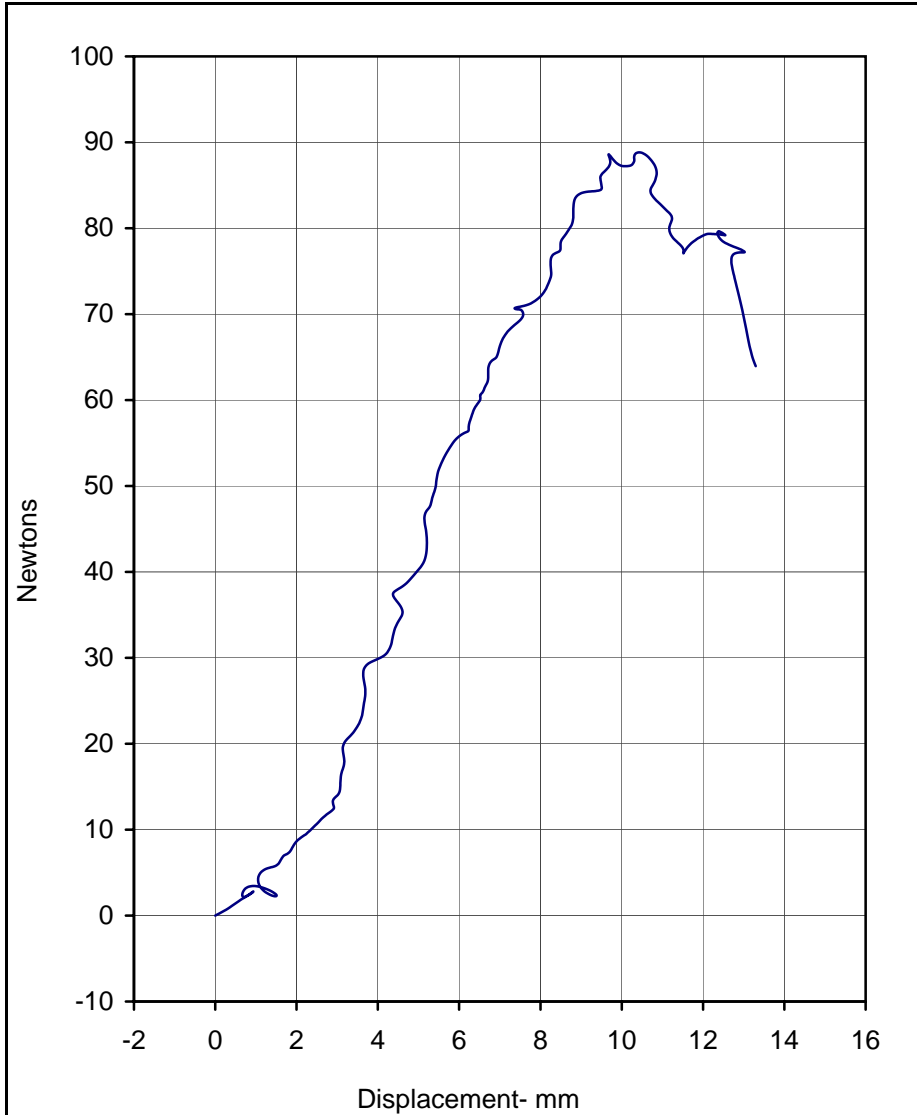

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	88.8	10.4	1

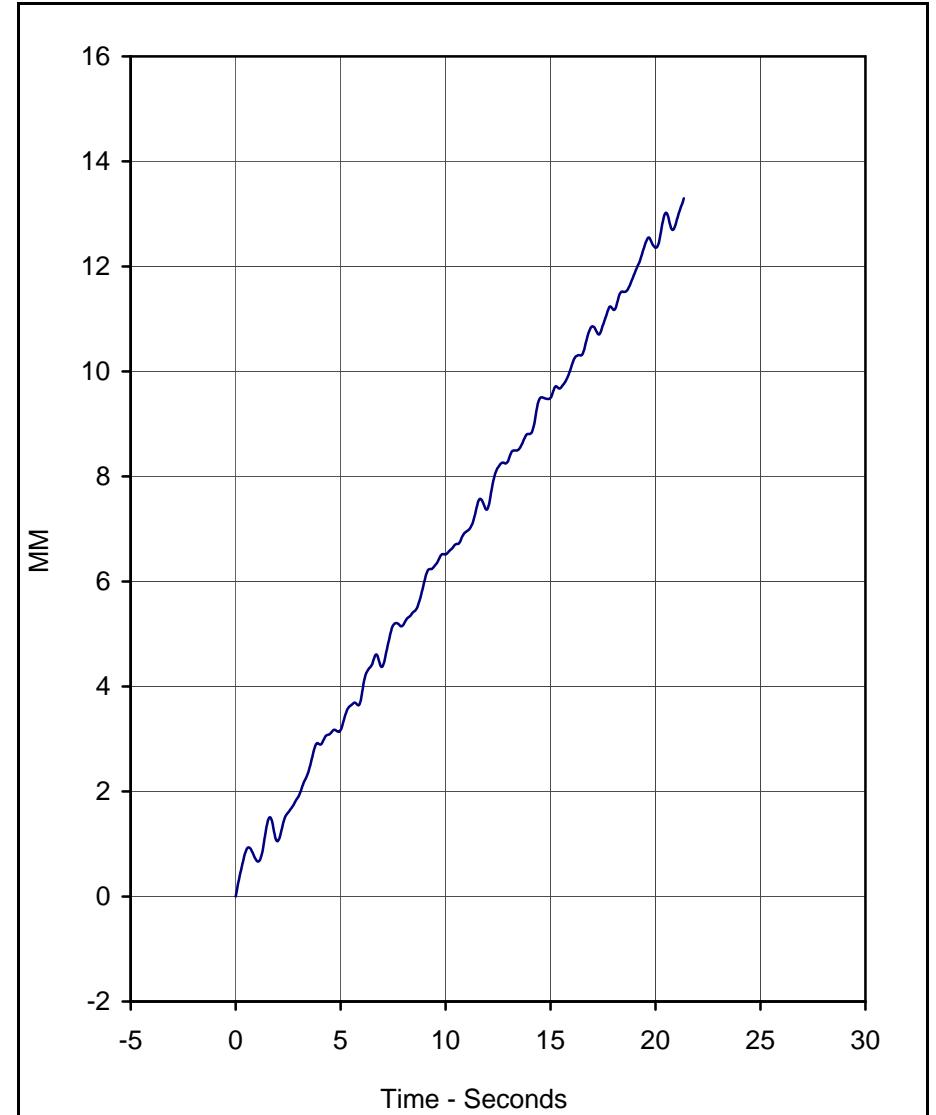

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	13.3	21.4	37.7	1

Test Program: 2009 FMVSS 111 Rearview Mirrors Test No.: 7  
 Test Vehicle: 2009 Audi A6 4-Door Sedan No.: C95800

Load Direction: -45 / -45  
 Test Date: 7/17/09



APPENDIX C

TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

**2009 FMVSS 111 Rearview Mirrors  
Test Equipment List  
7/17/09  
2009 Audi A6 4-Door Sedan**

Description	Manufacturer	Model No.	Serial No.	Limit	Accuracy	Cal. Date	Due Cal.
Hydraulic Pump	Lincoln	T-3825-C	2460952	8 gpm @ 2700 psi	N/A	N/A	N/A
Computer	Panasonic	CF-71	8IMAA01852	N/A	N/A	N/A	N/A
TDAS	DTS	TDAS	DM0100	N/A	SAE J211	11/28/08	11/28/09
Load Cell	Interface	1500ASK-300	230965A	1334 N	± 1.0%	4/20/09	4/20/10
Displacement Xdcr.	Celesco	PTX101-0030	J0654652	76 CM	± 1.0%	5/5/09	5/5/10



APPENDIX D  
EYELIPSE LOCATIONS SUPPLIED BY MANUFACTURER

## VEHICLE INFORMATION / TEST SPECIFICATIONS

FMVSS No. 111

Vehicle Make/Model/Year: AUDI Sedan A6 2009

Driver's Eye Reference Points:

Coordinate System:

X = Longitudinal Dimension

Y = Lateral Dimension

Z = Vertical Dimension

Positive Values are as follows:

X = Forward of Reference Point

Y = Outboard of Reference Point (to driver's side)

Z = Above Reference Point

Provide Reference/Body Fiducial Point that dimensions below are measured from. **Point must be easily accessible and usable by test laboratory personnel, i.e. seat track mounting bolt, seat belt anchorage bolt, door latch at B pillar striker.** (Provide sketch of reference point if necessary.)

-> see attachment (C6PA Augpunkt Messung.ppt)


COORDINATES	LEFT SIDE MIRROR		INSIDE MIRROR		RIGHT SIDE MIRROR	
	LE1 (left eye)	RE1 (right eye)	LE2	RE2	LE3	RE3
X	1336	1330	1322	1325	1344	1378
Y	-447	-383	-367	-302	-337	-282
Z	829	829	828	828	830	830
Mirror Mfr., Model Part No.	Visiocorp/Magna/Gentex		Visiocorp/Gentex		Visiocorp/Magna/Gentex	
	4F1.857.409.AA ...		4F0.857.511.AA ....		4F1.857.410.AA....	



Audi C6 MY 2009





# Reference point B pillar

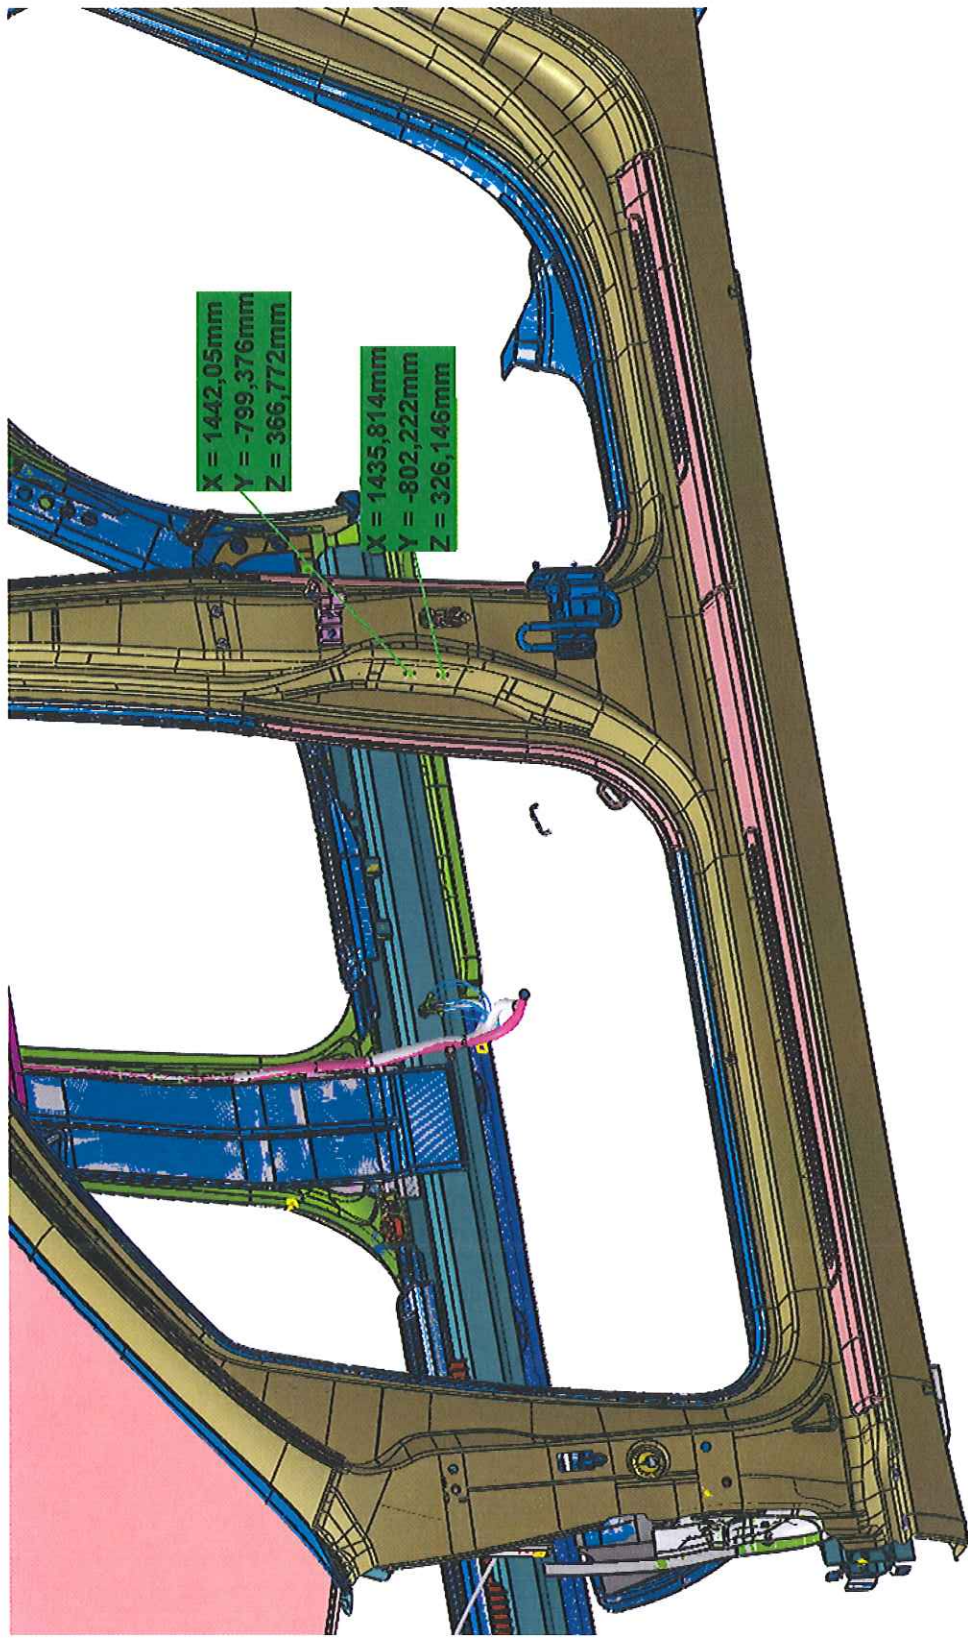


**Ansteuerung abblendbare Spiegelgläser**  
Mario Fiebag, 16.07.2009

# Outside mirror

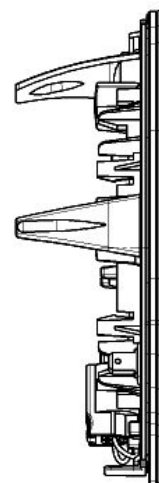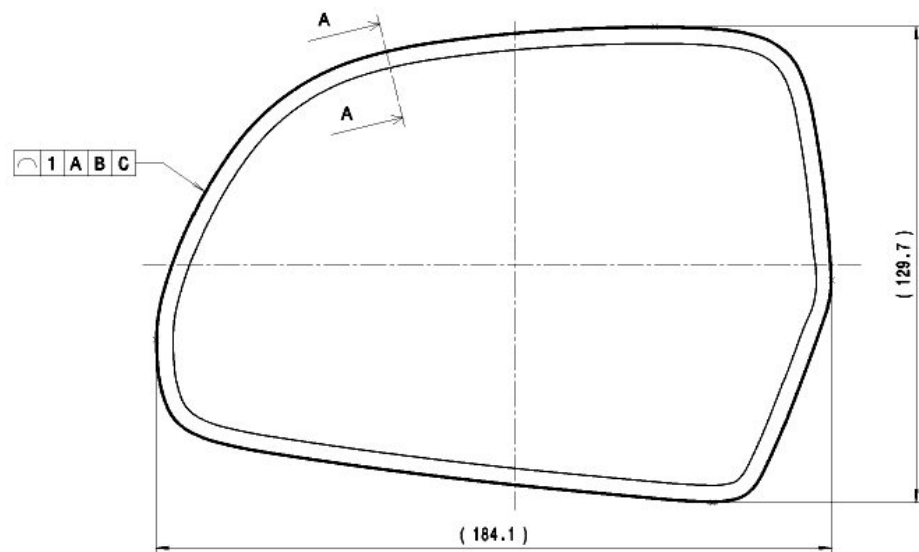

Left view Kat  
Scale: 1:1 UV-UV

Front view[2]  
Scale: 1:1

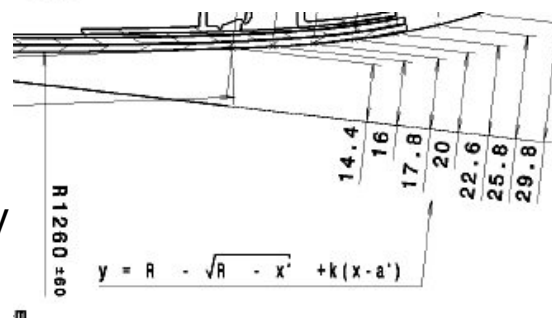

min. cell voltage: 0 V  
max. cell voltage: 1,25 V


Anforderungen: s. Lastenheft  
max. Zellspannung 1,25 V  
max cell voltage 1.25V

PIN 1: EC +

PIN 2: EC -




View K  
Scale: 2:1  
Steckergehause




2 pol. gedichteter Stecker in  
Glastraegerplatte montiert  
AUDI-Nr.: 8E0 973 202  
AMP-Nr.: 1-967644-2  
connector housing (Customer  
no. 8E0 973 202)  
contact AMP 1-967644-2

x	y
54.3	1.2
190.0	14.4
200.0	16.0
210.0	17.8
220.0	20.0
230.0	22.6
240.0	25.8

# Inside mirror

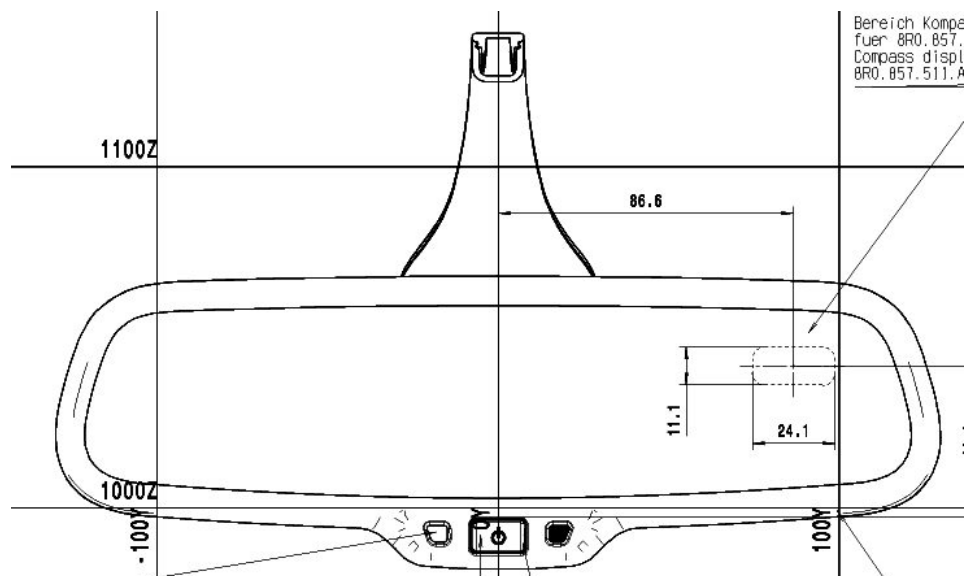


6-polige Stecker  
M 5:1



PIN	COLOR	Description	Current
1	weiss White	+12Volt IGN +12V Ignition	1500mA Max
2	schwarz Black	-Masse Ground	1500mA Max
3	grau Gray	Rueckwaertsgang Reverse Inhibit	10mA Max
4	gelb Yellow	+ Aussenspiegelansteuerung + OEC	300mA Max-per element
5	braun Brown	- Aussenspiegelansteuerung - OEC	300mA Max-per element
6	gruen Green	Innenbeleuchtung Interior Lamp Inhibit	10mA Max

Unless otherwise specified,  
Nicht bemaste Linien und Punkte  
der Zeichnung entnehmen.  
Lines and points to be taken  
from mylar (drawing)

8-polige Stecker  
Scale: 5:1



PIN	COLOR	Description	Current
1	weiss White	+12Volt IGN +12V Ignition	1500mA Max
2	schwarz Black	-Masse Ground	1500mA Max
3	grau Gray	Rueckwaertsgang Reverse Inhibit	10mA Max
4	gelb Yellow	+ Aussenspiegelansteuerung + OEC	300mA Max-per element
5	braun Brown	- Aussenspiegelansteuerung - OEC	300mA Max-per element
6	gruen Green	Innenbeleuchtung Interior Lamp Inhibit	10mA Max
7	blau Blue	LIN Signal	
8		n.c.	





**Vielen Dank.**