


REPORT NUMBER 110-STF-10-008

**SAFETY COMPLIANCE TESTING FOR
FMVSS NO. 110
TIRE SELECTION AND RIMS**

**TOYOTA MOTOR MANUFACTURING
2010 TOYOTA VENZA
FOUR-DOOR MPV
NHTSA NO. CA5105**

**U.S. DOT SAN ANGELO TEST FACILITY
131 COMANCHE TRAIL, BUILDING 3527
GOODFELLOW AFB, TEXAS 76908**



May 12, 2010

FINAL REPORT

PREPARED FOR

**U. S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
NVS-220
OFFICE OF VEHICLE SAFETY COMPLIANCE
1200 NEW JERSEY AVENUE, SE
WASHINGTON, D.C. 20590**

This publication is distributed by the National Highway Traffic Safety Administration in the interest of information exchange. Opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement.

Prepared By: Doris Beebe

Approved By: [Signature]

Accepted By: [Signature]

Acceptance Date: 5/12/10

Technical Report Documentation Page

1. Report No. 110-STF-10-008	2. Government Accession No.	3. Recipient's Catalog No.
4. Title and Subtitle Final Report of FMVSS 110 Compliance Testing of 2010 Toyota Venza Four-Door MPV, NHTSA No. CA5105	5. Report Date May 12, 2010	6. Performing Organization Code STF
	8. Performing Organization Rep# STF-DOT-10-110-008	
7. Author(s) Jack R. Stewart, Junior Systems Analyst Todd P. Groghan, Safety Compliance Engineer Kenneth H. Yates, Safety Compliance Engineer	9. Performing Organization Name and Address U.S. DOT San Angelo Test Facility 131 Comanche Trail, Building 3527 Goodfellow AFB, Texas 76908	
12. Sponsoring Agency Name and Address United States Department of Transportation National Highway Traffic Safety Administration Office of Vehicle Safety Compliance 1200 New Jersey Avenue, SE Washington, DC 20590	10. Work Unit No. (TRAVIS)	11. Contract or Grant No.
	13. Type of Report and Period Covered Final Test Report March 18 through March 29, 2010	
14. Sponsoring Agency Code NVS-220		
15. Supplementary Notes		
16. Abstract Compliance tests were conducted on the subject 2010 Toyota Venza four-door MPV in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-110T-02 for the determination of FMVSS 110 compliance. Test failures identified were as follows: None.		
17. Key Words Compliance Testing Safety Engineering FMVSS 110	18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division NPO-411, Room E12-100 1200 New Jersey Avenue, S.E. Washington, DC 20590 Email: tis@dot.gov FAX: 202-493-2833	
19. Security Classification (of this report) UNCLASSIFIED	21. No. of Pages 40	22. Price
20. Security Classification (of this page) UNCLASSIFIED		

Form DOT F 1700.7 (8-72)

TABLE OF CONTENTS

SECTION	PAGE
1 Introduction	1
2 Test Procedure and Summary of Results	2
3 Test Data	3
4 Test Equipment List and Calibration Information	19
5 Photographs	20
Figure	
5.1 ¾ Front View from Left Side of Vehicle	
5.2 ¾ Rear View from Right Side of Vehicle	
5.3 Vehicle Certification Label and Load Carrying Capacity Modification Label	
5.4 Vehicle Placard	
5.5 Tire Showing Brand	
5.6 Tire Showing Model	
5.7 Tire Showing Size, Load Index, and Speed Symbol	
5.8 Tire Showing Max Load Rating and Max Inflation Pressure	
5.9 Tire Showing Serial Number	
5.10 Rim Markings Including Letter Designation for Source of Published Dimensions, DOT Symbol, Manufacturer, Rim Size, and Manufacture Date	
5.11 Rim Contour for Full Width of Cross Section	
5.12 Vehicle Front Seat Ballasted for Normal, Full, and Maximum Loads	
5.13 Vehicle Rear Seat Ballasted for Normal Load	
5.14 Vehicle Rear Seat Ballasted for Full and Maximum Loads	
5.15 Vehicle Cargo Area Ballasted for Maximum Load	
5.16 Vehicle on Weight Scales	

SECTION 1
INTRODUCTION

1.1 PURPOSE OF COMPLIANCE TEST

A 2010 Toyota Venza four-door MPV was tested to determine if the vehicle was in compliance with the requirements of FMVSS 110. All tests were conducted in accordance with NHTSA, Office of Vehicle Safety Compliance (OVSC) Laboratory Test Procedure, TP-110T-02, dated August 31, 2007.

This standard establishes requirements to ensure that applicable vehicles are equipped with tires of adequate size and load rating and rims of appropriate size and type designation. This standard also establishes location, content, and format requirements for the Vehicle Placard and optional Tire Inflation Pressure Label.

1.2 TEST VEHICLE

The test vehicle was a 2010 Toyota Venza four-door MPV. Nomenclatures applicable to the test vehicle are:

- A. Vehicle Identification Number: 4T3ZA3BB2AU021370
- B. NHTSA Number: CA5105
- C. Manufacturer: Toyota Motor Manufacturing
- D. Manufacture Date: 11/2009

1.3 TEST DATE

The test vehicle was tested March 18 through March 29, 2010.

SECTION 2

TEST PROCEDURE AND SUMMARY OF RESULTS

2.1 TEST PROCEDURE

The test vehicle was inspected for completeness, systems operability, and appropriate fuel and liquid levels, i.e. oil and coolant. The vehicle was then photographically documented as required by the NHTSA/OVSC Test Procedure. Vehicle labeling, tire, and rim information was recorded. The owner's manual was reviewed.

Subsequent events included weighing the vehicle to establish delivered Unloaded Vehicle Weight and the distribution of weight on the front and rear axles and each wheel position. The vehicle was ballasted to its Normal Load, Full Occupant Load, and Maximum Vehicle Load weight. At each step of the ballasting procedure, data was recorded. Ballast was photographically documented for Normal, Full, and Maximum Vehicle Load weight. The vehicle maximum load on each wheel was measured. Data from each tire furnished with the vehicle were recorded. Tire size information was taken from vehicle certification label and vehicle placard. The right front wheel was removed from the vehicle and the tire was dismounted from the rim. The rim was measured from flange to flange, and rim markings were photographically documented. The owner's manual was checked for all required information on tire loading, and on general tire and loading parameters.

2.2 SUMMARY OF RESULTS

The Toyota Venza test vehicle appears to be in compliance with all FMVSS 110 requirements tested.

SECTION 3

TEST DATA

DATA SUMMARY SHEET (1 of 2)

VEHICLE MAKE/MODEL/BODY STYLE: 2010 Toyota Venza four-door MPV

VEHICLE NHTSA NUMBER: CA5105 VIN: 4T3ZA3BB2AU021370

VEHICLE TYPE: MPV DATE OF MANUFACTURE: 11/2009

LABORATORY: US DOT San Angelo Test Facility

LIGHT TRUCK TYPE REQUIREMENTS

PASS/FAIL

General (Data Sheet 2)

The vehicle must be equipped with tires that meet the requirements of S139. (S110, S4.1)

PASS

Tire Load Limits (Data Sheet 2)

The sum of the maximum load ratings of the tires fitted to an axle is not less than the gross axle weight rating (GAWR) of the axle system as specified on the certification label. When passenger car tires are installed, each tire's load rating is reduced by dividing it by 1.10 before determining the sum of the maximum load ratings of the tires fitted to an axle. (S110, S4.2.2.1, S4.2.2.2)

PASS

When passenger car tires are installed, the vehicle normal load on the tire is not greater than the value of 94 percent of the de-rated load rating at the vehicle manufacturer's recommended cold inflation pressure for that tire. When LT tires are installed, the vehicle normal load on the tire is not greater than the value of 94 percent of the load rating at the vehicle manufacturer's recommended cold inflation pressure for that tire. (S110, S4.2.2.3(a), (b))

PASS

Rim (Data Sheet 3)

Each rim is constructed to the dimensions of a rim referred to in FMVSS 139 that is listed by the manufacturer of the tires as suitable for use with those tires. (S110, S4.4.1(a))

PASS

Each rim is properly marked. (S110, S4.4.2)

PASS

Vehicle rims retain deflated tires during a controlled braking application. (S110, S4.4.1(b))

**See
Remarks**

DATA SUMMARY SHEET (2 of 2)

Certification, Placard, and Tire Inflation Pressure Labels (Data Sheet 4)

The placard and tire inflation pressure label (if provided) are affixed and located correctly, and display the information and format required. (S110, S4.3)

PASS

The Part 567 certification label shows the size designation of the tires and rims appropriate for the vehicle including the tire size(s) listed on the vehicle placard and, if provided, tire inflation pressure label. (S110, S4.3.3)

PASS

No inflation pressure other than the maximum permissible inflation pressure is shown on the placard and, if any, tire inflation pressure label unless as required. (S110, S4.3.4)

PASS

Vehicle Weight Distribution (Data Sheet 5)

The Gross Vehicle Weight Rating (GVWR) is not less than the sum of the unloaded vehicle weight, rated cargo load, and 68 kg times the vehicle's designated seating capacity. However, for school buses, the minimum occupant weight allowance is 54 kg. (49 CFR 567, *Certification*)

PASS

Owner's Manual (Data Sheet 6)

Owner's manual or other document has discussion of Vehicle Placard, Loading and Tires. (575.6(a)(4))

PASS

Owner's manual includes exact statement relating to "Steps for Determining Correct Load Limits". (575.6(a)(5))

PASS

REMARKS: The rim retention test required by FMVSS No.110, paragraph S4.4.1(b) was not executed on the subject Toyota Venza.

RECORDED BY: Todd P. Groghan

DATE: March 29, 2010

APPROVED BY: Kenneth H. Yates

**DATA SHEET 1
TEST VEHICLE INFORMATION / RECEIVING INSPECTION**

VEHICLE MAKE/MODEL/BODY STYLE: 2010 Toyota Venza four-door MPV

VEHICLE NHTSA NUMBER: CA5105 TEST DATE: March 18, 2010

VIN: 4T3ZA3BB2AU021370 MANUFACTURE DATE: 11/2009

GVWR: 2,245 kg (4,960 lbs) GAWR (front): 1,400 kg (3,090 lbs)

GAWR (rear): 1,230 kg (2,715 lbs)

SEATING POSITIONS: FRONT 2 REAR 3

ODOMETER READING AT START OF TEST: 18 km (11 mi)

ENGINE DATA: 4 Cylinders 2.7 Liters Cubic Inches

TRANSMISSION DATA: X Automatic Manual 6 No. of Speeds

FINAL DRIVE DATA: Rear Drive X Front Drive 4 Wheel Drive

CHECK APPROPRIATE BOXES FOR INSTALLED VEHICLE EQUIPMENT:

<input checked="" type="checkbox"/>	Air Conditioning	<input checked="" type="checkbox"/>	Traction Control	<input checked="" type="checkbox"/>	Clock
<input checked="" type="checkbox"/>	Tinted Glass	<input checked="" type="checkbox"/>	Tachometer	<input type="checkbox"/>	Roof Rack
<input checked="" type="checkbox"/>	Power Steering	<input checked="" type="checkbox"/>	Cruise Control	<input checked="" type="checkbox"/>	Console
<input checked="" type="checkbox"/>	Power Windows	<input checked="" type="checkbox"/>	Rear Window Defroster	<input checked="" type="checkbox"/>	Driver Air Bag
<input checked="" type="checkbox"/>	Power Door Locks	<input type="checkbox"/>	Sun Roof or T-Top	<input checked="" type="checkbox"/>	Passenger Air Bag
<input checked="" type="checkbox"/>	Power Seat(s)	<input checked="" type="checkbox"/>	Tilt Steering Wheel	<input checked="" type="checkbox"/>	Side Curtain Air Bag(s)
<input checked="" type="checkbox"/>	Power Brakes	<input checked="" type="checkbox"/>	Stereo	<input checked="" type="checkbox"/>	Front Disc Brakes
<input checked="" type="checkbox"/>	Antilock Brake System	<input type="checkbox"/>	Telephone	<input checked="" type="checkbox"/>	Rear Disc Brakes
<input type="checkbox"/>	Navigation System	<input type="checkbox"/>	Trailer Hitch	<input type="checkbox"/>	Other -

REMARKS: None

RECORDED BY: Todd P. Groghan

DATE: March 18, 2010

APPROVED BY: Kenneth H. Yates

DATA SHEET 2 (1 of 2)
VEHICLE TIRE IDENTIFICATION AND LOAD LIMITS

VEHICLE MAKE/MODEL/BODY STYLE: 2010 Toyota Venza four-door MPV

VEHICLE NHTSA NUMBER: CA5105 VIN: 4T3ZA3BB2AU021370

LABORATORY: US DOT San Angelo Test Facility TEST DATE: March 18, 2010

All tires on the vehicle (excluding the spare) are the same make and model: (X) YES () NO

All tires on the vehicle (excluding the spare) are the same size: (X) YES () NO

Spare tire is the same size as all other tires: () YES (X) NO

Tire Sidewall	Right Front	Left Rear (If different)	Spare Tire (If different)
Manufacturer and Model	<u>Bridgestone Dueler H/L 400</u>	<u></u>	<u>Bridgestone Tracomp-2</u>
Tire Size Designation	<u>P245/55R19</u>	<u></u>	<u>T165/90D18</u>
Load Index/Speed Symbol	<u>103S</u>	<u></u>	<u>107M</u>
Maximum Inflation Pressure	<u>300 kPa (44 psi)</u>	<u></u>	<u>420 kPa (60 psi)</u>
Maximum Load Rating	<u>875 kg (1,929 lbs)</u>	<u></u>	<u>975 kg (2,149 lbs)</u>
Tread/Traction/Temperature	<u>400/B/B</u>	<u></u>	<u>N/A</u>
Tires Have "DOT" Markings	<u>Yes</u>	<u></u>	<u>Yes</u>

Serial Number: Right Front 0B7C4014409 Left Front 0B7C4014409
Right Rear 0B7C4014409 Left Rear 0B7C4014409
Spare EHMDBEM3809

DATA SHEET 2 (2 of 2)
VEHICLE TIRE IDENTIFICATION AND LOAD LIMITS

MOUNTED TIRE VS. AXLE RATING COMPARISON (at sidewall maximum inflation pressure)		
	FRONT AXLE	REAR AXLE
A. GAWR from certification label	1,400 kg (3,090 lbs)	1,230 kg (2,715 lbs)
B. Tire Maximum Load Rating from above	875 kg (1,929 lbs)	875 kg (1,929 lbs)
C. Reduced tire load rating if applicable*	795.5 kg (1,753.6 lbs)	795.5 kg (1,753.6 lbs)
D. (No. of tires) x (Tire load rating, de-rated if appropriate)	1,591.0 kg (3,507.2 lbs)	1,591.0 kg (3,507.2 lbs)
Is "D" equal to or greater than "A"? (Yes/No)	Yes	Yes

* If a passenger car tire is installed on a multipurpose passenger vehicle (MPV), truck or bus, the tire's load rating is reduced by dividing by 1.10.

DATA INDICATES COMPLIANCE:

PASS/FAIL: PASS

REMARKS: None

RECORDED BY: Todd P. Groghan

DATE: March 18, 2010



APPROVED BY: Kenneth H. Yates

**DATA SHEET 3
VEHICLE RIM IDENTIFICATION**

VEHICLE MAKE/MODEL/BODY STYLE: 2010 Toyota Venza four-door MPV

VEHICLE NHTSA NUMBER: CA5105 VIN: 4T3ZA3BB2AU021370

LABORATORY: US DOT San Angelo Test Facility TEST DATE: March 18, 2010

Rim Markings	RIGHT FRONT	LEFT REAR (if different)
A. Source of published dimensions (letter designation)	J	
B. Rim Size Designation	19X7½ J	
C. Does rim contain DOT symbol? (Yes/No)	Yes	
D. Manufacturer's name, symbol or trademark (copy format)		
E. Date of manufacture or symbol (copy format)		
F. Letter height (not less than 3 mm)	6 mm	
G. Lettering (impressed or embossed)	Embossed	
H. Are all rim markings legible? (Yes/No)	Yes	
Do items A-C appear on weather side of rim (Yes/No)	Yes	
Do all markings comply with requirements (Yes/No)	Yes	

Rim Measurements	RIGHT FRONT	LEFT REAR (If different)
Rim width	19.1 cm (7.5 in)	
Rim diameter	48.3 cm (19 in)	
Rim measurements same as rim markings?	Yes	

Rims are suitable for tires on vehicle? (X)YES () NO

Reference source used for tire/rim match verification:

2009 Tire and Rim Association Yearbook and 2010 Japan Automobile Tyre Manufacturers Association Yearbook

DATA INDICATES COMPLIANCE:

PASS/FAIL: PASS

REMARKS: None

RECORDED BY: Todd P. Groghan

DATE: March 18, 2010

APPROVED BY: Kenneth H. Yates

DATA SHEET 4 (1 of 3)
VEHICLE PLACARD AND TIRE INFLATION PRESSURE LABEL

VEHICLE MAKE/MODEL/BODY STYLE: 2010 Toyota Venza four-door MPV

VEHICLE NHTSA NUMBER: CA5105 VIN: 4T3ZA3BB2AU021370

LABORATORY: US DOT San Angelo Test Facility TEST DATE: March 18, 2010

Identification of Vehicle Labeling

	(Yes/No)	Location	PASS/FAIL
1. Certification Label*	<u>Yes</u>	<u>Driver's side B pillar</u>	<u>PASS</u>
2. Vehicle Placard*	<u>Yes</u>	<u>Driver's side B pillar</u>	<u>PASS</u>
3. Tire Inflation Pressure Label*	<u>N/A</u>	<u></u>	<u></u>

* Labels must be located as specified in section 12.4 of test procedure.

Vehicle Placard

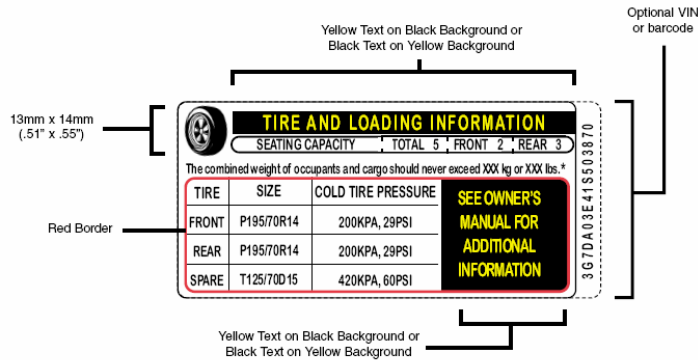


FIGURE 1
(70 FR 14425)

Vehicle Placard has the exact color and format as specified in the above Figure 1 and text is in English language. (X) YES () NO

Vehicle Placard and, if provided, **Tire Inflation Pressure Label** are permanently affixed. (X) YES () NO

DATA SHEET 4 (2 of 3)
VEHICLE PLACARD AND TIRE INFLATION PRESSURE LABEL

Vehicle Placard Information:

Combined weight of occupants and cargo 370 kg (825 lbs)

Seating Capacity: Total 5; Front 2; Rear 3

Is the number of belted seating positions the same as the labeled seating capacity? (X) YES () NO

Is the tire size and pressure provided? (X) YES () NO

Tire Information:

Tire Size: Front P245/55R19; Rear P245/55R19

Tire Inflation Pressure: Front 220 kPa (32 psi); Rear 220 kPa (32 psi)

Are the sizes of the installed tires the same as the sizes of the labeled tires? (X) YES () NO

Is the labeled cold tire inflation pressure equal to or less than the sidewall labeled maximum cold tire inflation pressure?

Front axle: (X) YES () NO Rear axle: (X) YES () NO

Vehicle Certification Label information:

	Tire Size	Rim Size Designation	Rim Suitable for Tire?*
Front Axle	<u>P245/55R19</u>	<u>19x7½ J</u>	<u>Yes</u>
Rear Axle	<u>P245/55R19</u>	<u>19x7½ J</u>	<u>Yes</u>

*Reference source used for tire/rim match verification:

2009 Tire and Rim Association Yearbook and 2010 Japan Automobile Tyre

Manufacturers Association Yearbook

DATA SHEET 4 (3 of 3)
VEHICLE PLACARD AND TIRE INFLATION PRESSURE LABEL

Is (Are) tire size(s) listed on the vehicle placard and/or tire inflation pressure label also listed on the certification label with suitable rim size? (X) YES () NO

LABELED TIRE CAPACITY AT SPECIFIED PRESSURE		
GVWR <u>2,245 kg (4,960 lbs)</u>	FRONT AXLE	REAR AXLE
A. GAWR from certification label	1,400 kg (3,090 lbs)	1,230 kg (2,715 lbs)
B. Tire load rating of labeled tire size at labeled inflation pressure*	805 kg (1,775 lbs)	805 kg (1,775 lbs)
C. Reduced tire load rating if applicable**	731.8 kg (1,613.6 lbs)	731.8 kg (1,613.6 lbs)
D. (No. of tires) x (Tire load rating de-rated if appropriate)	1,463.6 kg (3,227.2 lbs)	1,463.6 kg (3,227.2 lbs)
Is "D" equal to or greater than "A"?	Yes	Yes

*Reference source used for determining load rating:

2009 Tire and Rim Association Yearbook

** If a passenger car tire is installed on a multipurpose passenger vehicle (MPV), truck or bus, the tire's load rating is reduced by dividing by 1.10.

DATA INDICATES COMPLIANCE:

PASS/FAIL: PASS

REMARKS: None

RECORDED BY: Todd P. Groghan

DATE: March 18, 2010

APPROVED BY: Kenneth H. Yates

DATA SHEET 5 (1 of 4)
CURB WEIGHT, NORMAL LOAD WEIGHT & MAXIMUM VEHICLE WEIGHT

VEHICLE MAKE/MODEL/BODY STYLE: 2010 Toyota Venza four-door MPV

VEHICLE NHTSA NUMBER: CA5105 VIN: 4T3ZA3BB2AU021370

LABORATORY: US DOT San Angelo Test Facility TEST DATE: March 29, 2010

Full Fluid Levels: Fuel Full Coolant Full Other Fluids* Full

*Windshield washer fluid, brake fluid, transmission fluid, and engine oil

Tire Pressures: LF 220 kPa (32 psi) LR 220 kPa (32 psi)
(cold, prior to loading vehicle) RF 220 kPa (32 psi) RR 220 kPa (32 psi)

A. MEASURED CURB WEIGHT WITH INSTALLED OPTIONS AND ACCESSORIES

Measured Unloaded Vehicle Weight

LF	<u>494 kg (1,090 lb)</u>	LR	<u>371 kg (818 lb)</u>
RF	<u>480 kg (1,058 lb)</u>	RR	<u>361 kg (796 lb)</u>
Front Axle	<u>974 kg (2,148 lb)</u>	Rear Axle	<u>732 kg (1,614 lb)</u>
Total Vehicle Weight		<u>1,706 kg (3,762 lb)</u>	

B. MEASURED VEHICLE NORMAL LOAD WEIGHT

(1) Seating Capacity from Vehicle Placard = 5

(2) Normal Load Number of Occupants 3

Occupant Distribution: Front Seat 2 Rear 1

(3) Total Normal Occupant Load 204 kg (450 lb)
[# of occupants x 68 KG per occupant]

(4) Measured Normal Load on Axles

LF	<u>538 kg (1,186 lb)</u>	LR	<u>430 kg (947 lb)</u>
RF	<u>523 kg (1,153 lb)</u>	RR	<u>420 kg (926 lb)</u>
Front Axle	<u>1,061 kg (2,339 lb)</u>	Rear Axle	<u>850 kg (1,873 lb)</u>
Total Vehicle Weight		<u>1,911 kg (4,212 lb)</u>	

DATA SHEET 5 (2 of 4)
CURB WEIGHT, NORMAL LOAD WEIGHT & MAXIMUM VEHICLE WEIGHT

(5) Calculated Vehicle Normal Load on the Tire

Front Tires [measured front axle normal load/2] = 530.5 kg (1,169.5 lbs)

Rear Tires [measured rear axle normal load/2] = 425.0 kg (936.5 lbs)

(6) Measured Normal Load on Tire vs. Value of 94% of Load Rating for that Tire at Specified Pressure

MEASURED NORMAL LOAD ON TIRE VS. VALUE OF 94% OF LOAD RATING FOR THAT TIRE AT SPECIFIED PRESSURE		
	FRONT AXLE	REAR AXLE
A. Calculated Vehicle Normal Load on the Tire from (5)	530.5 kg (1,169.5 lbs)	425.0 kg (936.5 lbs)
B. Tire load rating of installed tire size at recommended inflation pressure*	805 kg (1,775 lbs)	805 kg (1,775 lbs)
C. Reduced tire load rating if applicable**	731.8 kg (1,613.6 lbs)	731.8 kg (1,613.6 lbs)
D. 94% of tire load rating, (de-rated if appropriate)	687.9 kg (1,516.8 lbs)	687.9 kg (1,516.8 lbs)
Is "D" equal to or greater than "A"?	Yes	Yes

*Reference source used for determining load rating:
2009 Tire and Rim Association Yearbook

** If a passenger car tire is installed on a multipurpose passenger vehicle (MPV), truck or bus, the tire's load rating is reduced by dividing by 1.10.

Vehicle Normal Load on the tire is not greater than 94% of the Recommended Cold Inflation Load Rating.

	PASS/FAIL
Front Tires	<u>PASS</u>
Rear Tires	<u>PASS</u>

DATA SHEET 5 (3 of 4)
CURB WEIGHT, NORMAL LOAD WEIGHT & MAXIMUM VEHICLE WEIGHT

C. MEASURED VEHICLE WEIGHT WITH FULL OCCUPANT LOAD

Seating Capacity: Total 5 ; Front 2 ; Rear 3

Full Occupant Load 340 kg (750 lbs)

[# of occupants x 68 KG per adult occupant and 54 KG per student occupant]

LF	<u>548 kg (1,208 lb)</u>	LR	<u>488 kg (1,075 lb)</u>
RF	<u>536 kg (1,182 lb)</u>	RR	<u>475 kg (1,047 lb)</u>
Front Axle	<u>1,084 kg (2,390 lb)</u>	Rear Axle	<u>963 kg (2,122 lb)</u>
Total Vehicle Weight <u>2,047 kg (4,512 lb)</u>			

D. MEASURED MAXIMUM VEHICLE LOAD WEIGHT

(1) Vehicle Capacity Weight (adjusted from placard*) 367 kg (809 lbs)

(2) Full Occupant Load (from above) 340 kg (750 lbs)

(3) Luggage/Cargo Load (subtract (2) from (1)) 27 kg (59 lbs)

(4) Measured Vehicle Maximum Load on Axles

LF	<u>547 kg (1,205 lb)</u>	LR	<u>503 kg (1,109 lb)</u>
RF	<u>534 kg (1,177 lb)</u>	RR	<u>490 kg (1,080 lb)</u>
Front Axle	<u>1,081 kg (2,382 lb)</u>	Rear Axle	<u>993 kg (2,189 lb)</u>
Total Vehicle Weight <u>2,074 kg (4,571 lb)</u>			

*Original max cargo and occupant weight limit of 370 kg (825 lbs), specified on the vehicle placard, has been reduced to 367 kg (809 lbs), due to presence of Load Carrying Capacity Modification Label posted on driver's side B pillar (see Figure 5.3, page 23).

DATA SHEET 5 (4 of 4)
VEHICLE WEIGHT DISTRIBUTION

ITEM	Tire or Vehicle Rating*	Unloaded Vehicle Weight		Vehicle Weight with Normal Occupant Load		Vehicle Weight with Full Occupant Load		Vehicle Maximum Weight with Occupants and Cargo	
		Measured	Over-load	Measured	Over-load	Measured	Over-load	Measured	Over-load
Left Front Tire	731.8 kg (1,613.6 lbs)	494 kg (1,090 lbs)	no	538 kg (1,186 lbs)	no	548 kg (1,208 lbs)	no	547 kg (1,205 lbs)	no
Right Front Tire	731.8 kg (1,613.6 lbs)	480 kg (1,058 lbs)	no	523 kg (1,153 lbs)	no	536 kg (1,182 lbs)	no	534 kg (1,177 lbs)	no
Front Axle (GAWR)	1,400 kg (3,090 lbs)	974 kg (2,148 lbs)	no	1,061 kg (2,339 lbs)	no	1,084 kg (2,390 lbs)	no	1,081 kg (2,382 lbs)	no
Left Rear Tire	731.8 kg (1,613.6 lbs)	371 kg (818 lbs)	no	430 kg (947 lbs)	no	488 kg (1,075 lbs)	no	503 kg (1,109 lbs)	no
Right Rear Tire	731.8 kg (1,613.6 lbs)	361 kg (796 lbs)	no	420 kg (926 lbs)	no	475 kg (1,047 lbs)	no	490 kg (1,080 lbs)	no
Rear Axle (GAWR)	1,230 kg (2,715 lbs)	732 kg (1,614 lbs)	no	850 kg (1,873 lbs)	no	963 kg (2,122 lbs)	no	993 kg (2,189 lbs)	no
Total Vehicle (GVWR)	2,245 kg (4,960 lbs)	1,706 kg (3,762 lbs)	no	1,911 kg (4,212 lbs)	no	2,047 kg (4,512 lbs)	no	2,074 kg (4,571 lbs)	no

*Vehicle and axle weight ratings (GVWR & GAWR) are located on the vehicle certification label. Vehicle tire load ratings are based upon the inflation pressure specified on the Vehicle Placard or Tire Inflation Pressure Label for each respective axle, as determined from the appropriate Tire and Rim reference manual. If a passenger car tire is installed on a multipurpose passenger vehicle (MPV), truck, or bus, the tire's load rating is reduced by dividing by 1.10.

DATA INDICATES COMPLIANCE:

PASS/FAIL: PASS

REMARKS: None

RECORDED BY: Todd P. Groghan

DATE: March 29, 2010

APPROVED BY: Kenneth H. Yates

DATA SHEET 6 (1 of 2)
OWNER'S MANUAL REQUIREMENTS

VEHICLE MAKE/MODEL/BODY STYLE: 2010 Toyota Venza four-door MPV

VEHICLE NHTSA NO. CA5105 VIN: 4T3ZA3BB2AU021370

LABORATORY: US DOT San Angelo Test Facility TEST DATE: March 22, 2010

Owner's Manual Discusses:

Part 575.6(a) Paragraph	Required Discussion Topic	Discussed in Manual? (YES/NO)	Page Numbers
(4)(i)	Tire labeling, including a description and explanation of each marking on the tires provided with the vehicle, and information about the location of the Tire Identification Number (TIN).	YES	617 - 620
(4)(ii)	(A) Description and explanation of recommended cold tire inflation pressure.	YES	624
	(B) Description and explanation of FMVSS 110 Vehicle Placard and Tire Inflation Pressure Label and their location(s).	YES	509
	(C) Description and explanation of adverse safety consequences of under-inflation including tire failure.	YES	511 - 512
	(D) Description and explanation for measuring and adjusting air pressure to achieve proper inflation.	YES	510
(4)(iii)	Glossary of tire terminology, including "cold tire pressure," maximum inflation pressure," and "recommended inflation pressure," and all non-technical terms defined in S3 of FMVSS 110 & 139.	YES	624 -630
(4)(iv)	Tire care, including maintenance and safety practices.	YES	502 - 508
(4)(v)	(A) Description and explanation of locating and understanding load limit information, total load capacity, seating capacity, towing capacity, and cargo capacity.	YES	236, 509
	(B) Description and explanation for calculating total and cargo load capacities with varying seating configurations including quantitative examples showing/illustrating how the vehicle's cargo and luggage capacity decreases as the combined number and size of occupants increases.	YES	233
	(C) Description and explanation for determining compatibility of tire and vehicle load capabilities.	YES	235
	(D) Description and explanation of adverse safety consequences of overloading on handling and stopping and on tires.	YES	235

DATA SHEET 6 (2 of 2)
OWNER'S MANUAL REQUIREMENTS

The following statement, in the English language, is provided verbatim in the Owner's Manual. Reference Part 575.6(a)(5) YES (X) NO ()

Steps for Determining Correct Load Limit

- (1) Locate the statement "The combined weight of occupants and cargo should never exceed XXX kg or XXX lbs." on your vehicle's placard.
- (2) Determine the combined weight of the driver and passengers that will be riding in your vehicle.
- (3) Subtract the combined weight of the driver and passengers from XXX kg or XXX lbs.
- (4) The resulting figure equals the available amount of cargo and luggage load capacity. For example, if the "XXX" amount equals 1400 lbs. and there will be five 150 lb passengers in your vehicle, the amount of available cargo and luggage load capacity is 650 lbs. (1400-750 (5x150) = 650 lbs.)
- (5) Determine the combined weight of the luggage and cargo being loaded on the vehicle. That weight may not safely exceed the available cargo and luggage load capacity calculated in Step 4.
- (6) If your vehicle will be towing a trailer, load from your trailer will be transferred to your vehicle. Consult this manual to determine how this reduces the available cargo and luggage load capacity of your vehicle.

DATA INDICATES COMPLIANCE:

PASS/FAIL: PASS

REMARKS: None

RECORDED BY: Todd P. Groghan

DATE: March 22, 2010

APPROVED BY: Kenneth H. Yates

SECTION 4

TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

EQUIPMENT	DESCRIPTION	MODEL/ SERIAL NO	CAL. DATE	NEXT CAL. DATE
PLATFORM SCALE (BALLAST)	HOWE RICHARDSON	MODEL #6401 SERIAL #0181- 5509-26	7/28/2009	7/28/2010
AIR PRESSURE GAUGE	ASHCROFT GENERAL PURPOSE DIGITAL GAUGE	MODEL #D1005PS 02L 100 PSI SERIAL #20017398- 01	12/9/2009	12/9/2010
FLOOR SCALES (VEHICLE)	INTERCOMP SW DELUXE SCALES	PART #100156 SERIAL #27032382	7/28/2009	7/28/2010

SECTION 5
PHOTOGRAPHS



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.1
¾ FRONT VIEW FROM LEFT SIDE OF VEHICLE



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.2
¾ REAR VIEW FROM RIGHT SIDE OF VEHICLE

CAUTION LOAD CARRYING CAPACITY REDUCED
Modifications to this vehicle have reduced the original load
carrying capacity by: 16.00 lbs.

MFD. BY: TOYOTA MOTOR MANUFACTURING, KENTUCKY, INC.

11/09

GVWR: 2245KG (4960LB)

GAWR: FRT. 1400 KG (3090LB) WITH P245/55R19 TIRES
19X7.5J RIMS, AT 220KPA (32PSI) COLD.
RR. 1230 KG (2715LB) WITH P245/55R19 TIRES
19X7.5J RIMS, AT 220KPA (32PSI) COLD.

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR
VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON
THE DATE OF MANUFACTURE SHOWN ABOVE.

4T3ZA3BB2AU021370 MPV



C/TR: 202/FA01 AGV10L-AWTGKA

A/TM: -01A/U760E MADE IN U.S.A. 88967

A



TIRE AND LOADING INFORMATION RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

SEATING CAPACITY | TOTAL | FRONT | REAR
NOMBRE DE PLACES | TOTAL: **5** | AVANT: **2** | ARRIÈRE: **3**

The combined weight of occupants and cargo should never exceed 370 kg or 825 lbs.
Le poids total des occupants et du chargement ne doit jamais dépasser 370 kg ou 825 lb.

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS À FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
FRONT AVANT	P245/55R19	220 kPa, 32 PSI	
REAR ARRIÈRE	P245/55R19	220 kPa, 32 PSI	
SPARE DE SECOURS	T165/90D18	420 kPa, 60 PSI	

V4
42661-0T021

2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO.110

FIGURE 5.4
VEHICLE PLACARD



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.5
TIRE SHOWING BRAND



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.6
TIRE SHOWING MODEL



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.7
TIRE SHOWING SIZE, LOAD INDEX, AND SPEED SYMBOL




2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.8
TIRE SHOWING MAX LOAD RATING
AND MAX INFLATION PRESSURE



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.9
TIRE SHOWING SERIAL NUMBER

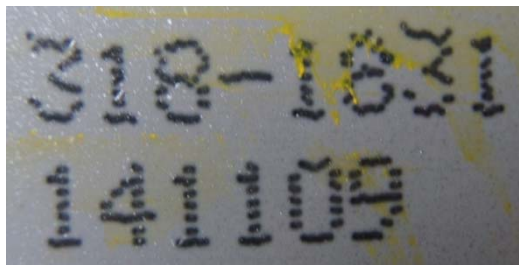

2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.10
RIM MARKINGS INCLUDING LETTER DESIGNATION FOR SOURCE OF PUBLISHED
DIMENSIONS, DOT SYMBOL, MANUFACTURER SYMBOL, RIM SIZE, AND MANUFACTURE DATE



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.11
RIM CONTOUR FOR FULL WIDTH OF CROSS SECTION



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.12
VEHICLE FRONT SEAT BALLASTED
FOR NORMAL, FULL, AND MAXIMUM LOADS



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.13
VEHICLE REAR SEAT BALLASTED
FOR NORMAL LOAD



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.14
VEHICLE REAR SEAT BALLASTED
FOR FULL AND MAXIMUM LOADS



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.15
VEHICLE CARGO AREA BALLASTED FOR MAXIMUM LOAD



2010 TOYOTA VENZA
NHTSA NO. CA5105
FMVSS NO. 110

FIGURE 5.16
VEHICLE ON WEIGHT SCALES