

REPORT NUMBER 114-GTL-11-008

SAFETY COMPLIANCE TESTING FOR FMVSS NO. 114 THEFT PROTECTION

MAZDA MOTOR CORPORATION
2012 MAZDA 5 SPORT MT, PASSENGER CAR
NHTSA NO. CC5400

GENERAL TESTING LABORATORIES, INC.
1623 LEEDSTOWN ROAD
COLONIAL BEACH, VIRGINIA 22443



April 12, 2011

FINAL REPORT

PREPARED FOR

**U. S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
1200 NEW JERSEY AVE., SE
WASHINGTON, D.C. 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By: _____

Approved By: _____

Approval Date: 04/12/11

FINAL REPORT ACCEPTANCE BY OVSC:

Accepted By: 

Acceptance Date: 4/12/11

1. Report No. 114-GTL-11-008	2. Government Accession No. N/A	3. Recipient's Catalog No. N/A
4. Title and Subtitle Final Report of FMVSS 114 Compliance Testing of a 2012 MAZDA 5 SPORT MT PASSENGER CAR NHTSA No. CC5400		5. Report Date April 12, 2011
		6. Performing Organ. Code GTL
7. Author(s) Grant Farrand, Project Engineer Debbie Messick, Project Manager		8. Performing Organ. Rep# GTL-DOT-11-114-008
9. Performing Organization Name and Address General Testing Laboratories, Inc. 1623 Leedstown Road Colonial Beach, Va 22443		10. Work Unit No. (TRAIS) N/A
		11. Contract or Grant No. DTNH22-06-C-00032
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Admin. Enforcement Office of Vehicle Safety Compliance (NVS-220) 1200 New Jersey Ave., S.E., Washington, DC 20590		13. Type of Report and Period Covered Test Date April 4, 2011
		14. Sponsoring Agency Code NVS-221
15. Supplementary Notes		
16. Abstract Compliance tests were conducted on the subject 2012 Mazda 5 Sport MT Passenger Car in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-114-04 for the determination of FMVSS 114 compliance. Test failures identified were as follows: None		
17. Key Words Compliance Testing Safety Engineering FMVSS 114		18. Distribution Statement Copies of this report are available from NHTSA Technical Information Services (TIS) Room W45-212 (NPO-411) 1200 New Jersey Ave., S.E. Washington, DC 20590 Telephone No. (202) 366-4947
19. Security Classif. (of this report) UNCLASSIFIED	21. No. of Pages 24	22. Price
20. Security Classif. (of this page) UNCLASSIFIED		

TABLE OF CONTENTS

SECTION	PAGE
1. Purpose of Compliance Test	1
2. Test Procedure and Summary of Results	2
3. Test Data	3
4. Test Equipment List	13
5. Photographs	14
5.1 ¾ Frontal View from Left Side of Vehicle	
5.2 Vehicle Certification Label	
5.3 Vehicle Tire Information Label	
5.4 Close-up View of Key	
5.5 Close-up View of Ignition Switch	
5.6 Transmission Gear Selection Control	

SECTION 1

PURPOSE OF COMPLIANCE TEST

1.0 PURPOSE OF TEST

A model year 2012 Mazda 5 Sport MT Passenger Car was subjected to Federal Motor Vehicle Safety Standard (FMVSS) No. 114 testing to determine if the vehicle was in compliance with the requirements of the standard. FMVSS 114 specifies requirements to decrease the likelihood that a vehicle is stolen, or accidentally set in motion.

1.1 The test vehicle was a 2012 Mazda 5 Passenger Car. The vehicle was identified as follows:

A. Vehicle Identification Number: JM1CW2BL6C0100767

B. NHTSA No.: CC5400

C. Manufacturer: MAZDA MOTOR CORPORATION

D. Manufacture Date: 11/10

E. Color: Copper Red Mica

1.2 TEST DATE

The test vehicle was subjected to FMVSS No. 114 testing on April 4, 2011.

SECTION 2

TEST PROCEDURE AND SUMMARY OF RESULTS

2.0 TEST PROCEDURE

All tests were conducted in accordance with NHTSA, Office of Vehicle Safety Compliance (OVSC) Laboratory Procedure TP-114-04 and General Testing Laboratories, Inc. (GTL) Test Procedure, TP-114-04, "Theft Protection and Rollaway Prevention".

2.1 SUMMARY OF RESULTS

Test data indicate the FMVSS 114 requirements appear to have been satisfied. All test data resulting from the tests were recorded on test data sheets in Section 3.

SECTION 3

TEST DATA

3.0 TEST RESULTS

The following data sheets document the results of FMVSS 114 testing on the 2012 Mazda 5 Sport MT.

FMVSS 114, THEFT PROTECTION
DATA SHEET 1 – VEHICLE IDENTIFICATION

TEST DATE: 04/04/11 LAB.: General Testing Laboratories
 CONTRACT: DTNH22-06-C-00032 VEH. NHTSA NO.: CC5400
 VIN: JM1CW2BL6C0100767 BUILD DATE: 11/10

MY/MAKE/MODEL/BODY STYLE: 2012 Mazda 5 Sport MT

TRANSMISSION TYPE:

Automatic ; Manual ; Other (describe: _____)

DRIVE TRAIN TYPE:

Front Wheel ; Rear Wheel ; 4-Wheel

FUEL TANK LEVEL: 100 (% OF max.) MILEAGE: 116

VEHICLE STARTING SYSTEM:

Location of the starting system:

Located on Right Side of Steering Column.

Selectable settings:

Off, Accessory, On, Start

Explain how the system is activated:

The system is activated when the key is inserted into receptacle and turned clockwise.

KEY

Description of the key:

Traditional Metal Key with embedded code.

STARTING SYSTEM ACTIVATION

Describe how the key is inserted into the starting system:

The key is inserted into the starting system by physical means.

Describe how the key is used to activate the starting system:

The System is activated by inserting the key into the starting system and turning it to the start position. For manual transmission, the clutch pedal must be depressed all the way down.

Describe how the key is removed from the starting system:

Turn key to the off position and pull key out of key cylinder.

FMVSS 114, THEFT PROTECTION
DATA SHEET 1 continued

GEAR SELECTION CONTROL

Describe the gear selection control:

Manual transmission gear selector located on center console between front seats.

Describe how the gear selection control is activated:

With the clutch pedal depressed all the way down, manually move the gear selector to the desired position.

Describe all of the selectable settings:

Reverse, Neutral, 1, 2, 3, 4, 5, 6

IMMOBILIZER

Is the vehicle equipped with an immobilizer YES NO

Describe the immobilizer device and how it prevents vehicle theft (if equipped):

Unless a coded key programmed to the vehicle is used, the engine will not start.

OPTIONAL RELEASE DEVICES

Describe if the vehicle is equipped with optional release devices:

None

OPTIONAL RELEASE DEVICES:

Key Removal Gear Selection Control None Other

VEHICLE FLUIDS

Check all vehicle fluids and adjust to the proper levels for operation: Full

VEHICLE TIRE PLACARD INFORMATION

Vehicle Mfg. Recommended Tire Inflation Pressure

(kPa): Front Rear


TIRE INFLATION PRESSURES:

Measured (kPa): LF LR RF RR

WEIGHT

Vehicle Curb Weight(kg): Weight of Driver (kg): (target = 91kg)

FMVSS 114, THEFT PROTECTION
DATA SHEET 2

REQUIREMENT S5.1.1	PASS	FAIL
Engine cannot be started without using the key ___Yes ___X_No	X	
<p>With key removed, steering wheel locks: Yes: _____ No: <u>X</u></p> <p>Identify steering wheel locking position(s) on wheel using arrow(s)</p> <p>Clockwise: _____ (degrees) Counterclockwise: _____ (degrees)</p> <div style="text-align: right; margin-right: 50px;">  </div> <p>Service brake must be depressed in order to start engine Yes _____ No <u>X</u></p> <p>Key removal prevents forward self-mobility: Yes: <u>X</u> No: _____</p> <p>If yes describe: Engine will not start when the coded key is not present.</p>		
<p>When key is removed from the starting system, starting of the engine or motor and either steering or self mobility is prevented. Yes: <u>X</u> No: _____</p>	X	

REMARKS:

FMVSS 114, THEFT PROTECTION
DATA SHEET 2 continued

REQUIREMENT S5.1.3	PASS	FAIL
<p>An audible warning is activated whenever the key is in any starting system position with the exception of "on" and "start" and the door closest to the driver's designated seating position is opened.</p> <p style="text-align: right;">Yes <u> X </u> No _____</p> <p>Identify ALL key/starting system position setting: <u> OFF, ACCESSORY, ON, START </u></p>	X	

REQUIREMENT S5.1.4	PASS	FAIL
<p>With the vehicle engine or motor shut down and the transmission gear selection control in any position other than "park";</p> <p>The steering wheel can rotate without locking? Yes <u> X </u> No _____</p>	X	
<p>The vehicle is free to roll forward? Yes <u> X </u> No _____</p>	X	

REMARKS: Vehicle equipped with a manual transmission.

RECORDED BY: G. Farrand
APPROVED BY: D. Messick

DATE: 04/04/11

FMVSS 114, ROLLAWAY PREVENTION
DATA SHEET 3
(for vehicles equipped with transmission with a "park" position)

VEH. NHTSA NO.: CC5400

TEST DATE: 04/04/11

REQUIREMENT S5.2.1	PASS	FAIL
<p>The starting system prevents key removal in ALL gear selection control positions except "park". Yes _____ No _____</p> <p>Can the gear selection control be placed between each gear selection position and will it remain there without assistance? Yes _____ No _____</p> <p>If yes, can the key be removed from the starting system? Yes _____ No _____</p> <p>If the key can be removed from the vehicle starting system when the gear selection control is not locked in "park", a mechanism shall exist which, upon key removal, the vehicle transmission or gear selection control shall become locked in "park" as the direct result of removing the key. If such a mechanism exists, describe the mechanism and its function:</p>	N/A*	

REQUIREMENT S5.2.2	PASS	FAIL
<p>The gear selection control is locked in the "park" position when the key is removed from the starting system. Yes _____ No _____</p>	N/A*	

REMARKS: * Manual Transmission

DATA SHEET 3 continued

REQUIREMENT S5.2.3	PASS	FAIL
<p><u>KEY REMOVAL OVERRIDE OPTION:</u></p> <p>The vehicle is equipped with an override device that allows the user to Remove the key from the “starting system without the transmission or gear selection control in the “park” position. Yes_____ No _____</p> <p>If <u>yes</u>, describe the override device design and mode of activation:</p> <p>Fill in the section below that describes the condition for which the user is allowed to remove the key from the starting system without the transmission or gear selection control in the “park” position:</p> <p><u>ELECTRICAL FAILURE</u></p> <p>In the event of an electrical failure, including battery discharge, key removal from the starting system without the transmission or gear selection control locked in “park” is permitted”. Yes_____ No _____</p> <p><u>OVERRIDE DEVICE WITH NO COVER:</u></p> <p>The following condition is prevented: Steering_____ Self-Mobility_____</p> <p>The device requires both the use of a tool to activate and simultaneous activation of the override device and removal of the key from the starting system Yes_____ No _____</p> <p><u>OVERRIDE DEVICE WITH AN OPAQUE COVER</u></p> <p>The following condition is prevented: Steering_____ Self-Mobility_____</p> <p>The device is covered by an opaque surface which prevents sight of and use of the device. Yes_____ No _____</p> <p>The opaque surface can only be removed by using a screwdriver or other tool: Yes_____ No _____</p>	<p>N/A*</p> <p>N/A*</p> <p>N/A</p> <p>N/A</p>	

REMARKS: * Manual Transmission

DATA SHEET 3 continued

REQUIREMENT S5.2.4	PASS	FAIL
<p><u>GEAR SELECTION CONTROL OVERRIDE DEVICE</u></p> <p>The vehicle is equipped with an override device that allows the user to move the gear selection control from “park” after the key has been removed from the starting system. Yes _____ No _____</p> <p>If yes, select the type of override device used: Key _____ Opaque Cover _____ No Cover _____</p> <p>Describe the override device design and mode of activation (if equipped): Small cover on right side of shifter which when removed allows a key to be inserted to release shifter.</p> <p>FILL IN THE SECTION BELOW THAT APPLIES:</p> <p><u>OVERVERRIDE OPERATED WITH KEY:</u></p> <p>The key is required to operate the override device that allows the user to move the gear selection control from “park” after the key has been removed from the starting system. Yes _____ No _____</p> <p><u>OVERVERRIDE DEVICE WITH NO COVER</u></p> <p>As a direct result of removing the key from the starting system, the following is prevented: Steering _____ Self-Mobility _____</p> <p>The override device requires the use of a tool to operate. Yes _____ No _____</p> <p>Simultaneous activation of the override device and movement of the gear selection control from “park” is required Yes _____ No _____</p> <p><u>OVERVERRIDE DEVICE WITH AN OPAQUE COVER</u></p> <p>As a direct result of removing the key from the starting system, the following is prevented: Steering _____ Self-Mobility _____</p> <p>The opaque surface cover prevents sight of and use of the device: Yes _____ No _____</p> <p>The opaque surface cover can only be removed by using a screwdriver or other tool: Yes _____ No _____</p>	<p>N/A*</p> <p>N/A*</p> <p>N/A*</p> <p>N/A*</p>	

REMARKS: * Manual Transmission

DATA SHEET 3 continued

REQUIREMENTS S5.2.5	PASS	FAIL
<p><u>VEHICLE FACING UPHILL ON 10% GRADE</u></p> <p>With the gear selection control in “park” measure movement of the vehicle down the slope upon releasing the service brake.</p> <p>Test grade: _____ % (9% to 15%) Measured movement: _____ mm (150mm maximum)</p> <p>NOTE: Repeat procedure if vehicle fails on grade in excess of 10%.</p> <p>Test grade: _____ % (9% to 10%) Measured movement: _____ mm (150 mm maximum)</p> <p><u>VEHICLE FACING DOWNHILL ON 10% GRADE</u></p> <p>With the gear selection control in “park” measure movement of the vehicle down the slope upon releasing the service brake.</p> <p>Test grade: _____ % (9% to 15%) Measured movement: _____ mm (150mm maximum)</p> <p>NOTE: Repeat procedure if vehicle fails on grade in excess of 10%.</p> <p>Test grade: _____ % (9% to 10%) Measured movement: _____ mm (150 mm maximum)</p>	N/A*	

REMARKS: * Manual Transmission

DATA SHEET 3 continued

REQUIREMENTS S5.3	PASS	FAIL
With the key in the "OFF" position, the transmission will shift out of "PARK" without the service brake being applied. Yes___ No___	<u>N/A*</u>	
With the key in the "ACC" position, the transmission will shift out of "PARK" without the service brake being applied. Yes___ No___	<u>N/A*</u>	
With the key in the "ON" position (engine off), the transmission will shift out of "PARK" without the service brake being applied. Yes___ No___	<u>N/A*</u>	
With the key in the "START" position, the transmission will shift out of "PARK" without the service brake being applied. Yes___ No___	<u>N/A*</u>	
With the key in the "OTHER" position (please specify), the transmission will shift out of "PARK" without the service brake being applied. Yes___ No___	<u>N/A*</u>	
Does the key stay between starting system positions without being held by operator? Yes___ No___ If so, please describe.	<u>N/A*</u>	
With the vehicle battery disconnected, the gear selection control is locked in the "PARK" position. Yes___ No___	<u>N/A*</u>	
Brake force readings (force required to allow the transmission to shift out of "park"):		
The vehicle is equipped with adjustable pedals: Yes___ No___	<u>N/A*</u>	
Fore Position: _____ Aft Position (if applicable)		
Reading 1 _____ Reading 1 <u>N/A</u>		
Reading 2 _____ Reading 2 <u>N/A</u>		
Reading 3 _____ Reading 3 <u>N/A</u>		
Reading 4 _____ Reading 4 <u>N/A</u>		
Reading 5 _____ Reading 5 <u>N/A</u>		
Avg. _____ Avg. <u>N/A</u>		
For vehicles equipped with adjustable pedals, record readings for both the Fore and Aft positions. For non-adjustable pedal vehicles, use the Fore position column to record values.	<u>N/A</u>	

REMARKS: * Manual Transmission

RECORDED BY: G. Farrand
 APPROVED BY: D. Messick

DATE: 04/04/11

SECTION 4
TEST EQUIPMENT LIST


ITEM	MFR	MODEL	S/N	CAL. PERIOD	DATE OF NEXT CALIB.	REMARKS
SLR DIGITAL CAMERA	NIKON	D50	N/A	N/A	N/A	
TIRE PRESSURE GAUGE	WESKLER	45-0/100	107	12 MO.	04/11	
INCLINOMETER	MITUTOYO	PRO 360	950-315	N/A	BEFORE USE	
STEEL TAPE	STANLEY	FAT MAX	33-890	12 MO.	01/12	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	03/12	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	03/12	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	03/12	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	03/12	
SPRING SCALE	CHATILLON	DPP-10	4729	12 MO.	BEFORE USE	

SECTION 5
PHOTOGRAPHS



2012 MAZDA 5 SPORT MT
NHTSA NO. CC5400
FMVSS NO. 114

FIGURE 5.1
¾ FRONTAL VIEW FROM LEFT SIDE OF VEHICLE

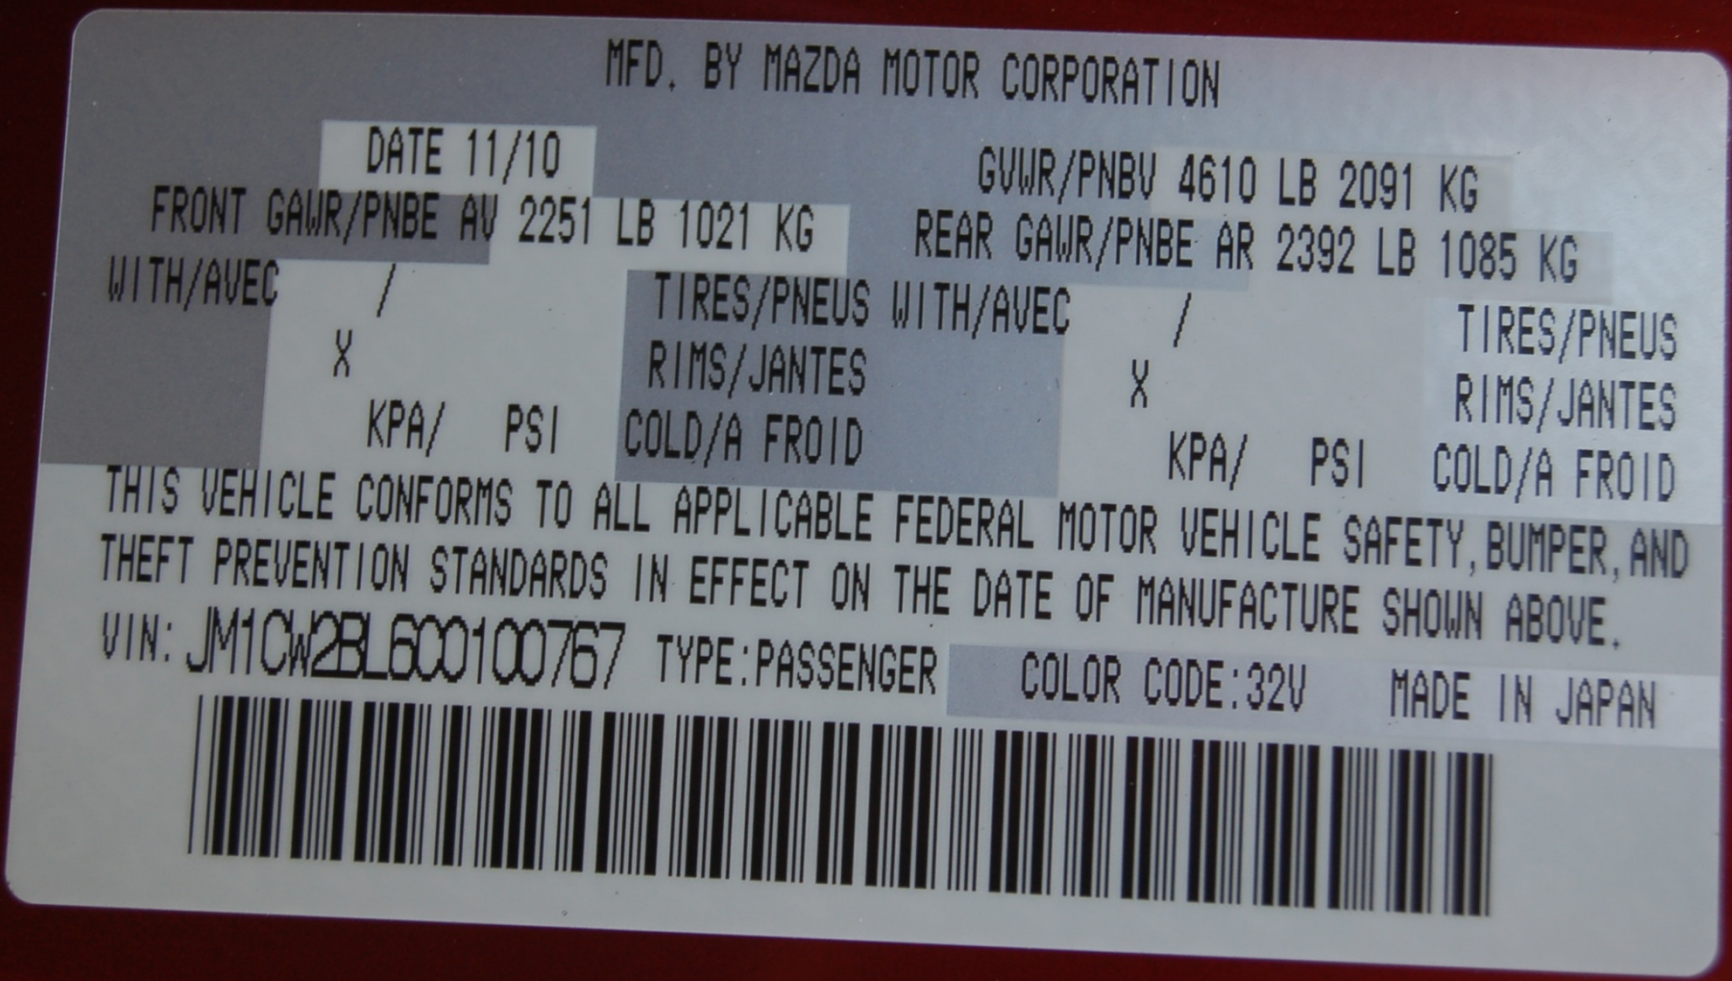

2012 MAZDA 5 SPORT MT
 NHTSA NO. CC5400
 FMVSS NO. 114

FIGURE 5.2
 VEHICLE CERTIFICATION LABEL



TIRE AND LOADING INFORMATION
RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

SEATING CAPACITY | TOTAL 6 | FRONT 2 | REAR 4
 NOMBRE DE PLACES | TOTAL 6 | AVANT 2 | ARRIÈRE 4

The combined weight of occupants and cargo should never exceed 462 kg or 1020 lbs.*
 Le poids total des occupants et du chargement ne doit jamais dépasser 462 kg ou 1020 lb.*

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS À FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION
FRONT AVANT	P205/55R16	240kPa, 35psi	VOIR LE MANUEL DEL'USAGER POUR PLUS DE RENSEIGNEMENTS
REAR ARRIÈRE	P205/55R16	240kPa, 35psi	
SPARE DE SECOURS	T125/70D16	420kPa, 60psi	

(CG36A)

CC5100

2012 MAZDA 5 SPORT MT
 NHTSA NO. CC5400
 FMVSS NO. 114

FIGURE 5.3
 VEHICLE TIRE INFORMATION LABEL



2012 MAZDA 5 SPORT MT
NHTSA NO. CC5400
FMVSS NO. 114

FIGURE 5.4
CLOSE-UP VIEW OF IGNITION KEY



2012 MAZDA 5 SPORT MT
NHTSA NO. CC5400
FMVSS NO. 114

FIGURE 5.5
IGNITION SWITCH



2012 MAZDA 5 SPORT MT
NHTSA NO. CC5400
FMVSS NO. 114

FIGURE 5.6
TRANSMISSION GEAR SELECTION CONTROL